

21 August 2014

EAST ALTAN TOLGOI DRILLING CONTINUES TO DEFINE HIGH-GRADE COPPER-GOLD MINERALISATION

HIGHLIGHTS

- East Altan Tolgoi is a significant new discovery at the Kharmagtai project with multiple intersections of hundreds of metres grading better than 1% CuEq between depths of 50m and 700m from surface.
- The Altan Tolgoi system has an overall strike length of over 800m and remains open to the west, east and at depth.
- KHDDH346 intersects high-grade, copper-gold mineralisation hosted in a broad zone of tourmaline breccia mineralisation of 390m @ 0.51% Cu & 0.26g/t Au (0.67% CuEq) from 116m.
- KHDDH346 significant high-grade intervals include:
 - o 122.7m @ 1.03% Cu & 0.56g/t Au (1.38% CuEq) from 307.3m including
 - o 46.0m @ 1.55% Cu & 1.11g/t Au (2.26% CuEq) from 384.0m; and
 - o 59.4m @ 0.89% Cu & 1.14g/t Au (1.60% CuEq) from 578.6m; including
 - o 39.4m @ 1.16% Cu & 1.6g/t Au (2.16% CuEq) from 578.6m.
- KHDDH347 has been assayed to a down-hole depth of 550m intersecting 402m @ 0.4% Cu & 0.36g/t Au (0.63% CuEq) from 148m. Assays are still pending from 550m with visual copper sulphide mineralisation extending to 650m (EOH).
- KHDDH347 significant intervals include:
 - o 28m @ 0.72% Cu & 0.46g/t Au (1.01% CuEq) from 350m; and
 - o 50m @ 0.58% Cu & 0.65g/t Au (1.00% CuEq) from 382m; and
 - o 11m @ 0.52% Cu & 0.79g/t Au (1.02% CuEq) from 450m; and
 - o 77m @ 0.55% Cu & 0.75g/t Au (1.02% CuEq) from 471m.
- KHDDH350 has intersected visible copper sulphides from 30m to the current hole depth of 420m. KHDDH350 is an 80m step-out to the south of KHDDH343 and will help define the true width of the recently discovered East Altan Tolgoi.
- KHDDH351 has intersected visible copper sulphides from 208m to the current hole depth of 390m. KHDDH351 is a 190m step-out to the east of KHDDH346 and extends the east-west strike of the Altan Tolgoi system to over 800m.

RESULTS & INTERPRETATION

Xanadu Mines Ltd (ASX: XAM – “Xanadu”) is pleased to announce the complete assay results for KHDDH346 (120m to the east of KHDDH344 and drilled to a final depth of 680.7m) and KHDDH347 (50m to the west of KHDDH343 and drilled to a final depth of 704.7m) at the Kharmagtai project. Drill hole details are shown in Table 1 and Figures 1 to 3. Assay results are presented in Table 2. Photographs of representative sections are shown in Figures 4 and 5.

The results for diamond drill hole KHDDH346 confirms the discovery of broad zones of very significant high-grade, copper-gold mineralisation (greater than 1% CuEq) hosted in tourmaline breccias at East Altan Tolgoi. Diamond drill hole KHDDH347 has been assayed to a down-hole depth of 550m and provides further confirmation of the continuity of the Altan Tolgoi system. Assays are still pending for KHDDH347 from 550m with visual copper sulphide mineralisation extending to 650m (EOH).

The tourmaline breccias at East Altan Tolgoi overprint stockwork mineralisation. The copper mineralisation occurs predominantly as matrix infill comprising chalcopyrite, pyrite and trace bornite. The style of mineralisation indicates the breccias are zoned around a high-grade core characterised by potassic alteration. Hematite dusting is a common alteration product in the high-grade mineralisation giving breccias and the host rocks a distinctive pink-orange colour (Figures 4 and 5). These newly discovered tourmaline breccias are regarded as part of a major copper-gold mineralised system with significant exploration potential. The total extent of tourmaline breccia may be related to a large geophysical anomaly extending up to 3.5km to the east. Exploration drilling will continue to target the mineralisation both along strike to the east and west as well as at depth beneath the current intercepts.

Xanadu’s Managing Director, Mr George Lloyd, said: “This is the first time we have encountered copper grades greater than 1% over significant intervals at Kharmagtai. The corresponding gold sends the copper equivalent grades over 2%. It is becoming apparent that the newly discovered tourmaline breccias at East Altan Tolgoi are introducing significant amounts copper and gold. The breccia system displays clear zonation allowing us to continue to vector into to the high-grade core. This is an outstanding result that has significantly shifted our understanding of the potential of the Kharmagtai porphyry district.”

ALTAN TOLGOI DRILL HOLES IN PROGRESS

KHDDH350 has been collared 80m to the south of KHDDH343 (Figure 1). The purpose of this drill hole is to test the width of the newly discovered high-grade tourmaline breccia mineralisation. It is at a current hole depth of 420m and continues to intersect strong visible copper sulphides from a depth of 30m. The copper sulphide mineralisation predominantly comprises tourmaline breccia-hosted mineralisation hosted in strongly tourmaline-magnetite altered quartz monzodiorite porphyry.

KHDDH351 has been collared 190m to the east of KHDDH346 (Figure 1). The purpose of this drill hole is to test the east-west strike of the newly discovered high-grade tourmaline breccia mineralisation. It has intersected visible copper sulphides from a depth of 208m to the current depth of 390m. The copper mineralisation is primarily hosted in tourmaline breccias and minor dissemination in strongly potassic altered quartz monzodiorite porphyry.

The continuous strike length of the entire Altan Tolgoi system has been demonstrated to be over 800m on results to date including KHDDH351. The prospect remains open to the west, east and at depth.

TSAGAAN SUDAL, WEST ALTAN TOLGOI & PIGEON UPDATE

Xanadu continues to define significant zones of mineralisation at other prospects and test new targets within the Kharmagtai district. Recent drill holes include:

- KHDDH345 at Tsagaan Sudal continues to define the higher-grade mineralisation that was identified in KHDDH337 and KHDDH340. KHDDH345 results include 426.75m grading 0.26% Cu and 0.28g/t Au (0.44% CuEq) from 0.6m including 148m grading 0.35% Cu & 0.45g/t Au (0.64% CuEq) from 232.0m. Previous exploration drilling at Tsagaan Sudal was sparse despite the substantial size of the system. The recent drilling has successfully defined a higher-grade (greater than 0.6% CuEq) core that remains open to the west and at depth;
- KHDDH348 was designed to target a southwest extension of the southern stockwork zone of Altan Tolgoi. No significant assay results were encountered and testing of this target will continue; and
- KHDDH349 was designed to test the Pigeon anomaly approximately 1km east of current drilling within the Kharmagtai intrusive complex. The hole encountered porphyry mineralisation and alteration. These results provide a useful vector towards a potential high-grade zone within a significant geophysical target.

The Kharmagtai district has great potential to host multiple, mineralised prospects – Xanadu’s exploration team continues to refine the Kharmagtai geological model to delineate high-grade zones and identify new targets.

For further information, please contact:

George A. Lloyd
Managing Director
T: +852 6397 3308
george.lloyd@xanadumines.com

www.xanadumines.com

KHARMAGTAI PROJECT & THE MONGOL METALS JV

Xanadu and its joint venture partner, Mongol Metals LLC, announced the acquisition of a 90% interest in the Kharmagtai porphyry copper-gold project from Turquoise Hill Resources in February 2014. Under the Mongol Metals LLC joint venture terms, Xanadu has the right to earn an 85% interest in Mongol Metals LLC, equivalent to a 76.5% effective project interest, by funding acquisition and exploration costs.

The Kharmagtai project is located in the under-explored South Gobi porphyry copper province which hosts the world-class Oyu Tolgoi copper-gold operation, the Tsagaan Survaga porphyry copper-molybdenum development and Xanadu’s Oyut Ulaan copper-gold exploration project. The Kharmagtai project is located within the Omnogovi Province, approximately 420km south southwest of Ulaanbaatar and 60km north of the Tavan Tolgoi coal deposit.

The Kharmagtai project is an advanced exploration project consisting of multiple co-genetic gold-rich porphyry copper centres and tourmaline breccia pipes occurring within the Lower Carboniferous Kharmagtai Igneous Complex. Exploration has identified significant shallow high-grade porphyry copper-gold mineralisation. A majority of the mineralised porphyry complex lies under un-explored shallow sediments. The large licence area has only been partially explored and the potential for further discoveries remains high.

COMPETENT PERSONS STATEMENT

The information in this report relating to Exploration Results is based on information compiled or reviewed by Dr. Andrew Stewart, who is an employee of Xanadu and is a Member of the Australasian Institute of Geoscientists. Dr. Andrew Stewart has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activity he is undertaking to qualify as the “Competent Person” as defined in the 2012 Edition of the “Australasian Code for Reporting Exploration Results, Mineral Resources and Ore Reserves”. Dr. Andrew Stewart consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

TABLE 1: DRILL COLLARS

Set out below are the details for recent drill collars at Kharmagtai.

Hole	Prospect	East	North	RL	Azimuth	Incline	Depth (m)
KHDDH345	Tsagaan Sudal	592064	4877382	1,303.0	176	-73	427.0
KHDDH346	East Altan Tolgoi	592849	4877850	1,282.0	175	-80	680.7
KHDDH347	East Altan Tolgoi	592635	4877888	1,272.0	175	-80	704.7
KHDDH348	Pigeon	593773	4877328	1,285.0	175	-80	380.7
KHDDH349	West Altan Tolgoi	592182	4877850	1,269.0	175	-80	335.7
KHDDH350	East Altan Tolgoi	592700	4877806	1,285.0	176	-80	In progress
KHDDH351	East Altan Tolgoi	593010	4877750	1,284.0	176	-77	In progress

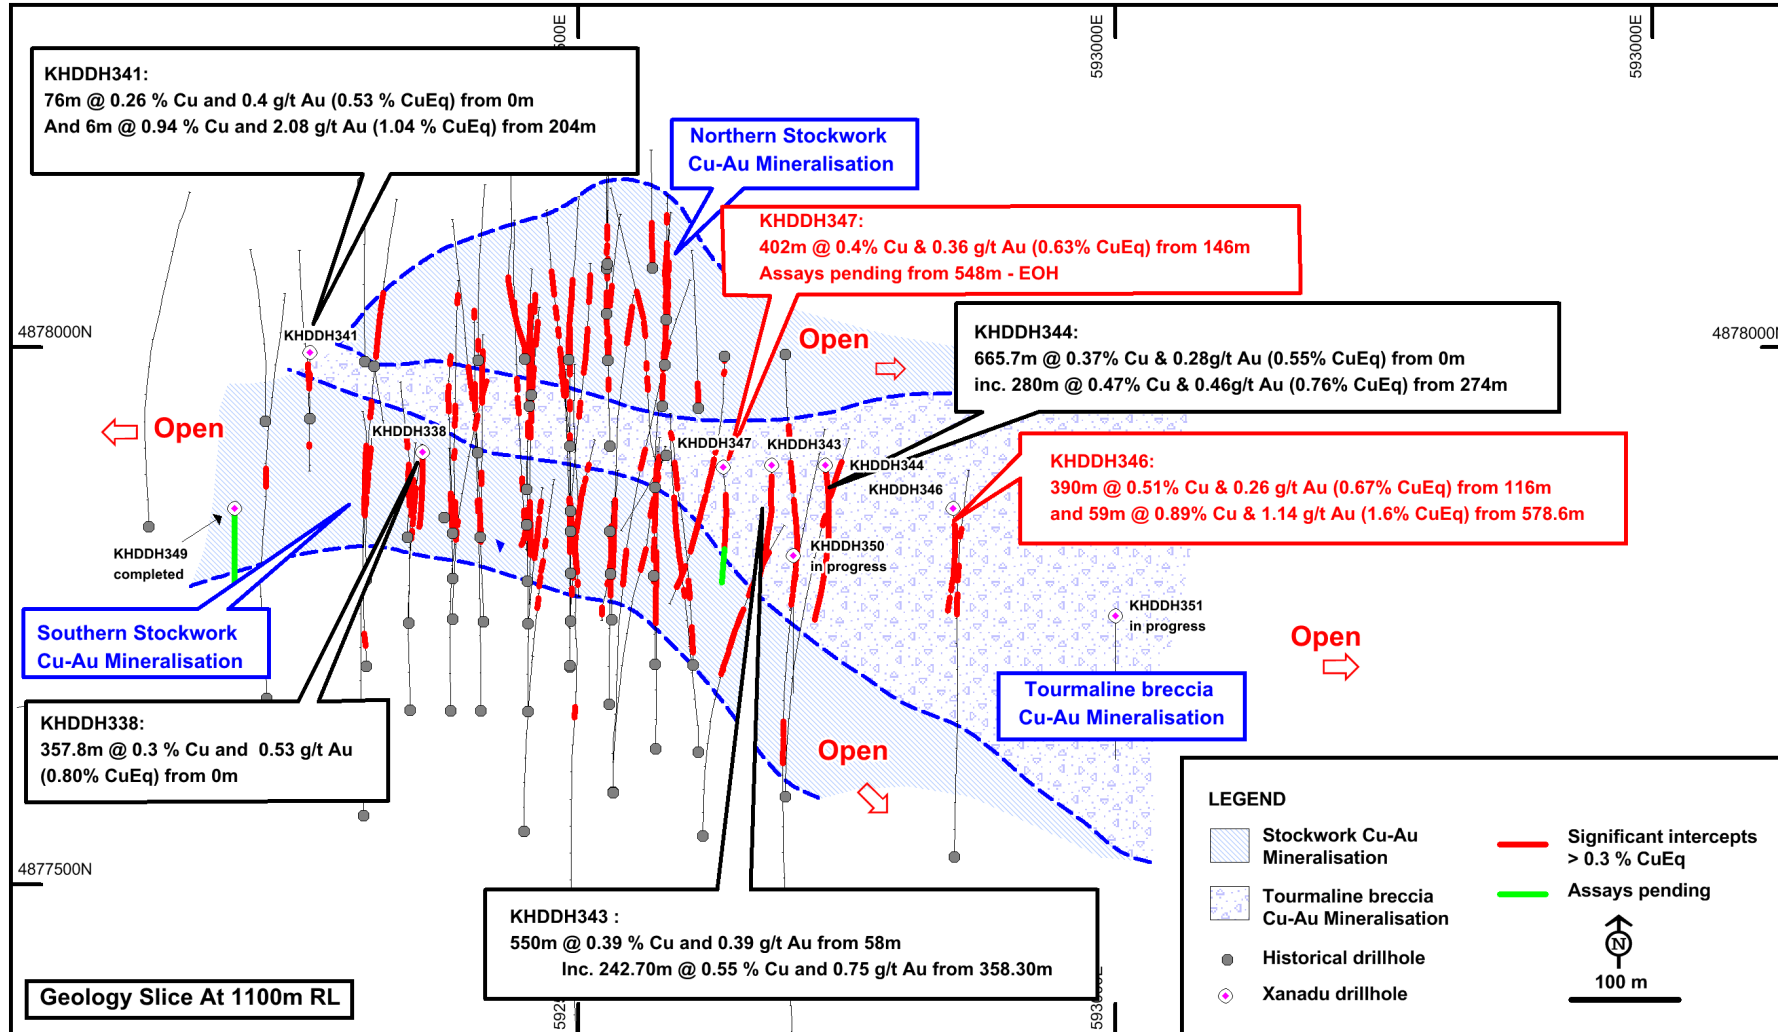
For personal use only

TABLE 2: ASSAY RESULTS

Below is a summary of significant intercepts for KHDDH345, KHDDH346, and KHDDH347 at Kharmagtai.


Hole	Prospect	From (m)	To (m)	Interval (m)	Cu (%)	Au (g/t)	CuEq (%)
KHDDH345	Tsagaan Sudal	0.6	426.75	426.15	0.26	0.28	0.44
	<i>including</i>	318.0	378.0	60.0	0.45	0.62	0.84
	<i>including</i>	320.0	340.0	20.0	0.54	0.76	1.01
	<i>and</i>	352.0	378.0	26.0	0.47	0.65	0.88
KHDDH346	East Altan Tolgoi	116.0	506.0	390.0	0.51	0.26	0.67
	<i>including</i>	307.3	430.0	122.7	1.03	0.56	1.38
	<i>including</i>	384.0	430.0	46.0	1.55	1.11	2.26
	<i>including</i>	458.2	465.7	7.5	0.66	0.94	1.25
	<i>and</i>	530.0	534.0	4.0	0.56	0.62	0.94
	<i>and</i>	578.6	638.0	59.4	0.89	1.14	1.60
	<i>including</i>	578.6	618.0	39.4	1.16	1.60	2.16
KHDDH347	East Altan Tolgoi	146.0	548.0	402.0	0.40	0.36	0.63
	<i>including</i>	350.0	370.0	20.0	0.83	0.56	1.19
	<i>including</i>	382.0	432.0	50.0	0.58	0.65	1.00
	<i>including</i>	450.0	461.0	11.0	0.52	0.79	1.02
	<i>including</i>	484.0	548.0	64.0	0.60	0.85	1.14

The copper equivalent (CuEq) calculation represents the total metal value for each metal, multiplied by the conversion factor, summed and expressed in equivalent copper percentage. Grades have not been adjusted for metallurgical or refining recoveries and the copper equivalent grades are of an exploration nature only and intended for summarising grade. The copper equivalent calculation is intended as an indicative value only. The following copper equivalent conversion factors and long-term price assumptions have been adopted: Copper Equivalent Formula (CuEq) = Cu% + (Au (ppm) x 0.6284); Price assumptions: Cu (US\$3.20lb) and Au (US\$1,375oz).

FIGURE 1: ALTAN TOLGOI PLAN


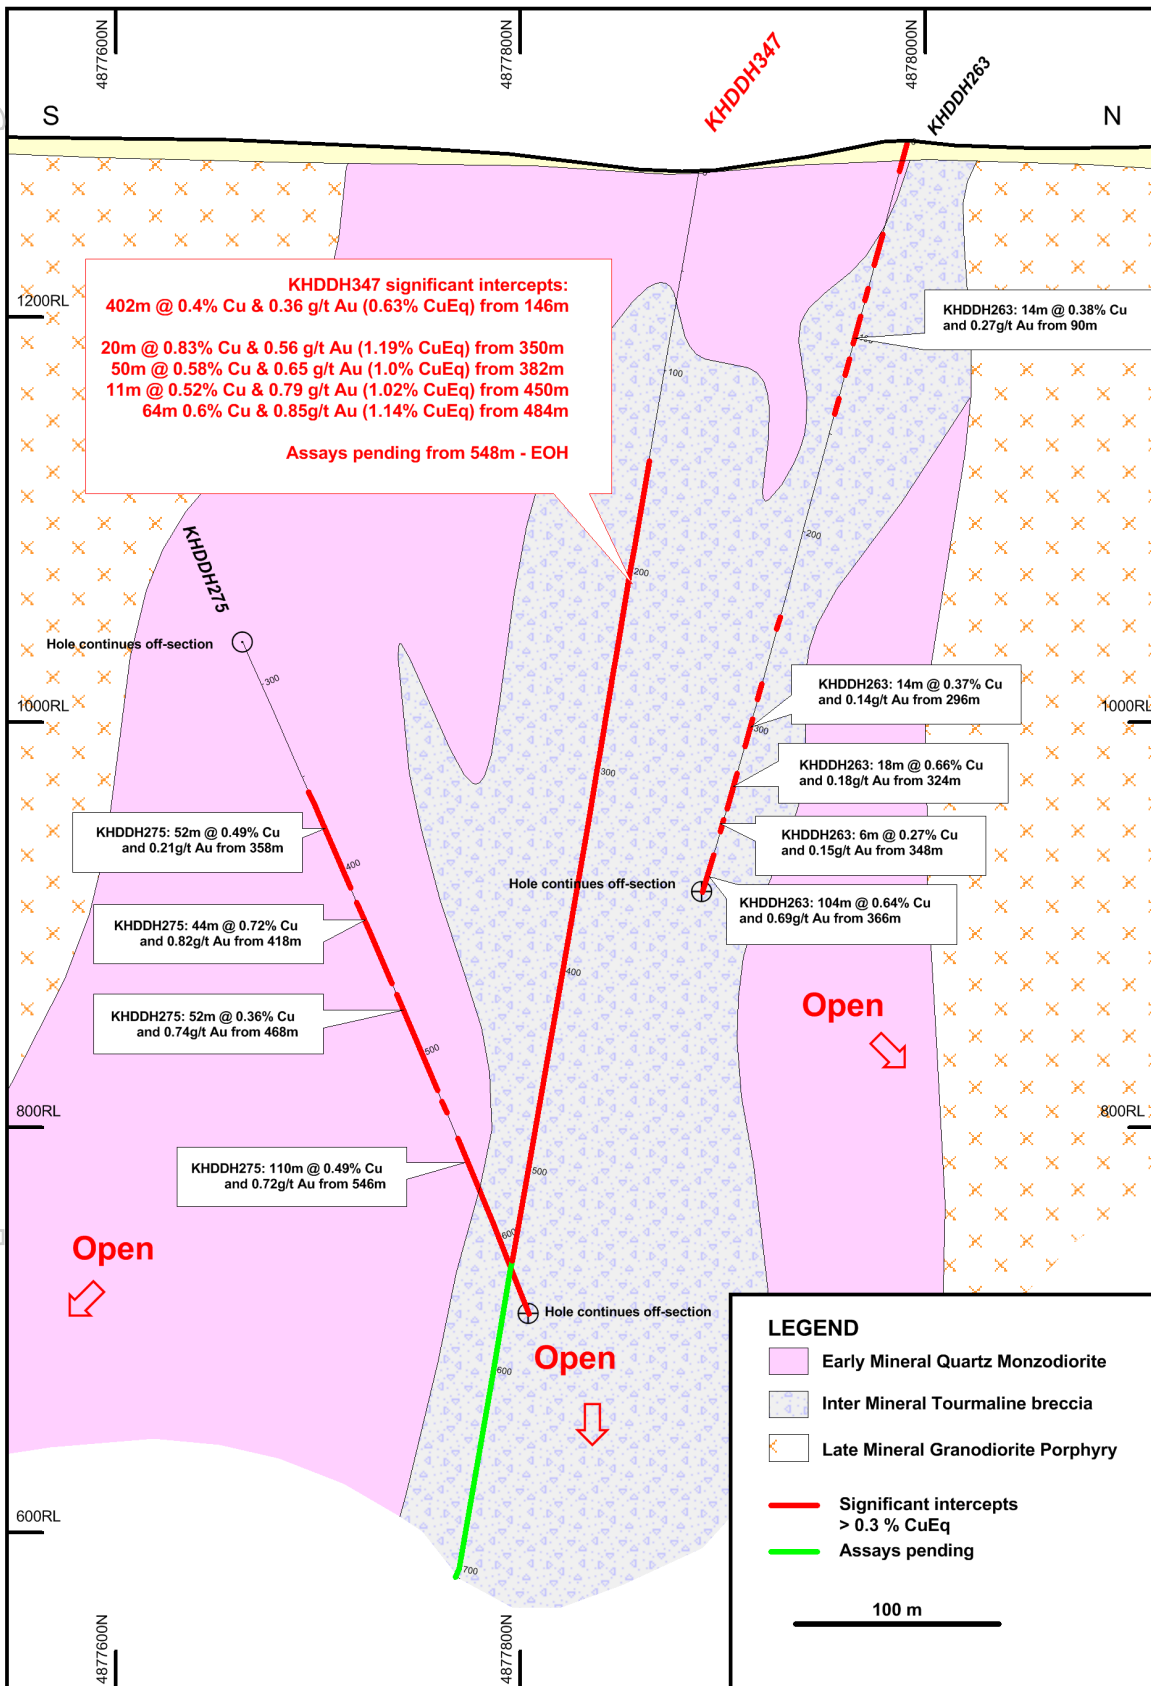
Plan of Altan Tolgoi showing location of recently completed drill holes KHDDH346 and KHDDH347. Also shown are KHDDH350 and KHDDH351 that are in progress.

For personal use only

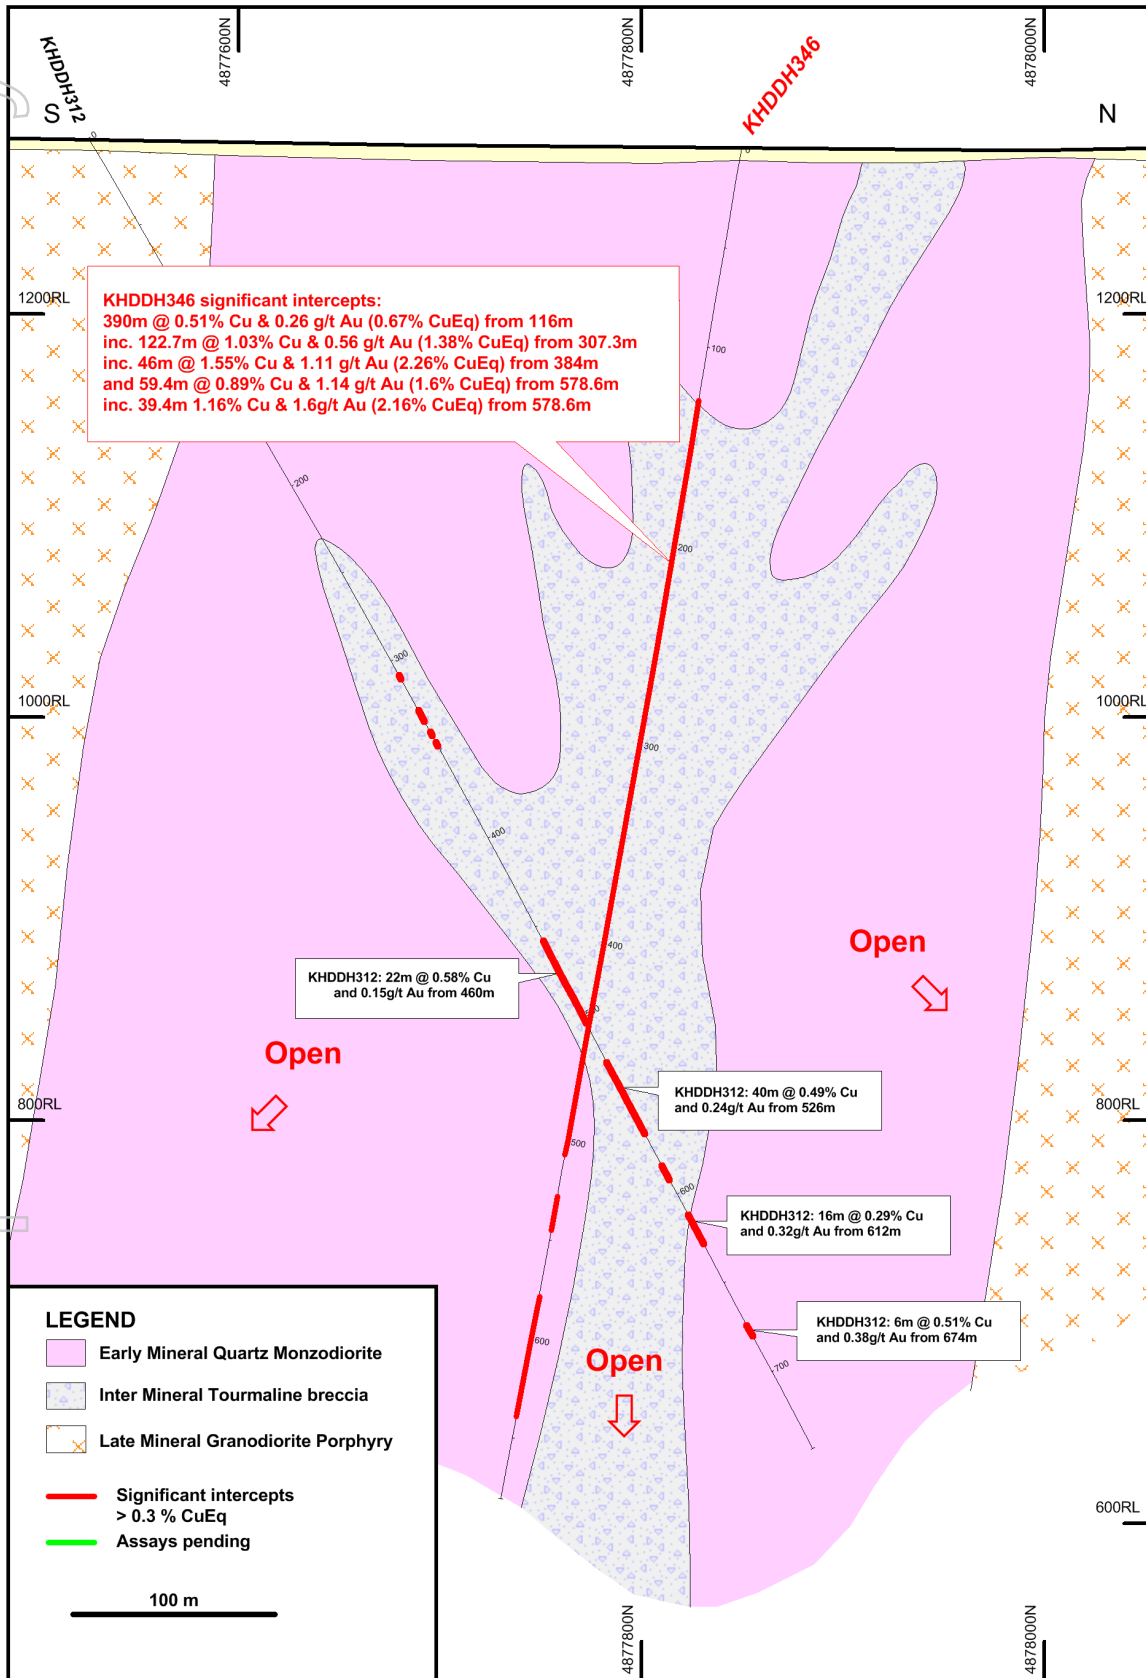FIGURE 2: KHDDH346 CROSS SECTION


Altan Tolgoi cross section showing recently completed drill hole KHDDH346.


FIGURE 3: KHDDH347 CROSS SECTION



Altan Tolgoi cross section showing recently completed drill hole KHDDH347.

FIGURES 4 & 5: KHDDH346 CORE SAMPLE


 **KHDDH346 – HIGH GRADE TOURMALINE BRECCIA**

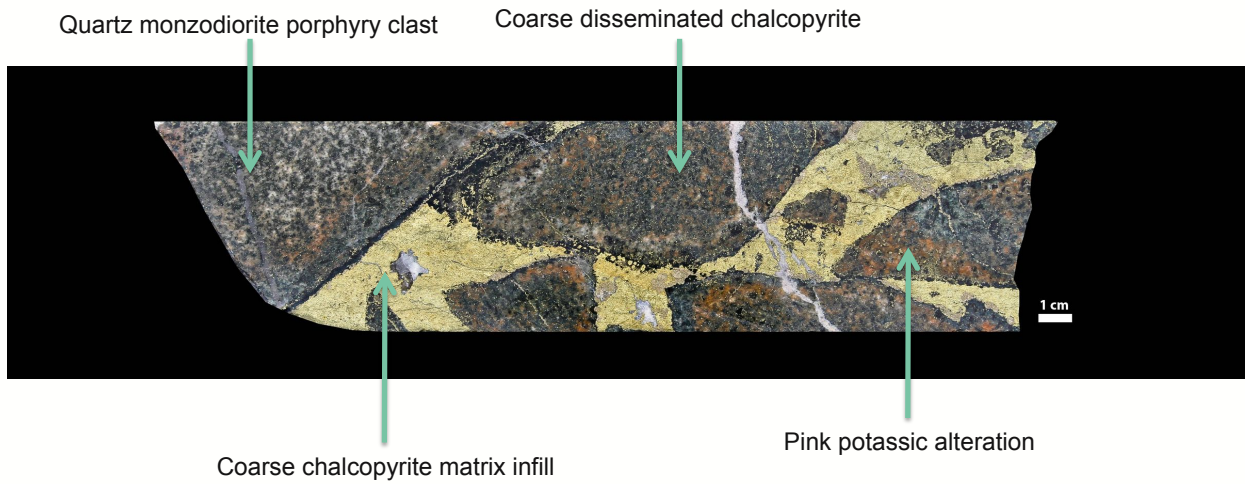

KHDDH346: 415.5m. From a 2m interval (414m to 416m) that assayed 5.16% Cu & 3.44 g/t Au

XANADU MINES (ASX:XAM)

 **KHDDH346 – HIGH GRADE TOURMALINE BRECCIA**

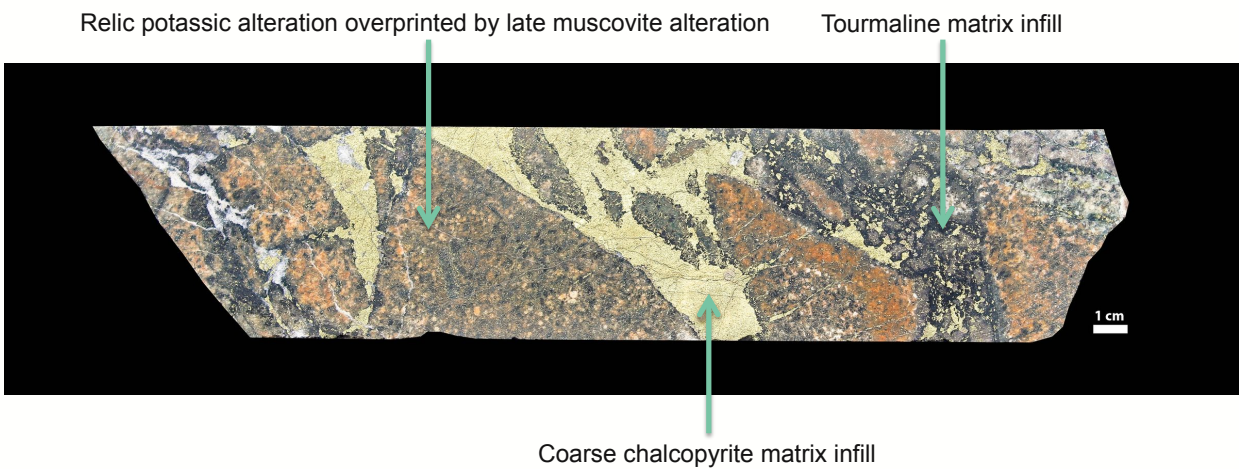

KHDDH346: 419.5m. From a 2m interval (418m to 420m) that assayed 2.86% Cu & 2.13 g/t Au

XANADU MINES (ASX:XAM)

For personal use only

APPENDIX 1: KHARMAGTAI TABLE 1 (JORC 2012)

Set out below is Section 1 and Section 2 of Table 1 under the JORC Code, 2012 Edition for the Kharmagtai project. Data provided by Turquoise Hill and Xanadu. This Table 1 updates the JORC Table 1 disclosure dated 11 August 2014.

1.1 JORC TABLE 1 - SECTION 1 - SAMPLING TECHNIQUES AND DATA

(Criteria in this section apply to all succeeding sections).

Criteria	JORC Code Explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling and assaying. Measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. 	<ul style="list-style-type: none"> The resource estimate is based on drill samples only. Representative 2 metre samples were taken from (½ NQ or HQ) or diamond. Only assay result results from recognised, independent assay laboratories were used in Resource calculation after QAQC was verified.
Drilling techniques	<ul style="list-style-type: none"> Drill type and details. 	<ul style="list-style-type: none"> DDH drilling has been the primary drilling method.
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> DDH core recoveries have been very good, averaging between 97% and 99% for all of the deposits. In localized areas of faulting and/or fracturing the recoveries decrease; however this is a very small percentage of the overall mineralised zones. Recovery measurements were collected during all DDH programs. The methodology used for measuring recovery is standard industry practice. Analysis of recovery results vs. grade indicates no significant trends. Indicating bias of grades due to diminished recovery and / or wetness of samples.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> Drill samples are logged for lithology, mineralisation and alteration and geotechnical aspects using a standardised logging system, including the recording of visually estimated volume percentages of major minerals. Drill core was photographed after being logged by a geologist. The entire interval drilled has been logged by a geologist.
Sub-sampling techniques and	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. 	<ul style="list-style-type: none"> DDH Core is cut in half with a diamond saw, following the line marked by the



Criteria	JORC Code Explanation	Commentary
sample preparation	<ul style="list-style-type: none"> If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<p>geologist. The rock saw is regularly flushed with fresh water.</p> <ul style="list-style-type: none"> Sample intervals are a constant 2m interval down-hole in length. Routine sample preparation and analyses of DDH samples were carried out by SGS Mongolia LLC (SGS Mongolia), who operates an independent sample preparation and analytical laboratory in Ulaanbaatar. All samples were prepared to meet standard quality control procedures as follows: Crushed to 90% passing 3.54 mm, split to 1kg, pulverised to 90% - 95% passing 200 mesh (75 microns) and split to 150g. Certified reference materials (CRMs), blanks and pulp duplicate were randomly inserted to manage the quality of data Sample sizes are well in excess of standard industry requirements.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<ul style="list-style-type: none"> All samples were routinely assayed by SGS Mongolia for gold, copper, silver, lead, zinc, arsenic and molybdenum. Au is determined using a 30g fire assay fusion, cupelled to obtain a bead, and digested with Aqua Regia, followed by an atomic absorption spectroscopy (AAS) finish, with a lower detection (LDL) of 0.01 ppm. Cu, Ag, Pb, Zn, As and Mo were routinely determined using a three-acid-digestion of a 0.3g sub-sample followed by an AAS finish (AAS21R). Samples are digested with nitric, hydrochloric and perchloric acids to dryness before leaching with hydrochloric acid to dissolve soluble salts and made to 15ml volume with distilled water. The LDL for copper using this technique was 2ppm. Where copper is over-range (>1% Cu), it is analysed by a second analytical technique (AAS22S), which has a higher upper detection limit (UDL) of 5% copper. Quality assurance was provided by introduction of known certified standards, blanks and duplicate samples on a routine basis. Assay results outside the optimal range for methods were re-analysed by appropriate methods.

For personal use only



Criteria	JORC Code Explanation	Commentary
		<ul style="list-style-type: none"> Ore Research Pty Ltd certified copper and gold standards have been implemented as a part of QAQC procedures, as well as coarse and pulp blanks, and certified matrix matched copper--gold standards. QAQC monitoring is an active and ongoing process on batch by batch basis by which an acceptable results are re-assayed as soon as practicable.
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> All assay data QAQC is checked prior to loading into the GeoBank data base. The data is managed XAM geologists. The data base and geological interpretation is collectively managed by XAM.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> All DDH's have been surveyed with a differential global positioning system (DGPS) to within 10cm accuracy. All DDH's have been down hole surveyed to collect the azimuth and inclination at specific depths. Two principal types of survey method have been used over the duration of the drilling programs including Eastman Kodak and Flexit. UTM WGS84 48N grid. The DTM is based on 1 m contours with an accuracy of ±0.01 m.
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<ul style="list-style-type: none"> Drilling has been completed on nominal north-south sections, commencing at 100m spacing and then closing to 50m for resource estimation. Vertical spacing of intercepts on the mineralised zones similarly commences at 100m spacing and then closing to 50m for resource estimation. Drilling has predominantly occurred with angled holes approximately 70° to 60° inclination below the horizontal and either drilling to north or south, depending on the dip of the target mineralised zone. Holes have been drilled to 1000m vertical depth The data spacing and distribution is sufficient to establish geological and grade continuity appropriate for the

For personal use only



Criteria	JORC Code Explanation	Commentary
		Mineral Resource estimation procedure and has been taken into account in 3D space when determining the classifications to be applied.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> Drilling has been predominantly completed on north-south section lines along the strike of the known mineralised zones and from either the north or the south depending on the dip. Vertical to South dipping ore bodies were predominantly drilled to the north. Scissor Drilling, (drilling from both north and south), as well as vertical drilling, has been used in key mineralised zones to achieve unbiased sampling of possible structures and mineralised zones.
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<ul style="list-style-type: none"> Samples are dispatched from site through via company employees to the Laboratories. Samples are signed for at the Laboratory with confirmation of receipt emailed through. Samples are then stored at the lab and returned to a locked storage site.
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data 	<ul style="list-style-type: none"> Internal audits of sampling techniques and data management on a regular basis, to ensure industry best practice is employed at all times. External review and audit have been conducted by the following groups 2012 – AMC Consultants Pty Ltd. was engaged to conduct an Independent Technical Report which reviewed drilling and sampling procedures. It was concluded that sampling and data record was appropriate for use in resource estimation including that required by the NI 43-101 standards. 2013 - Mining Associates Ltd. was engaged to conduct an Independent Technical Report to review drilling, sampling techniques, QAQC and previous resource estimates. Methods were found to conform to international best practice.

For personal use only

1.2 JORC TABLE 1 - SECTION 2 - REPORTING OF EXPLORATION RESULTS

(Criteria in this section apply to all succeeding sections).

Criteria	JORC Code Explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> The Project comprises 1 Mining Licences (MV 17387A). 100% owned by Oyut Ulaan LLC. THR Oyu Tolgoi Ltd (a wholly owned subsidiary of Turquoise Hill Resources Ltd owns 90% of Oyut Ulaan LLC. The remaining 10% is owned by Quincunx Ltd, which in turn is owned by an incorporated joint venture between Kerry Holdings Ltd. and MCS Holding LLC. The Mongolian Minerals Law (2006 and Mongolian Land Law (2002) govern exploration, mining and land use rights for the project.
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Previous exploration was conducted by Quincunx Ltd, Ivanhoe Mines Ltd and Turquoise Hill Resources Ltd including extensive drilling, surface geochemistry, geophysics, mapping and mineral resource estimation to NI 43-101 standards.
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> The mineralisation is characterised as porphyry copper-gold type. Porphyry copper-gold deposits are formed from magmatic hydrothermal fluids typically associated with felsic intrusive stocks that have deposited metals as sulphides both within the intrusive and the intruded host rocks. Quartz stockwork veining is typically associated with sulphides occurring both within the quartz veinlets and disseminated throughout the wall rock. Porphyry deposits are typically large tonnage deposits ranging from low to high grade and are generally mined by large scale open pit or underground bulk mining methods. The deposits at Kharmagtai are atypical in that they are associated with intermediate intrusions of diorite to quartz diorite composition, however the deposits are in terms of contained gold significant, and similar gold-rich porphyry deposits.
Drill hole information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> – easting and northing of the drill hole 	<ul style="list-style-type: none"> Diamond drill holes are the principal source of geological and grade data for the Project. See Table 1 in main report.



Criteria	JORC Code Explanation	Commentary
	<ul style="list-style-type: none"> collar. - elevation or RL Reduced Level – elevation above sea level in metres) of the drill hole collar . - dip and azimuth of the hole - down hole length and interception depth - hole length. <ul style="list-style-type: none"> If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> A nominal cutoff of 0.1% Cu is used for identification of potentially significant intercepts for reporting purposes. Most of the reported intercepts are shown in sufficient detail, including maxima and subintervals, to allow the reader to make an assessment of the balance of high and low grades in the intercept. Informing Samples have been composited to two metre lengths honouring the geological domains and adjusted where necessary to ensure that no residual sample lengths have been excluded (best fit). The copper equivalent (CuEq) calculation represents the total metal value for each metal, multiplied by the conversion factor, summed and expressed in equivalent copper percentage. Grades have not been adjusted for metallurgical or refining recoveries and the copper equivalent grades are of an exploration nature only and intended for summarising grade. The copper equivalent calculation is intended as an indicative value only. The following copper equivalent conversion factors and long term price assumptions have been adopted: Copper Equivalent Formula (CuEq) = Cu% + (Au (ppm) x 0.6284); Price assumptions: Cu (US\$3.20lb) and Au (US\$1,375oz).
Relationship between mineralization on widths and intercept lengths	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a 	<ul style="list-style-type: none"> Mineralised structures are variable in orientation, and therefore drill orientations have been adjusted from place to place in order to allow intersection angles as close as possible to true widths. Exploration results have been reported as an interval with 'from' and 'to' stated in tables of significant economic intercepts. Tables clearly indicate that true widths will

For personal use only



Criteria	JORC Code Explanation	Commentary
	clear statement to this effect (eg 'down hole length, true width not known').	generally be narrower than those reported. <ul style="list-style-type: none"> Resource estimation, as reported later, was done in 3D space.
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> See figures in main report.
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> Results have been reported at a range of cut-off grades, above a minimum suitable for open pit mining.
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> Extensive work in this area has been done, and is reported separately.
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive 	<ul style="list-style-type: none"> The mineralisation is open at depth and along strike. Current estimates are restricted to those expected to be reasonable for open pit mining. Limited drilling below this depth (-300m rl) shows widths and grades potentially suitable for underground extraction. Exploration on going.

For personal use only