



13 November 2018

ASX Announcement

MUSGRAVE PROVINCE RC DRILLING OF EM TARGETS COMMENCES

Woomera Mining Limited (ASX: WML, Company) is pleased to announce that RC drilling of 5 EM conductors identified in the recent Moving Loop Electromagnetic Survey (MLEM) has commenced on the Company's Musgrave Block tenements. The 4,000 metre drilling program will test five significant conductors identified during the MLEM survey. The conductors are coincident with the magnetic features previously identified by WML and may represent copper-nickel-cobalt mineralisation in Giles Complex ultramafic intrusive rocks that underlie the tenements.



Plate 1 – TopDrill's 685 Schramm RC rig commences Musgrave drilling program for Woomera Mining Ltd

Woomera's Musgrave Alcurra-Tieyon Project

The Musgrave Alcurra-Tieyon project is the subject of a JV with OZ Minerals Ltd (ASX: OZL) that enables OZ to earn up to 75% of the project for an expenditure of \$7.5m.

The project area lies immediately east of the Anangu Pitjantjatjara Yankunytjatjara (**APY**) lands. The Stuart Highway and the Adelaide-Darwin railway pass through the project area. The exploration focus in the area is on Ni-Cu-Co.

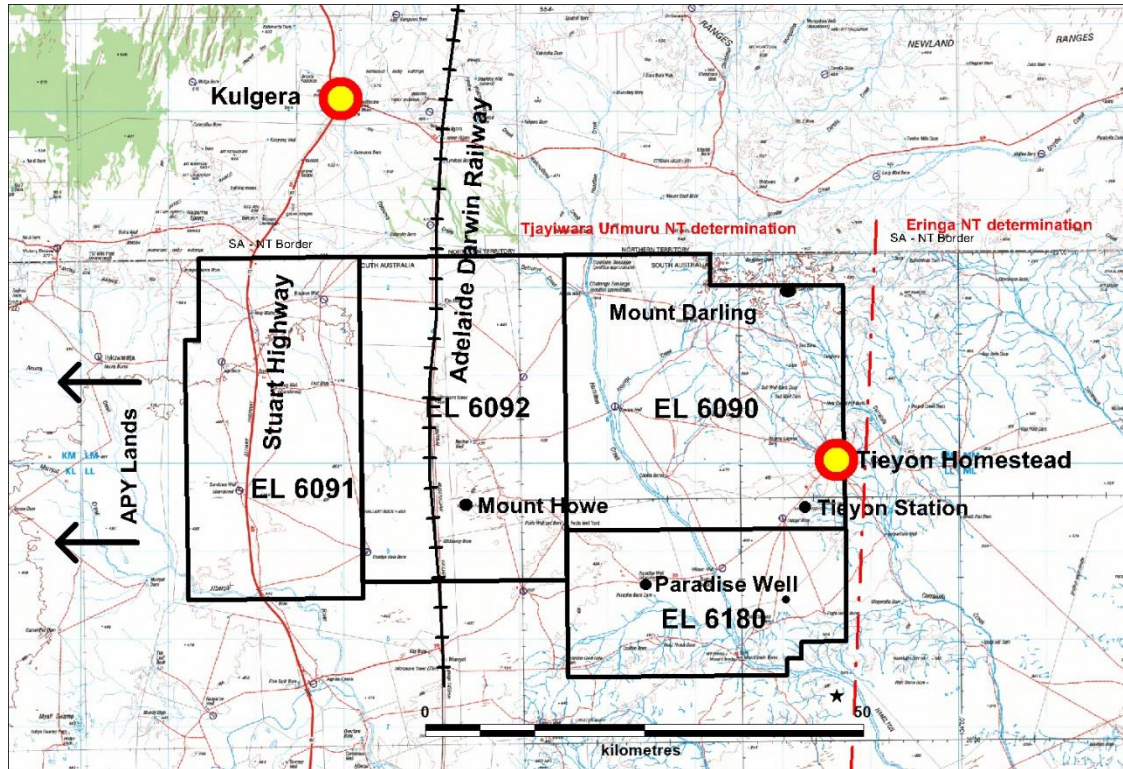


Figure 1 – Musgrave Alcurra-Tieyon project location

RC Drilling Program

The immediate exploration program has been designed to test conductors at Healy, Gallagher, O'Mahony, Walsh and Cavanagh (Figure 2).

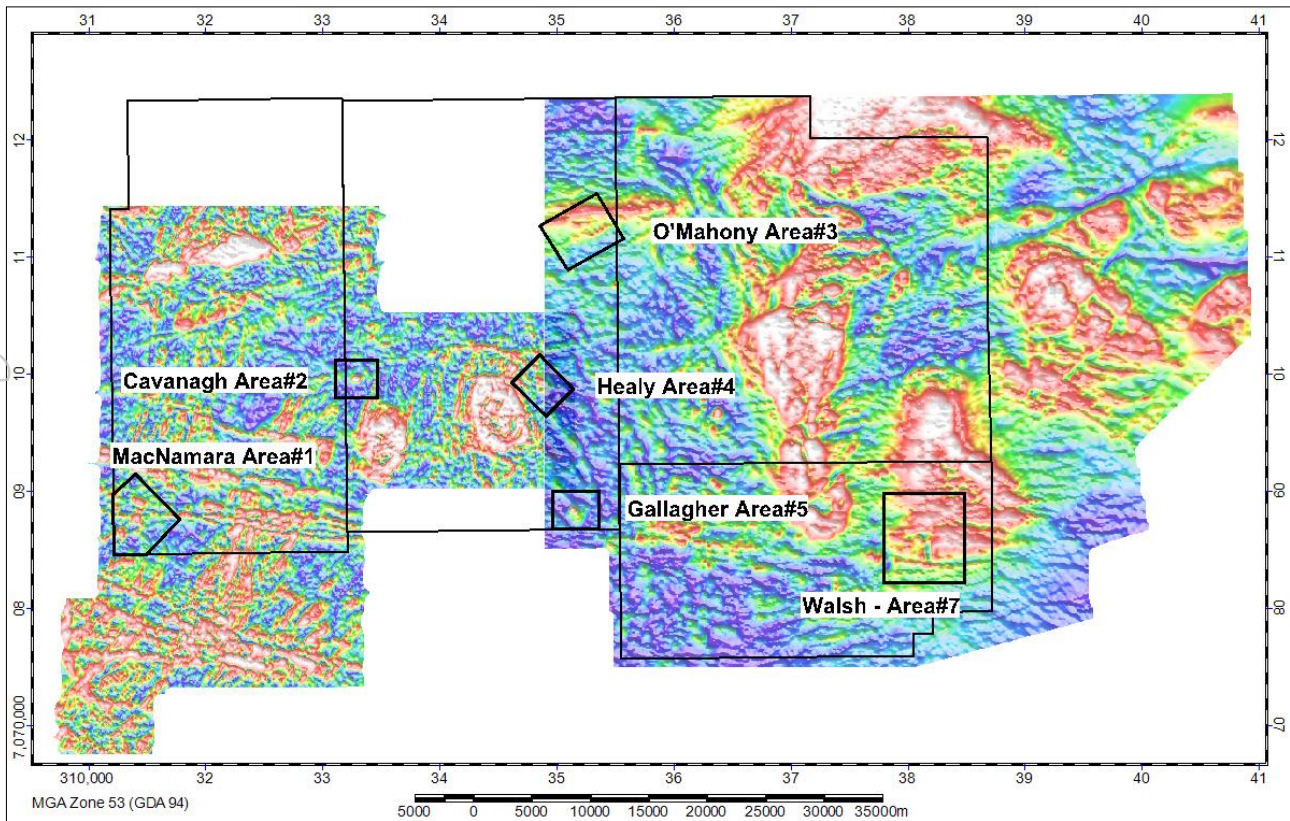


Figure 2 – RC drill targets at Healy, Gallagher, O'Mahony, Walsh and Cavanagh

Healy

The Healy area was first identified by RTZ in 1996 after flying four experimental EM lines. Further work to drill test the conductor was never carried out.

The recent MLEM survey highlighted a significant conductor at Healy which was interpreted as having potential for Ni, Cu and PGEs within layered ultramafic rocks.

Woomera's magnetic 3D inversion modelling which allows for remanence predicts a susceptible body at ~100m and several hundred metres in length.

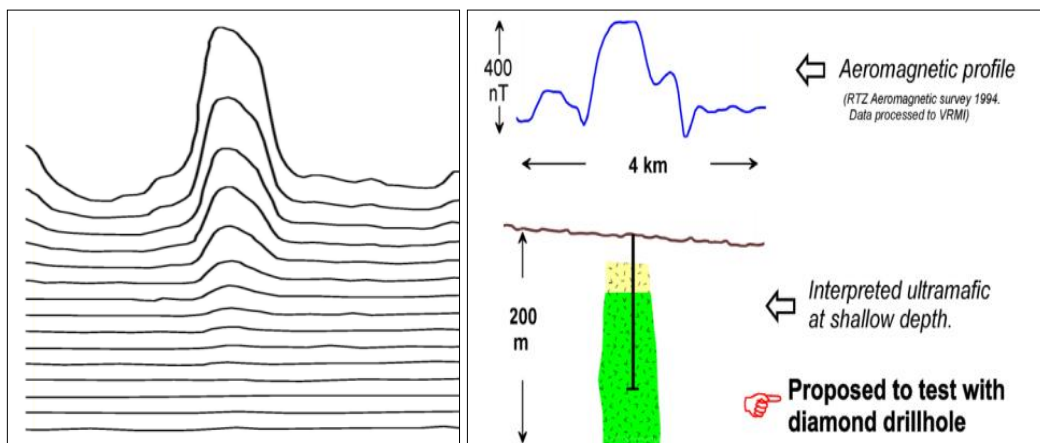


Figure 3. Airborne EM profile (RTZ Questem survey 1996) and the interpreted conductor

Gallagher

Gallagher represents a significant conductor highlighted initially from Woomera's Vector Residual Magnetic Intensity modelling and corroborated by the recent MLEM survey.

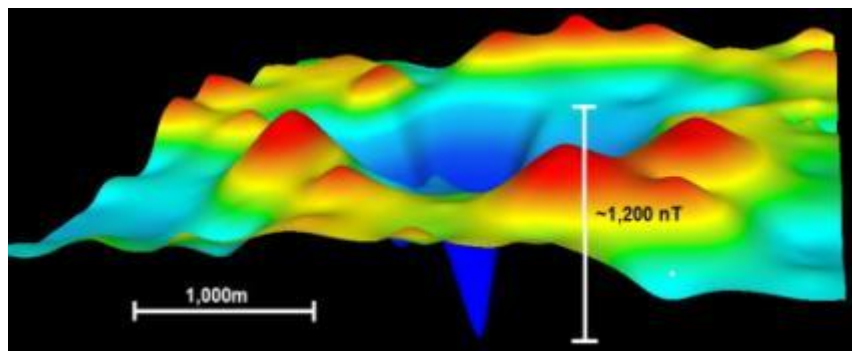


Figure 4. Gallagher TMI

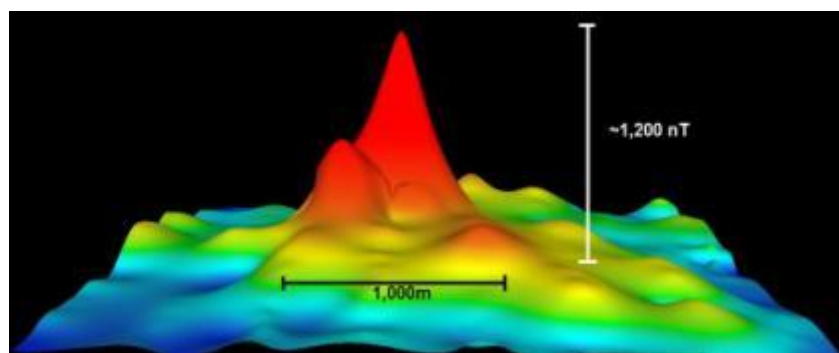


Figure 5. Gallagher magnetic field after VRMI correction

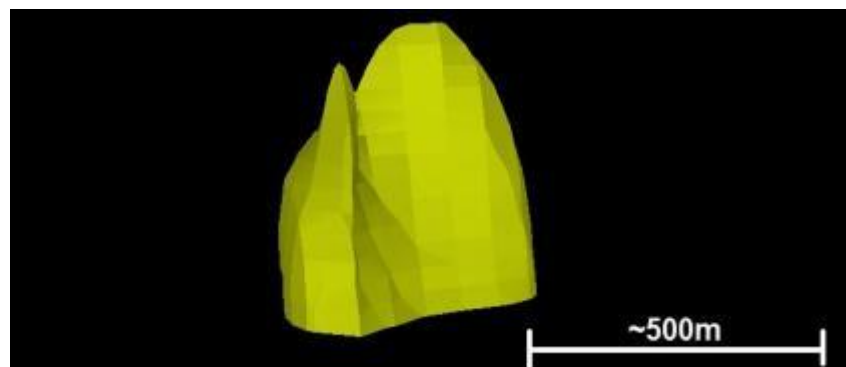


Figure 6. VRMI 3D inversion model

Cavanagh

Cavanagh was first identified by CRA as a reversely polarised magnetic feature. CRA followed up experimental airborne EM which identified an early time conductor at Cavanagh. CRA drilled one RC drill hole to 28m that intersected ultramafic rocks with anomalous Ni, Cr, Co and Cu.

VRMI modelling by Woomera identified a significant drill target (Figure 7).

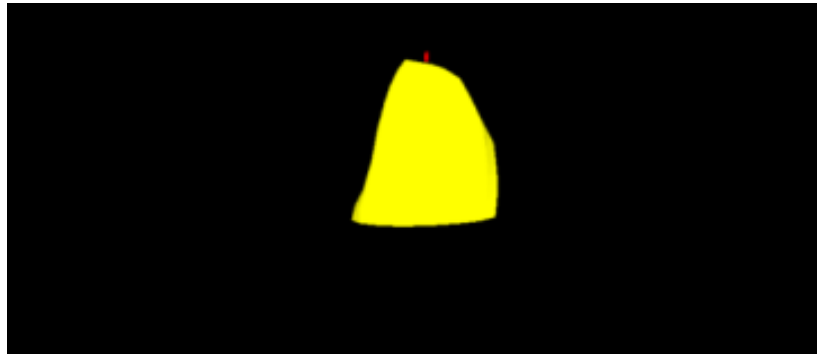


Figure 7. Modelled body with CRAE drill hole (~400m wide)

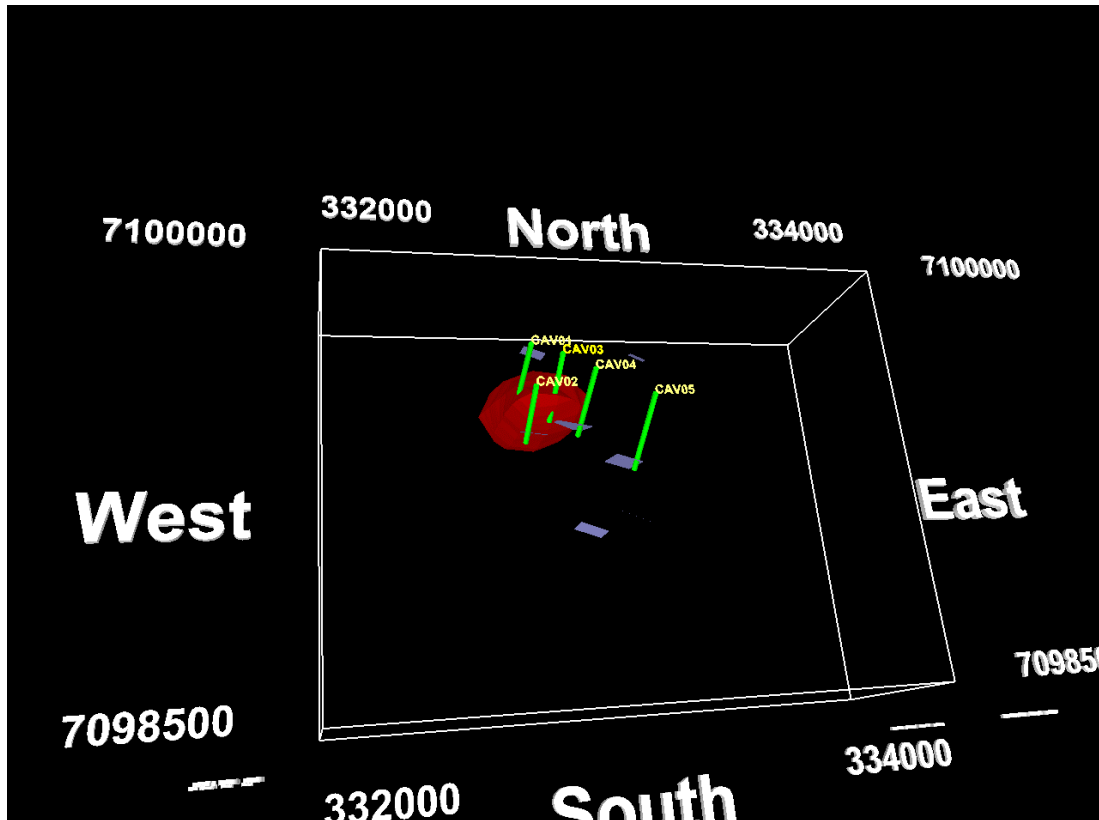


Figure 8. 3D model of discrete conductor (1,000 S) modelled from the Slingram data. Green lines are the 5 RC drill hole traces proposed to be drilled in November 2018

The 4,000m RC drill program should be completed within 3-4 weeks with results reported as they come to hand.

COMPETENT PERSONS STATEMENT

The exploration results reported herein, insofar as they relate to mineralisation, are based on information compiled by Mr Gerard Anderson, Managing Director of Woomera Mining Limited. Mr Anderson is a Member of the Australasian Institute of Mining and Metallurgy who has over forty-two years of experience in the field of activity being reported. Mr Anderson has sufficient experience which is relevant to the styles of mineralisation and types of deposit under consideration and to the activity that he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves' relating to the reporting of Exploration Results. Mr Anderson consents to the inclusion in the report of matters based on his information in the form and context in which it appears.

Gerard Anderson
Managing Director
Woomera Mining Limited

Peter Taylor
Investor Relations
0412 036 231
Peter@nwrcommunications.com.au

About Woomera Mining Limited

Woomera Mining Limited (Woomera) is an ASX listed exploration company based in Adelaide, South Australia with an extensive minerals' tenement portfolio prospective for Copper, Lithium, Gold, Uranium, Iron Ore, Nickel and Cobalt. The Woomera tenement package includes four tenements in the Musgrave Province of South Australia with several drill ready targets (**Musgrave Alcurra-Tieyon Project**) which is the subject of a binding Heads of Agreement with OZ Minerals (ASX: OZL) where OZ Minerals can elect to expend up to \$7.5m in exploration to gain up to 75% of the Joint Venture in the Musgrave Province with Woomera. Five tenements make up the Gawler Craton package (**Gawler Craton Project**) which are prospective for IOCGU deposits, Cu-Ni-Co deposits, RE and Precious Metals. Woomera's tenement portfolio also includes 8 granted tenements and two tenement applications including 3 tenements in the Pilbara region of WA (**Pilgangoora Lithium Project**), 2 lithium tenements near Ravensthorpe (**Mt Cattlin Lithium Project**) and several WA lithium brine prospects over Lakes Tay, Sharpe, Dundas, Cowan and Dumbleyung (**Lakes Lithium Project**).



Woomera Mining Limited

ELA 6090

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none">• <i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i>• <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>• <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i>• <i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of</i>	<ul style="list-style-type: none">• The Geological Survey of South Australia (GSSA) have completed significant work programs over tenure including, geological mapping, rock chip sampling, detailed gravity survey lines and RAB/RC drilling.• The GSSA also completed the Abminga bedrock drilling program which was initiated as part of the Targeted Exploration Initiative of South Australia (TEISA) strategy. Drilling was conducted on the easternmost Musgrave Block on the Tieyon and Ayres Range South pastoral leases, to the immediate east of the Anangu Pitjantjatjara (AP) Lands — a region with very little known geological information on the underlying basement rock. The aim of the program was to investigate the nature of the basement below shallow cover to produce comprehensive, accurate and relevant geoscientific data on the easternmost Musgrave Block. The program commenced in early May and was completed by early August 2001. The final program consisted of 140 RC air-core drill holes totalling 5,123 m with all but a few drill holes intersecting fresh basement. The program drilled through cover to target lithologies corresponding to various aeromagnetic signatures on the Alcurra, Tieyon and Treloar 1:100 000 map sheets.• No exploration work has been completed by any other parties

Criteria	JORC Code explanation	Commentary
	<i>detailed information.</i>	
<i>Drilling techniques</i>	<ul style="list-style-type: none"> • <i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i> 	<ul style="list-style-type: none"> • Historic RC air-core drilling by GSSA in 2001 generally spaced 2–5km along station tracks. • The results in this Report are historical and as such additional details are unknown.
<i>Drill sample recovery</i>	<ul style="list-style-type: none"> • <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> • <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> • <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i> 	<ul style="list-style-type: none"> • For the GSSA air-core drilling, samples representing one to two metre depth intervals were laid out in small hand dug pits at each site. Small samples of each interval were collected for storage at the PIRSA core library. Composite samples and representative end-of-hole sample intervals — generally of ‘basement’ rocks — were collected for petrological and geochemical analysis • No significant mineralisation was encountered in the GSSA drilling.
<i>Logging</i>	<ul style="list-style-type: none"> • <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> • <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> • <i>The total length and percentage of the relevant intersections logged.</i> 	<ul style="list-style-type: none"> • Samples were collected and qualitatively logged at one to two metre intervals for each drill hole. A representative sample was placed in a plastic jar and stored in core trays. The magnetic susceptibility of each sample segment was recorded using an Exploranium KT-9 Kappameter.
<i>Sub-sampling techniques and sample preparation</i>	<ul style="list-style-type: none"> • <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> • <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> • <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> • <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> • <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> 	<ul style="list-style-type: none"> • No coring has been completed. • For the GSSA drilling, a representative sample was placed in a plastic jar and stored in core trays. Only a small number of drill holes intersected water meaning most samples were dry. • There is no mention as to how the sample was deemed to be representative. • The results in this Report are historical and as such these details are unknown.

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> The GSSA report makes no mention of whether the sample sizes were appropriate for the material being sampled.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i> 	<ul style="list-style-type: none"> For the GSSA drilling, the drill holes were compositely sampled for geochemistry according to lithology across the whole depth of the hole. The maximum composite sample interval was 10 m. A grab sample was taken from each one to two metre sample of the composite interval and combined to form a 2-5 kilogram sample. Composite samples were sent to Amdel for analysis of the following suite of elements: <ul style="list-style-type: none"> Ca, Cr, Fe, K, Mg, Mn, Na, Ni, P, S, Sc, Ti, V, Sr (IC3E – mixed acid digest, measured by ICPOES). Ag, As, Bi, Cd, Co, Cs, Cu, Ga, In, Mo, Nb, Pb, Sb, Se, Te, Th, Tl, U, W, Zn, Y (IC3M – mixed acid digest, measurement by ICP-MS). Ce, La, Dy, Er, Eu, Gd, Ho, Lu, Nd, Pr, Sm, Tb, Tm, Yb (IC3R – mixed acid digest, measurement by ICP-MS). Au, Pt, Pd (FA3M – fused sample dissolved in aqua regia, measurement by graphite furnace AAS or ICP-MS). <p>Where recognisable basement was intersected in the final one to two metre sample (end-of-hole sample), additional geochemical analyses were undertaken and were sent to Amdel for the following elements and methods:</p> <ul style="list-style-type: none"> Al₂O₃, CaO, Fe₂O₃, K₂O, MgO, MnO, Na₂O, P₂O₅, SiO₂, S, TiO₂, Cr, Sc, V (IC4 – whole rock total fusion, measurement by ICP-OES). LOI (GRAV7 – measurement by weight loss). Ba, Be, Hf, Rb, Sn, Sr, Ta, Zr (IC4M – whole rock total fusion, measurement by ICP-MS). Ag, As, Bi, Cd, Co, Cs, Cu, Ga, In, Mo, Nb, Ni, Pb, Sb, Se, Te, Th, Tl, U, W, Zn, Y (IC3M – mixed acid digest measurement by ICP-MS). Ce, La, Dy, Er, Gd, Ho, Lu, Nd, Pr, Sm, Tb, Tm, Yb (IC3R – mixed acid digest, measurement by ICP-MS).

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> • Au, Pt, Pd (FA3M – fused sample dissolved in aqua regia, measurement by graphite furnace AAS or ICP-MS).
Verification of sampling and assaying	<ul style="list-style-type: none"> • The verification of significant intersections by either independent or alternative company personnel. • The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> • No significant intersections were reported in the GSSA drilling. • There was no mention of using twinned drill holes in the GSSA Report. • The results in this Report are historical and as such these details are unknown. • No adjustments were made to assays reported from the GSSA drilling.
Location of data points	<ul style="list-style-type: none"> • Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. • Specification of the grid system used. • Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> • The results in this Report are historical and as such these details are unknown.
Data spacing and distribution	<ul style="list-style-type: none"> • Data spacing for reporting of Exploration Results. • Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. • Whether sample compositing has been applied. 	<ul style="list-style-type: none"> • No mineralisation was encountered in the historic drilling.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. • If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> • No mineralisation was encountered in the historic drilling.
Sample security	<ul style="list-style-type: none"> • The measures taken to ensure sample security. 	<ul style="list-style-type: none"> • The results in this Report are historical and as such these details are unknown.

Criteria	JORC Code explanation	Commentary
<i>Audits or reviews</i>	<ul style="list-style-type: none"> <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> The results in this Report are historical and as such these details are unknown.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<ul style="list-style-type: none"> EL 6090 (Tieyon) formerly (ELA 2017/00139) was granted on 12 January 2018. EL 6090 is located approximately 230 km north-west of Oodnadatta. EL 6090 has a concurrent/overlapping Petroleum Exploration Licence Application PELA 332 (Tri-Star Energy Company). Native Title and Aboriginal Heritage determination include SCD2013/001 Tjajiwara Unmuru.
<i>Exploration done by other parties</i>	<ul style="list-style-type: none"> <i>Acknowledgment and appraisal of exploration by other parties.</i> 	<ul style="list-style-type: none"> The Geological Survey of South Australia (GSSA) have completed significant work programs over tenure including, geological mapping, rock chip sampling, detailed gravity survey lines and RAB/RC drilling. No exploration work has been completed by any other parties.
<i>Geology</i>	<ul style="list-style-type: none"> <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none"> WML is primarily exploring for magmatic Ni-Cu-Co-PGE massive sulphide deposits within Giles Complex intrusions, and younger mafic/ultramafic dyke swarms of the Musgrave Province, South Australia. WML are also assessing the potential for sediment hosted Cu-Pb-Zn within the Birksgate Complex metasediments and Ag-REE mineralisation within the Pitjantjatjara Supersuite granite.
<i>Drill hole Information</i>	<ul style="list-style-type: none"> <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> <i>easting and northing of the drill hole collar</i> 	<ul style="list-style-type: none"> No mineralisation was encountered in the historic drilling and therefore this information is not considered Material. The results in this Report are historical and as such these details are unknown.

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> ○ elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar ○ dip and azimuth of the hole ○ down hole length and interception depth ○ hole length. ● If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	
Data aggregation methods	<ul style="list-style-type: none"> ● In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. ● Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. ● The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> ● No mineralisation was encountered in the historic drilling and therefore this information is not considered Material. ● The results in this Report are historical and as such these details are unknown.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> ● These relationships are particularly important in the reporting of Exploration Results. ● If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. ● If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	<ul style="list-style-type: none"> ● No mineralisation was encountered in the historic drilling.
Diagrams	<ul style="list-style-type: none"> ● Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> ● No mineralisation was encountered in the historic drilling.

Criteria	JORC Code explanation	Commentary
<i>Balanced reporting</i>	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> No mineralisation was encountered in the historic drilling.
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> No other exploration is being reported.
<i>Further work</i>	<ul style="list-style-type: none"> The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> Planned exploration includes; <ul style="list-style-type: none"> Heritage and vegetation clearance. Drill 125 x shallow auger/aircore drill holes across interpreted mafic/ultramafic intrusives with focus on known sulphide bearing margins. Follow-up ground electromagnetics (EM). Follow-up RC/Diamond drilling if high priority targets identified. Follow-up study including petrological assessment of identified Ag-REE mineralisation to determine potential for an economic occurrence. Follow-up study to assess potential for metasediment hosted Cu-Pb-Zn.

EL 6091

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> The Geological Survey of South Australia (GSSA) has completed significant work programs over tenure including, geological mapping, rock chip sampling, detailed gravity survey lines. The GSSA also completed the Abminga bedrock drilling program which was initiated as part of the Targeted Exploration Initiative of South Australia (TEISA) strategy. Drilling was conducted on the easternmost Musgrave Block on the Tieyon and Ayres Range South pastoral leases, to the immediate east of the Anangu Pitjantjatjara (AP) Lands — a region with very little known geological information on the underlying basement rock. The aim of the program was to investigate the nature of the basement below shallow cover to produce comprehensive, accurate and relevant geoscientific data on the easternmost Musgrave Block. The program commenced in early May and was completed by early August 2001. The final program consisted of 140 RC air-core drill holes totalling 5,123 m with all but a few drill holes intersecting fresh basement. The program drilled through cover to target lithologies corresponding to various aeromagnetic signatures on the Alcurra, Tieyon and Treloar 1:100 000 map sheets. Previous AC drilling (40 holes) was completed by Rio Tinto (RIO) over tenure. Previous surface geochemistry completed by Mithril Resources (MTH) over tenure. The results in this Report are historical and as such additional details are unknown.
Drilling techniques	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> Historic RC air-core drilling by GSSA in 2001 generally spaced 2–5km along station tracks. Historic drilling includes 40 AC holes by Rio Tinto. The results in this Report are historical and as such additional details are unknown.

Criteria	JORC Code explanation	Commentary
<i>Drill sample recovery</i>	<ul style="list-style-type: none"> • <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> • <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> • <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i> 	<ul style="list-style-type: none"> • For the GSSA air-core drilling, samples representing one to two metre depth intervals were laid out in small hand dug pits at each site. Small samples of each interval were collected for storage at the PIRSA core library. Composite samples and representative end-of-hole sample intervals — generally of ‘basement’ rocks — were collected for petrological and geochemical analysis. • No significant mineralisation was encountered in the GSSA drilling.
<i>Logging</i>	<ul style="list-style-type: none"> • <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> • <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> • <i>The total length and percentage of the relevant intersections logged.</i> 	<ul style="list-style-type: none"> • Samples were collected and qualitatively logged at one to two metre intervals for each drill hole. A representative sample was placed in a plastic jar and stored in core trays. The magnetic susceptibility of each sample segment was recorded using an Exploranium KT-9 Kappameter. • The results in this Report are historical and as such these details are unknown
<i>Sub-sampling techniques and sample preparation</i>	<ul style="list-style-type: none"> • <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> • <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> • <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> • <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> • <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> • <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> • No coring has been completed. • For the GSSA drilling, a representative sample was placed in a plastic jar and stored in core trays. • There is no mention as to how the sample was deemed to be representative. • The results in this Report are historical and as such these details are unknown
<i>Quality of assay data and</i>	<ul style="list-style-type: none"> • <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> • <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining</i> 	<ul style="list-style-type: none"> • For the GSSA drilling, the drill holes were compositely sampled for geochemistry according to lithology across the whole depth of the hole. The maximum composite sample interval was 10 m. A grab sample was taken from each one to two metre sample of the composite interval and combined to form a 2-5 kilogram sample. Composite samples were sent to Amdel for analysis of the following

Criteria	JORC Code explanation	Commentary
laboratory tests	<p><i>the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></p> <ul style="list-style-type: none"> <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i> 	<p>suite of elements:</p> <ul style="list-style-type: none"> Ca, Cr, Fe, K, Mg, Mn, Na, Ni, P, S, Sc, Ti, V, Sr (IC3E – mixed acid digest, measured by ICPOES). Ag, As, Bi, Cd, Co, Cs, Cu, Ga, In, Mo, Nb, Pb, Sb, Se, Te, Th, Tl, U, W, Zn, Y (IC3M – mixed acid digest, measurement by ICP-MS). Ce, La, Dy, Er, Eu, Gd, Ho, Lu, Nd, Pr, Sm, Tb, Tm, Yb (IC3R – mixed acid digest, measurement by ICP-MS). Au, Pt, Pd (FA3M – fused sample dissolved in aqua regia, measurement by graphite furnace AAS or ICP-MS). <p>Where recognisable basement was intersected in the final one to two metre sample (end-of-hole sample), additional geochemical analyses were undertaken and were sent to Amdel for the following elements and methods:</p> <ul style="list-style-type: none"> Al₂O₃, CaO, Fe₂O₃, K₂O, MgO, MnO, Na₂O, P₂O₅, SiO₂, S, TiO₂, Cr, Sc, V (IC4 – whole rock total fusion, measurement by ICP-OES). LOI (GRAV7 – measurement by weight loss). Ba, Be, Hf, Rb, Sn, Sr, Ta, Zr (IC4M – whole rock total fusion, measurement by ICP-MS). Ag, As, Bi, Cd, Co, Cs, Cu, Ga, In, Mo, Nb, Ni, Pb, Sb, Se, Te, Th, Tl, U, W, Zn, Y (IC3M – mixed acid digest measurement by ICP-MS). Ce, La, Dy, Er, Gd, Ho, Lu, Nd, Pr, Sm, Tb, Tm, Yb (IC3R – mixed acid digest, measurement by ICP-MS). Au, Pt, Pd (FA3M – fused sample dissolved in aqua regia, measurement by graphite furnace AAS or ICP-MS).
Verification of sampling and assaying	<ul style="list-style-type: none"> <i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i> 	<ul style="list-style-type: none"> No significant intersections were reported in the GSSA drilling. There was no mention of using twinned drill holes in the GSSA Report. The results in this Report are historical and as such these details are unknown. No adjustments were made to assays reported from the GSSA drilling.

Criteria	JORC Code explanation	Commentary
<i>Location of data points</i>	<ul style="list-style-type: none"> • <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> • <i>Specification of the grid system used.</i> • <i>Quality and adequacy of topographic control.</i> 	<ul style="list-style-type: none"> • The results in this Report are historical and as such these details are unknown.
<i>Data spacing and distribution</i>	<ul style="list-style-type: none"> • <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> • No mineralisation was encountered in the historic drilling.
<i>Orientation of data in relation to geological structure</i>	<ul style="list-style-type: none"> • <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<ul style="list-style-type: none"> • No mineralisation was encountered in the historic drilling.
<i>Sample security</i>	<ul style="list-style-type: none"> • <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> • The results in this Report are historical and as such these details are unknown.
<i>Audits or reviews</i>	<ul style="list-style-type: none"> • <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> • The results in this Report are historical and as such these details are unknown.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and</i>	<ul style="list-style-type: none"> • <i>Type, reference name/number, location and ownership including agreements or material issues</i> 	<ul style="list-style-type: none"> • ELA 6091 Sundown Outstations (formerly EL 5041) was granted on 11 October 2017.

Criteria	JORC Code explanation	Commentary
<i>land tenure status</i>	<p><i>with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i></p> <ul style="list-style-type: none"> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<ul style="list-style-type: none"> EL 6091 is located approximately 130 km north-north-west of Marla. EL 6091 has a concurrent/overlapping Petroleum Exploration Licence Application PELA 332 (Tri-Star Energy Company). Native Title and Aboriginal Heritage determinations include SCD2013/001 Tjajiwara Unmuru. Native Title and Aboriginal Heritage compensation applications include SP2015/001 Tjajiwara Unmuru Compensation Application. Aboriginal Heritage Sites include one registered cultural site.
<i>Exploration done by other parties</i>	<ul style="list-style-type: none"> <i>Acknowledgment and appraisal of exploration by other parties.</i> 	<ul style="list-style-type: none"> The Geological Survey of South Australia (GSSA) have completed significant work programs over tenure including, geological mapping, rock chip sampling, detailed gravity survey lines and wide spaced RC air-core drilling. Previous AC drilling completed by Rio Tinto (RIO) over tenure (40 holes). Previous surface geochemistry completed by Mithril Resources (MTH) over tenure.
<i>Geology</i>	<ul style="list-style-type: none"> <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none"> WML is primarily exploring for magmatic Ni-Cu-Co-PGE massive sulphide deposits associated with Giles Complex intrusions, and younger mafic/ultramafic dyke swarms of the Musgrave Province, South Australia. WML are also assessing the potential for sediment hosted Cu-Pb-Zn within the Birksgate Complex metasediments.
<i>Drill hole Information</i>	<ul style="list-style-type: none"> <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> <i>easting and northing of the drill hole collar</i> <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth</i> <i>hole length.</i> <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	<ul style="list-style-type: none"> No mineralisation was encountered in the historic drilling and therefore this information is not considered Material. The results in this Report are historical and as such these details are unknown.

Criteria	JORC Code explanation	Commentary
<i>Data aggregation methods</i>	<ul style="list-style-type: none"> <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<ul style="list-style-type: none"> No mineralisation was encountered in the historic drilling and therefore this information is not considered Material. The results in this Report are historical and as such these details are unknown.
<i>Relationship between mineralisation widths and intercept lengths</i>	<ul style="list-style-type: none"> <i>These relationships are particularly important in the reporting of Exploration Results.</i> <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i> 	<ul style="list-style-type: none"> No mineralisation was encountered in the historic drilling.
<i>Diagrams</i>	<ul style="list-style-type: none"> <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> No mineralisation was encountered in the historic drilling.
<i>Balanced reporting</i>	<ul style="list-style-type: none"> <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> No mineralisation was encountered in the historic drilling.
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating</i> 	<ul style="list-style-type: none"> No other exploration is being reported.

Criteria	JORC Code explanation	Commentary
	<i>substances.</i>	
<i>Further work</i>	<ul style="list-style-type: none"><i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i><i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	<ul style="list-style-type: none">Planned exploration includes;<ul style="list-style-type: none">Heritage and vegetation clearance.Drill 125 x shallow auger/aircore drill holes across interpreted mafic/ultramafic intrusives with focus on known sulphide bearing margins.Follow-up ground electromagnetics (EM).Follow-up RC/Diamond drilling if high priority targets identified.Follow-up study to assess potential for metasediment hosted Cu-Pb-Zn.

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> <i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i> 	<ul style="list-style-type: none"> The Geological Survey of South Australia (GSSA) have completed significant work programs over tenure including, geological mapping, rock chip sampling, detailed gravity survey lines and RAB/RC drilling. Drill hole TIE RC 89 intersected ultramafic intrusive rocks from 6m. The GSSA also completed the Abminga bedrock drilling program which was initiated as part of the Targeted Exploration Initiative of South Australia (TEISA) strategy. Drilling was conducted on the easternmost Musgrave Block on the Tieyon and Ayres Range South pastoral leases, to the immediate east of the Anangu Pitjantjatjara (AP) Lands — a region with very little known geological information on the underlying basement rock. The aim of the program was to investigate the nature of the basement below shallow cover to produce comprehensive, accurate and relevant geoscientific data on the easternmost Musgrave Block. The program commenced in early May and was completed by early August 2001. The final program consisted of 140 RC air-core drill holes totalling 5,123 m with all but a few drill holes intersecting fresh basement. The program drilled through cover to target lithologies corresponding to various aeromagnetic signatures on the Alcurra, Tieyon and Treloar 1:100 000 map sheets. A detailed aeromagnetic and radiometric survey (1994) and one AC drill hole (AC95MH 1, 1995) was completed by Rio Tinto (RIO) over tenure. Peak Ni values include 2200ppm from 16-18m and 1500ppm from 26-27m. Previous surface geochemistry completed by Mithril Resources (MTH) over tenure. CRAE completed trial Airborne EM and Ground EM lines.
Drilling techniques	<ul style="list-style-type: none"> <i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i> 	<ul style="list-style-type: none"> Historic RC air-core drilling by GSSA in 2001 generally spaced 2–5km along station tracks. Historic drilling includes 1 AC holes by Rio Tinto and GSSA RAB/RC drilling. The results in this Report are historical and as such additional details are unknown.

Criteria	JORC Code explanation	Commentary
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> For the GSSA air-core drilling, samples representing one to two metre depth intervals were laid out in small hand dug pits at each site. Small samples of each interval were collected for storage at the PIRSA core library. Composite samples and representative end-of-hole sample intervals — generally of ‘basement’ rocks — were collected for petrological and geochemical analysis. No significant mineralisation was encountered in the GSSA drilling.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> Samples were collected and qualitatively logged at one to two metre intervals for each drill hole. A representative sample was placed in a plastic jar and stored in core trays. The magnetic susceptibility of each sample segment was recorded using an Exploranium KT-9 Kappameter.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> No coring has been completed. For the GSSA drilling, a representative sample was placed in a plastic jar and stored in core trays. Only a small number of drill holes intersected water meaning most samples were dry. There is no mention as to how the sample was deemed to be representative. The results in this Report are historical and as such these details are unknown. The GSSA report makes no mention of whether the sample sizes were appropriate for the material being sampled.
Quality of assay data	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and 	<ul style="list-style-type: none"> For the GSSA drilling, the drill holes were compositely sampled for geochemistry according to lithology across the whole depth of the hole. The maximum

Criteria	JORC Code explanation	Commentary
<i>and laboratory tests</i>	<p><i>whether the technique is considered partial or total.</i></p> <ul style="list-style-type: none"> <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i> 	<p>composite sample interval was 10 m. A grab sample was taken from each one to two metre sample of the composite interval and combined to form a 2-5 kilogram sample. Composite samples were sent to Amdel for analysis of the following suite of elements:</p> <ul style="list-style-type: none"> Ca, Cr, Fe, K, Mg, Mn, Na, Ni, P, S, Sc, Ti, V, Sr (IC3E – mixed acid digest, measured by ICPOES). Ag, As, Bi, Cd, Co, Cs, Cu, Ga, In, Mo, Nb, Pb, Sb, Se, Te, Th, Tl, U, W, Zn, Y (IC3M – mixed acid digest, measurement by ICP-MS). Ce, La, Dy, Er, Eu, Gd, Ho, Lu, Nd, Pr, Sm, Tb, Tm, Yb (IC3R – mixed acid digest, measurement by ICP-MS). Au, Pt, Pd (FA3M – fused sample dissolved in aqua regia, measurement by graphite furnace AAS or ICP-MS). <p>Where recognisable basement was intersected in the final one to two metre sample (end-of-hole sample), additional geochemical analyses were undertaken and were sent to Amdel for the following elements and methods:</p> <ul style="list-style-type: none"> Al₂O₃, CaO, Fe₂O₃, K₂O, MgO, MnO, Na₂O, P₂O₅, SiO₂, S, TiO₂, Cr, Sc, V (IC4 – whole rock total fusion, measurement by ICP-OES). LOI (GRAV7 – measurement by weight loss). Ba, Be, Hf, Rb, Sn, Sr, Ta, Zr (IC4M – whole rock total fusion, measurement by ICP-MS). Ag, As, Bi, Cd, Co, Cs, Cu, Ga, In, Mo, Nb, Ni, Pb, Sb, Se, Te, Th, Tl, U, W, Zn, Y (IC3M – mixed acid digest measurement by ICP-MS). Ce, La, Dy, Er, Gd, Ho, Lu, Nd, Pr, Sm, Tb, Tm, Yb (IC3R – mixed acid digest, measurement by ICP-MS). Au, Pt, Pd (FA3M – fused sample dissolved in aqua regia, measurement by graphite furnace AAS or ICP-MS).
<i>Verification of sampling and assaying</i>	<ul style="list-style-type: none"> <i>The verification of significant intersections by either independent or alternative company personnel.</i> <i>The use of twinned holes.</i> <i>Documentation of primary data, data entry procedures, data verification, data storage (physical</i> 	<ul style="list-style-type: none"> No significant intersections were reported in the GSSA drilling. There was no mention of using twinned drill holes in the GSSA Report.

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> <i>and electronic) protocols.</i> <i>Discuss any adjustment to assay data.</i> 	<ul style="list-style-type: none"> The results in this Report are historical and as such these details are unknown. No adjustments were made to assays reported from the GSSA drilling.
<i>Location of data points</i>	<ul style="list-style-type: none"> <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> <i>Specification of the grid system used.</i> <i>Quality and adequacy of topographic control.</i> 	<ul style="list-style-type: none"> The results in this Report are historical and as such these details are unknown.
<i>Data spacing and distribution</i>	<ul style="list-style-type: none"> <i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> No mineralisation was encountered in the historic drilling.
<i>Orientation of data in relation to geological structure</i>	<ul style="list-style-type: none"> <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<ul style="list-style-type: none"> No mineralisation was encountered in the historic drilling.
<i>Sample security</i>	<ul style="list-style-type: none"> <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> The results in this Report are historical and as such these details are unknown.
<i>Audits or reviews</i>	<ul style="list-style-type: none"> <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> The results in this Report are historical and as such these details are unknown.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<ul style="list-style-type: none"> EL 6092 Mount Howe (formerly EL 5042) was granted on 11 October 2017. EL 6092 is located approximately 130 km north of Marla. EL 6092 has a concurrent/overlapping Petroleum Exploration Licence Application PELA 332 (Tri-Star Energy Company). Native Title and Aboriginal Heritage determinations include SCD2013/001 Tjayiwara Unmuru. Aboriginal Heritage Sites include one registered cultural site and one registered archaeological site.
<i>Exploration done by other parties</i>	<ul style="list-style-type: none"> <i>Acknowledgment and appraisal of exploration by other parties.</i> 	<ul style="list-style-type: none"> The Geological Survey of South Australia (GSSA) has completed significant work programs over tenure including, geological mapping, rock chip sampling, detailed gravity survey lines and RAB/RC drilling. Drill hole TIE RC 89 intersected ultramafic intrusive rocks from 6m. A detailed aeromagnetic and radiometric survey (1994) and one AC drill hole (AC95MH 1, 1995) was completed by Rio Tinto (RIO) over tenure. Peak Ni values include 2200ppm from 16-18m and 1500ppm from 26-27m. Previous surface geochemistry completed by Mithril Resources (MTH) over tenure.
<i>Geology</i>	<ul style="list-style-type: none"> <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none"> WML is primarily exploring for magmatic Ni-Cu-Co-PGE massive sulphide deposits within Giles Complex intrusions, and younger mafic/ultramafic dyke swarms of the Musgrave Province, South Australia. WML are also assessing the potential for sediment hosted Cu-Pb-Zn within the Birksgate Complex metasediments.
<i>Drill hole Information</i>	<ul style="list-style-type: none"> <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> <i>easting and northing of the drill hole collar</i> <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth</i> 	<ul style="list-style-type: none"> No mineralisation was encountered in the historic drilling and therefore this information is not considered Material. The results in this Report are historical and as such these details are unknown.

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> ○ hole length. • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	
Data aggregation methods	<ul style="list-style-type: none"> • In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> • No mineralisation was encountered in the historic drilling and therefore this information is not considered Material. • The results in this Report are historical and as such these details are unknown.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> • These relationships are particularly important in the reporting of Exploration Results. • If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. • If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	<ul style="list-style-type: none"> • No mineralisation was encountered in the historic drilling
Diagrams	<ul style="list-style-type: none"> • Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> • No mineralisation was encountered in the historic drilling
Balanced reporting	<ul style="list-style-type: none"> • Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> • No mineralisation was encountered in the historic drilling

Criteria	JORC Code explanation	Commentary
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<ul style="list-style-type: none"> 3D magnetic inversion models were completed by WML, using historic geophysical data. The models indicate the presence of remanently magnetised mafic /ultramafic bodies (Cavanagh anomaly, Area#3 and Area#7).
<i>Further work</i>	<ul style="list-style-type: none"> <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> Planned exploration includes; <ul style="list-style-type: none"> Heritage and vegetation clearance. Drill 125 x shallow auger/aircore drill holes across interpreted mafic/ultramafic intrusives with focus on known sulphide bearing margins. Follow-up ground electromagnetics (EM). Follow-up RC/Diamond drilling if high priority targets identified. Follow-up study to assess potential for metasediment hosted Cu-Pb-Zn.

EL 6180

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> The Geological Survey of South Australia (GSSA) has completed significant work programs over tenure including, geological mapping, rock chip sampling, detailed gravity survey lines. The GSSA also completed the Abminga bedrock drilling program which was initiated as part of the Targeted Exploration Initiative of South Australia (TEISA) strategy. Drilling was conducted on the easternmost Musgrave Block on the Tieyon and Ayres Range South pastoral leases, to the immediate east of the Anangu Pitjantjatjara (AP) Lands — a region with very little known geological information on the underlying basement rock. The aim of the program was to investigate the nature of the basement below shallow cover to produce comprehensive, accurate and relevant geoscientific data on the easternmost Musgrave Block. The program commenced in early May and was completed by early August 2001. The final program consisted of 140 RC air-core drill holes totalling 5,123 m with all but a few drill holes intersecting fresh basement. The program drilled through cover to target lithologies corresponding to various aeromagnetic signatures on the Alcurra, Tieyon and Treloar 1:100 000 map sheets.
Drilling techniques	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> Historic RC air-core drilling by GSSA in 2001 generally spaced 2–5km along station tracks. The results in this Report are historical and as such additional details are unknown.
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and 	<ul style="list-style-type: none"> For the GSSA air-core drilling, samples representing one to two metre depth intervals were laid out in small hand dug pits at each site. Small samples of each interval were collected for storage at the PIRSA core library. Composite samples and representative end-of-

	<p><i>grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></p>	<p>hole sample intervals — generally of ‘basement’ rocks — were collected for petrological and geochemical analysis.</p> <ul style="list-style-type: none"> • No significant mineralisation was encountered in the GSSA drilling.
Logging	<ul style="list-style-type: none"> • <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> • <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> • <i>The total length and percentage of the relevant intersections logged.</i> 	<ul style="list-style-type: none"> • Samples were collected and qualitatively logged at one to two metre intervals for each drill hole. A representative sample was placed in a plastic jar and stored in core trays. The magnetic susceptibility of each sample segment was recorded using an Exploranium KT-9 Kappameter. • The results in this Report are historical and as such these details are unknown
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> • <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> • <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> • <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> • <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> • <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> • <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> • No coring has been completed. • For the GSSA drilling, a representative sample was placed in a plastic jar and stored in core trays. • There is no mention as to how the sample was deemed to be representative. • The results in this Report are historical and as such these details are unknown
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> • <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> • <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> • <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i> 	<ul style="list-style-type: none"> • For the GSSA drilling, the drill holes were compositely sampled for geochemistry according to lithology across the whole depth of the hole. The maximum composite sample interval was 10 m. A grab sample was taken from each one to two metre sample of the composite interval and combined to form a 2-5 kilogram sample. Composite samples were sent to Amdel for analysis of the following suite of elements: <ul style="list-style-type: none"> • Ca, Cr, Fe, K, Mg, Mn, Na, Ni, P, S, Sc, Ti, V, Sr (IC3E – mixed acid digest, measured by ICPOES). • Ag, As, Bi, Cd, Co, Cs, Cu, Ga, In, Mo, Nb, Pb, Sb, Se, Te, Th, Tl, U, W, Zn, Y (IC3M – mixed acid digest, measurement by ICP-MS). • Ce, La, Dy, Er, Eu, Gd, Ho, Lu, Nd, Pr, Sm, Tb, Tm, Yb (IC3R – mixed acid digest, measurement by ICP-MS).

		<ul style="list-style-type: none"> • Au, Pt, Pd (FA3M – fused sample dissolved in aqua regia, measurement by graphite furnace AAS or ICP-MS). <p>Where recognisable basement was intersected in the final one to two metre sample (end-of-hole sample), additional geochemical analyses were undertaken and were sent to Amdel for the following elements and methods:</p> <ul style="list-style-type: none"> • Al₂O₃, CaO, Fe₂O₃, K₂O, MgO, MnO, Na₂O, P₂O₅, SiO₂, S, TiO₂, Cr, Sc, V (IC4 – whole rock total fusion, measurement by ICP-OES). • LOI (GRAV7 – measurement by weight loss). • Ba, Be, Hf, Rb, Sn, Sr, Ta, Zr (IC4M – whole rock total fusion, measurement by ICP-MS). • Ag, As, Bi, Cd, Co, Cs, Cu, Ga, In, Mo, Nb, Ni, Pb, Sb, Se, Te, Th, Tl, U, W, Zn, Y (IC3M – mixed acid digest measurement by ICP-MS). • Ce, La, Dy, Er, Gd, Ho, Lu, Nd, Pr, Sm, Tb, Tm, Yb (IC3R – mixed acid digest, measurement by ICP-MS). • Au, Pt, Pd (FA3M – fused sample dissolved in aqua regia, measurement by graphite furnace AAS or ICP-MS).
Verification of sampling and assaying	<ul style="list-style-type: none"> • The verification of significant intersections by either independent or alternative company personnel. • The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> • No significant intersections were reported in the GSSA drilling. • There was no mention of using twinned drill holes in the GSSA Report. • The results in this Report are historical and as such these details are unknown. • No adjustments were made to assays reported from the GSSA drilling.
Location of data points	<ul style="list-style-type: none"> • Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. • Specification of the grid system used. 	<ul style="list-style-type: none"> • The results in this Report are historical and as such these details are unknown.

	<ul style="list-style-type: none"> • <i>Quality and adequacy of topographic control.</i> 	
<i>Data spacing and distribution</i>	<ul style="list-style-type: none"> • <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> • No mineralisation was encountered in the historic drilling.
<i>Orientation of data in relation to geological structure</i>	<ul style="list-style-type: none"> • <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<ul style="list-style-type: none"> • No mineralisation was encountered in the historic drilling.
<i>Sample security</i>	<ul style="list-style-type: none"> • <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> • The results in this Report are historical and as such these details are unknown.
<i>Audits or reviews</i>	<ul style="list-style-type: none"> • <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> • The results in this Report are historical and as such these details are unknown.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> • <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> • <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<ul style="list-style-type: none"> • EL6180 (Mt Irwin) (formerly EL 5287) was granted on 25 June 2018. • EL 6180 is located approximately 105 km north-north-west of Marla. • EL 6180 has a concurrent/overlapping Petroleum Exploration Licence Application PELA 332 (Tri-Star Energy Company). • Native Title and Aboriginal Heritage determinations include SCD2011/003 Eringa and SCD2013/001 Tjaiuwara Unmuru. • Native Title and Aboriginal Heritage compensation applications include SP2015/001 Tjayuwara Unmuru Compensation Application.

Criteria	JORC Code explanation	Commentary
<i>Exploration done by other parties</i>	<ul style="list-style-type: none"> <i>Acknowledgment and appraisal of exploration by other parties.</i> 	<ul style="list-style-type: none"> The Geological Survey of South Australia (GSSA) have completed significant work programs over tenure including, geological mapping, rock chip sampling, detailed gravity survey lines and wide spaced RC air-core drilling. No exploration has been completed by any other parties.
<i>Geology</i>	<ul style="list-style-type: none"> <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none"> WML is primarily exploring for magmatic Ni-Cu-Co-PGE massive sulphide deposits associated with Giles Complex intrusions, and younger mafic/ultramafic dyke swarms of the Musgrave Province, South Australia. WML are also assessing the potential for sediment hosted Cu-Pb-Zn within the Birksgate Complex metasediments.
<i>Drill hole Information</i>	<ul style="list-style-type: none"> <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> <i>easting and northing of the drill hole collar</i> <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth</i> <i>hole length.</i> <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	<ul style="list-style-type: none"> No mineralisation was encountered in the historic drilling and therefore this information is not considered Material. The results in this Report are historical and as such these details are unknown.
<i>Data aggregation methods</i>	<ul style="list-style-type: none"> <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<ul style="list-style-type: none"> No mineralisation was encountered in the historic drilling and therefore this information is not considered Material. The results in this Report are historical and as such these details are unknown.

Criteria	JORC Code explanation	Commentary
<i>Relationship between mineralisation widths and intercept lengths</i>	<ul style="list-style-type: none"> • <i>These relationships are particularly important in the reporting of Exploration Results.</i> • <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> • <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i> 	<ul style="list-style-type: none"> • No mineralisation was encountered in the historic drilling.
<i>Diagrams</i>	<ul style="list-style-type: none"> • <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> • No mineralisation was encountered in the historic drilling.
<i>Balanced reporting</i>	<ul style="list-style-type: none"> • <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> • No mineralisation was encountered in the historic drilling.
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> • <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<ul style="list-style-type: none"> • No other exploration is being reported.
<i>Further work</i>	<ul style="list-style-type: none"> • <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> • <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> • Planned exploration includes; • Heritage and vegetation clearance. • Conduct Moving Loop Electromagnetic Survey (MLEM) • Follow-up RC/Diamond drilling if high priority targets identified. • Follow-up study to assess potential for metasediment hosted Cu-Pb-Zn.