

18 August 2022

DRILLING RESULTS – BINDI COPPER DEPOSIT

Demonstrates starter pit mineralisation continuity with areas of higher grade

Highlights

- Assay results received for diamond drill holes 22CADD001-004 at the Bindi Deposit demonstrate potential for starter pit mineralisation to be at better grades than current estimates included in Ore Reserve
- Diamond core holes targeted Ore Reserves within the planned starter pits in the West Limb, Bindi Hinge and East Limb as recently reported in the Pre-Feasibility Study (PFS) on 12 July 2022
- Drilling results correlate with the starter pit positions and further demonstrate similar or higher-grade shallow mineralisation
- Core samples will be used for metallurgical test work to be conducted as part of the Definitive Feasibility Study as well as provide increased confidence for an updated resource estimate planned for early 2023
- Results include:
 - 54m grading 0.32% Cu from 94m (22CADD001)
 - 38m grading 0.32% Cu from 54m (22CADD002)
 - **20m grading 0.59% Cu** from 104m including **14m grading 0.74% Cu** from 110m (22CADD002)
 - 40m grading 0.39% Cu from 48m (22CADD003)
 - 98m grading 0.27% Cu from 94m including **12m grading 0.51% Cu** from 98m (22CADD003)
 - **74m grading 0.60% Cu** from 44m (22CADD004)
 - 72m grading 0.24% Cu from 124m (22CADD004)

Drilling Results

Bindi – Metallurgical Core Drilling

Assay results have been received for four diamond core holes (22CADD001-004) completed within the proposed Bindi starter pits to provide material for metallurgical testing. Hole 22CADD001 targeted the Bindi Hinge where it transitions into the West Limb, hole 22CADD002 targeted the West Limb, hole 22CADD003 was completed into the East Limb and hole 22CADD004 tested the Bindi Hinge.

All the diamond core holes intersected good mineralisation in the target zones confirming the continuity and tenor of mineralisation within the Ore Reserve reported as part of the Caravel Copper Project Pre-Feasibility Study (refer ASX Announcement 12 July 2022). Hole 22CADD002 intersected a significant dolerite in the lower half which has stoped out the mineralisation in that area. The subvertical dolerite can be seen to trend northwest in the airborne magnetic imagery. Supergene mineralisation seen in holes 22CARC008 and 22CARC023 (refer ASX Announcement of 3 May 2022 and ASX Announcement of 19 May 2022) was not seen in 22CADD002 on the same section, suggesting there has been little lateral movement of copper within the weathering profile in this area.

Hole 22CADD004 intersected strong mineralisation through the nose of the Bindi Hinge, this correlates well with higher grade mineralisation seen in the broad intersection in hole 21CARC118.

Collar locations for all holes reported are detailed in Appendix 1 and illustrated in Figure 1. The downhole extent of mineralisation is illustrated on schematic cross sections in Figure 2-5.

Mineralised intersections for the reported drill holes are detailed in Appendix 2.

An additional seven diamond core holes (22CADD005-011) have been completed to provide geotechnical data to assist Definitive Feasibility Study design work of the Bindi Deposit starter pits and mine infrastructure. Assay results are awaited for all of these holes.

CARAVEL COPPER PROJECT

Bindi Deposit

Drill hole collar locations and Pit design

LEGEND

- 2020/21/22 Diamond drill hole collar
- 2020/21/22 RC drill hole collar
- Previous drill hole collar
- ▭ Surface trace of mineralised zone
- ▭ PFS Starter Pit
- ▭ Ore Reserve Pit
- ▭ PFS Pit

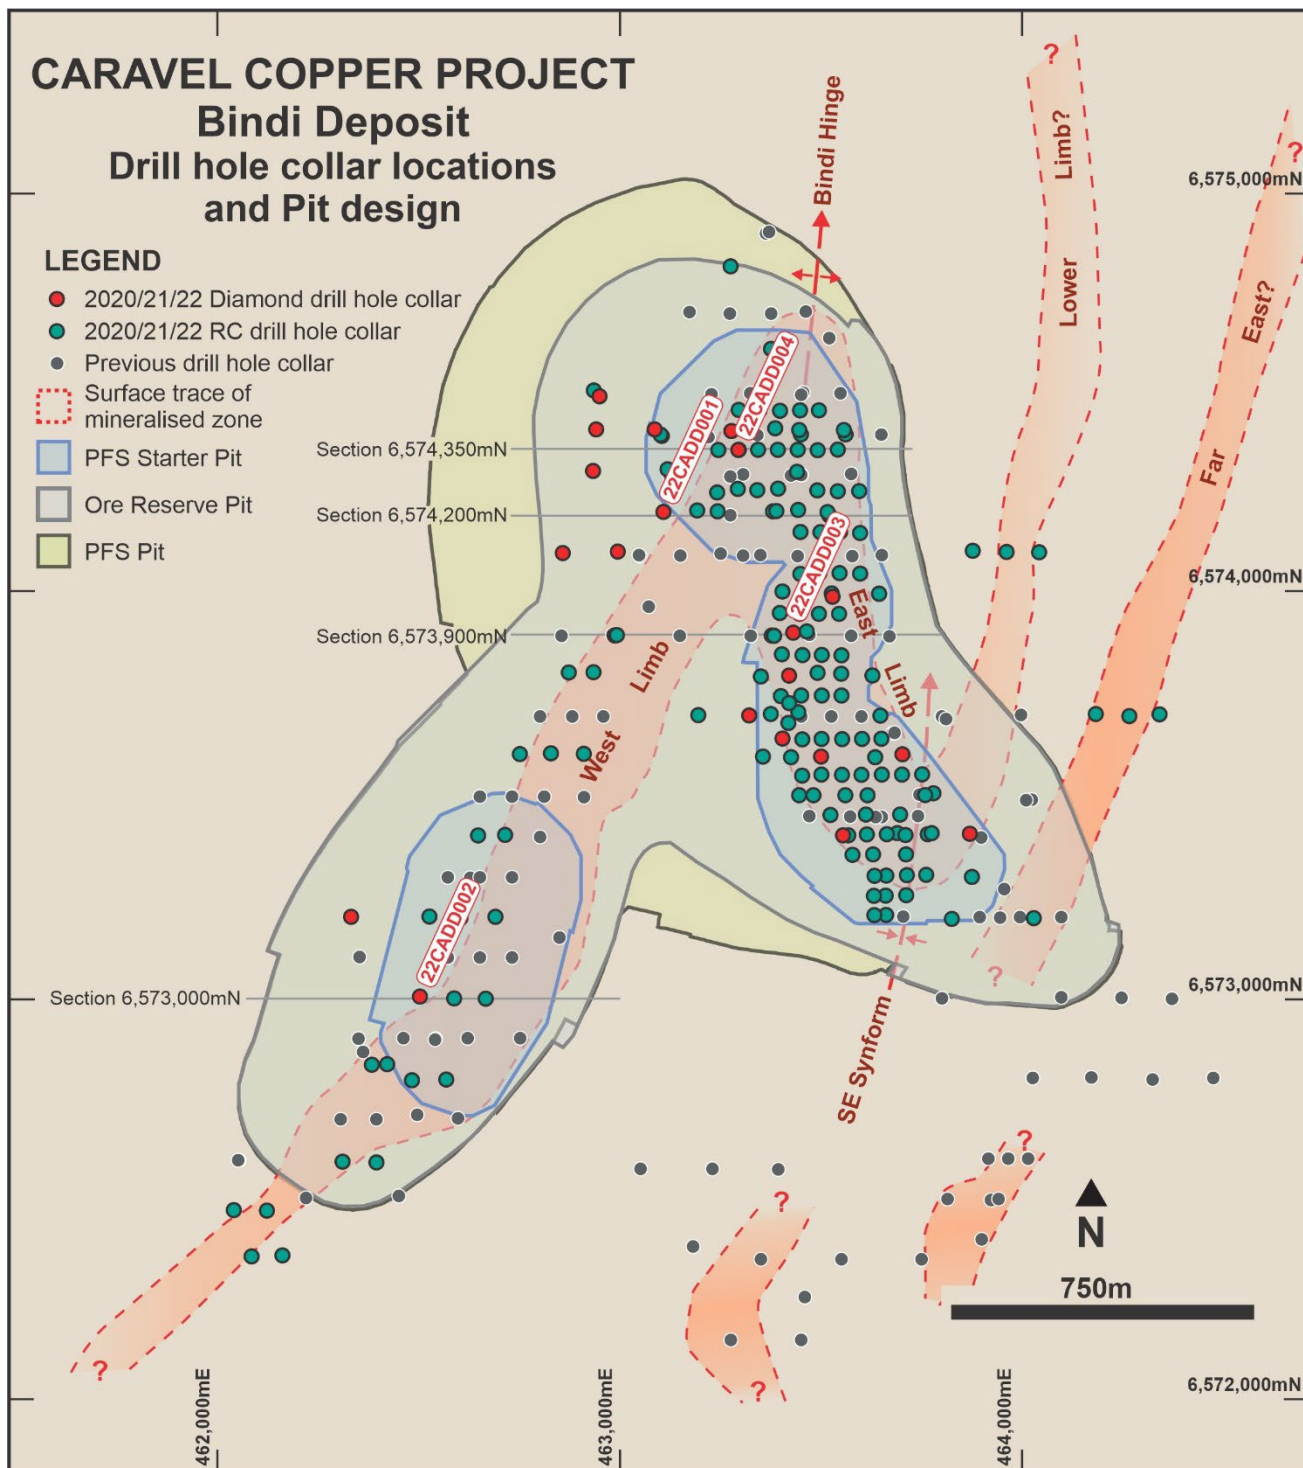


Figure 1: Drilling status plan of the Bindi copper deposit showing the locations of the reported diamond core drill holes. Drill holes from the 2021/22 program, previous drill collars, simplified geology and the 2022 PFS optimised pits are shown for reference.

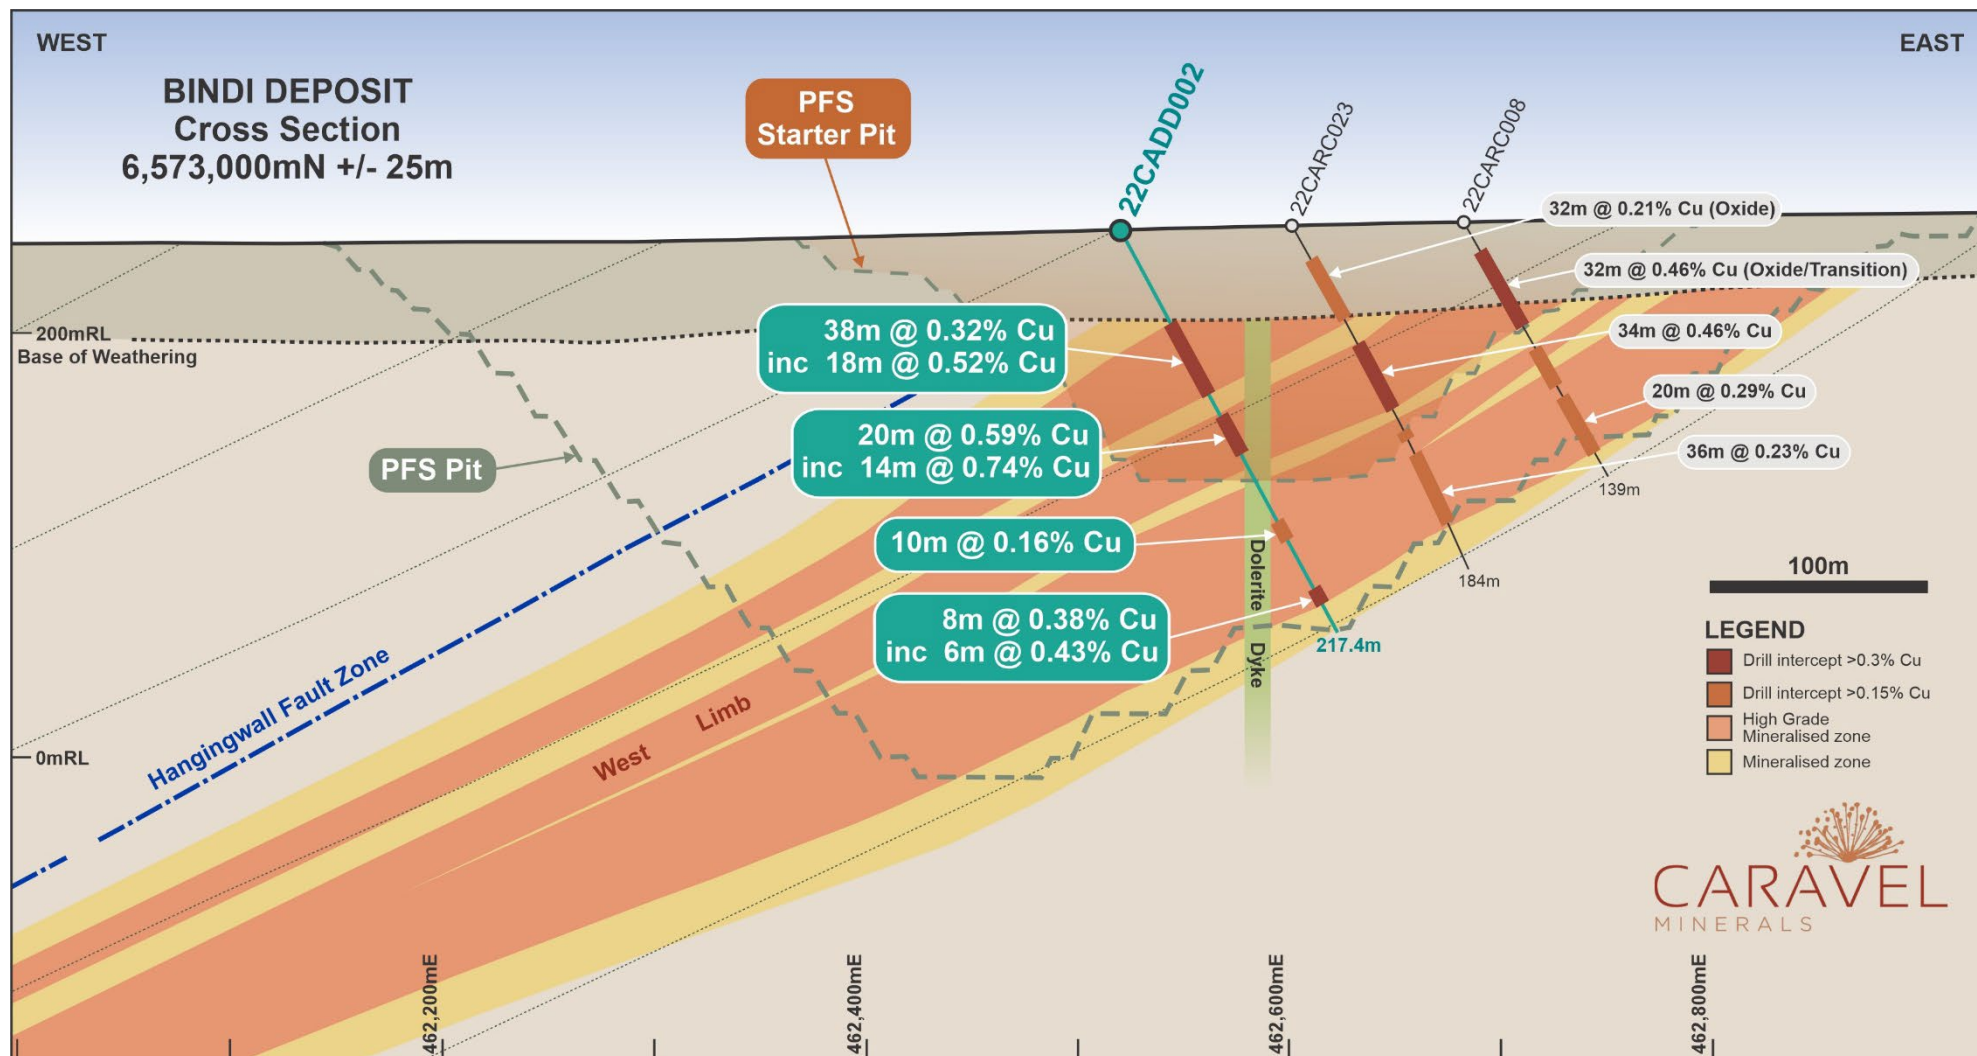


Figure 2: Schematic geological cross section of the Bindi Deposit West Limb (6,573,000mN) showing location of recent Diamond Core (CADD prefix) drill hole and mineralised intersections.

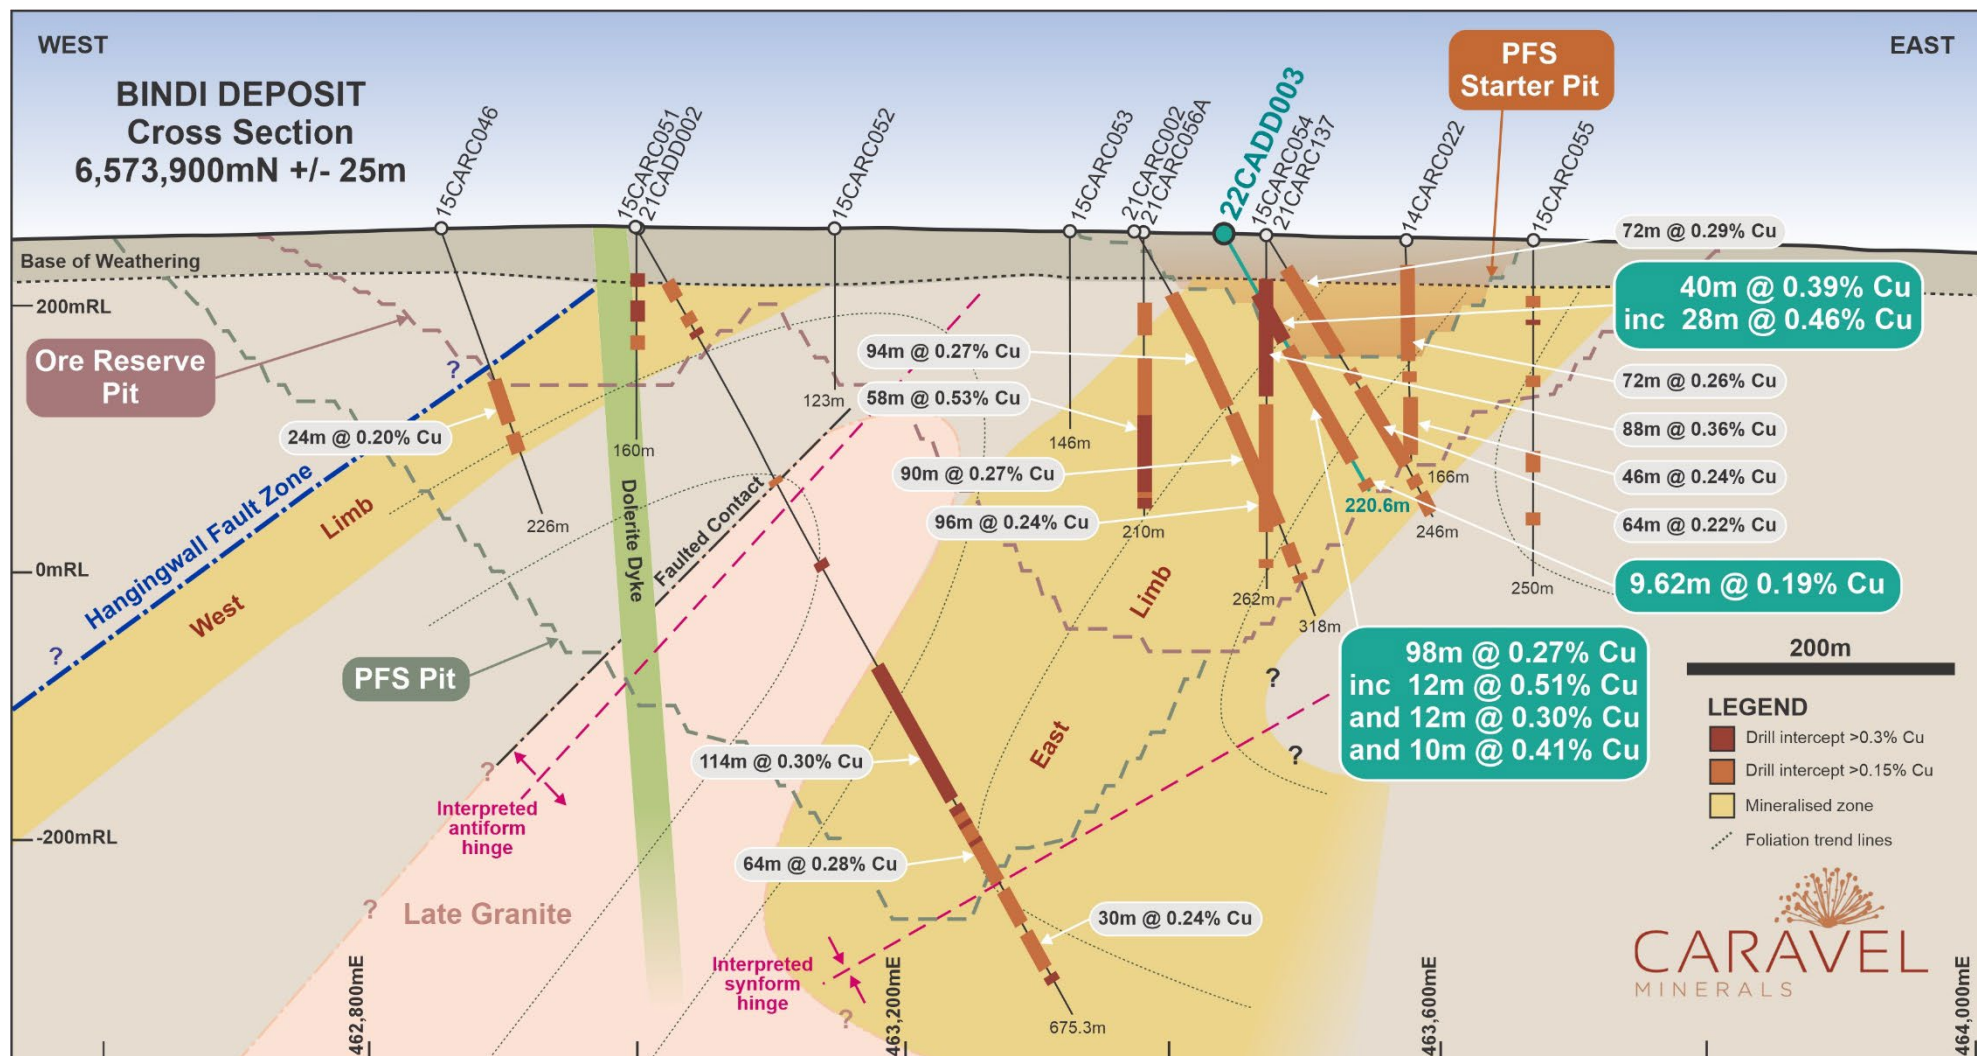


Figure 3: Schematic geological cross section of the Bindi Deposit East Limb (6,573,900mN) showing location of recent Diamond Core (CADD prefix) drill holes and mineralised intersections.

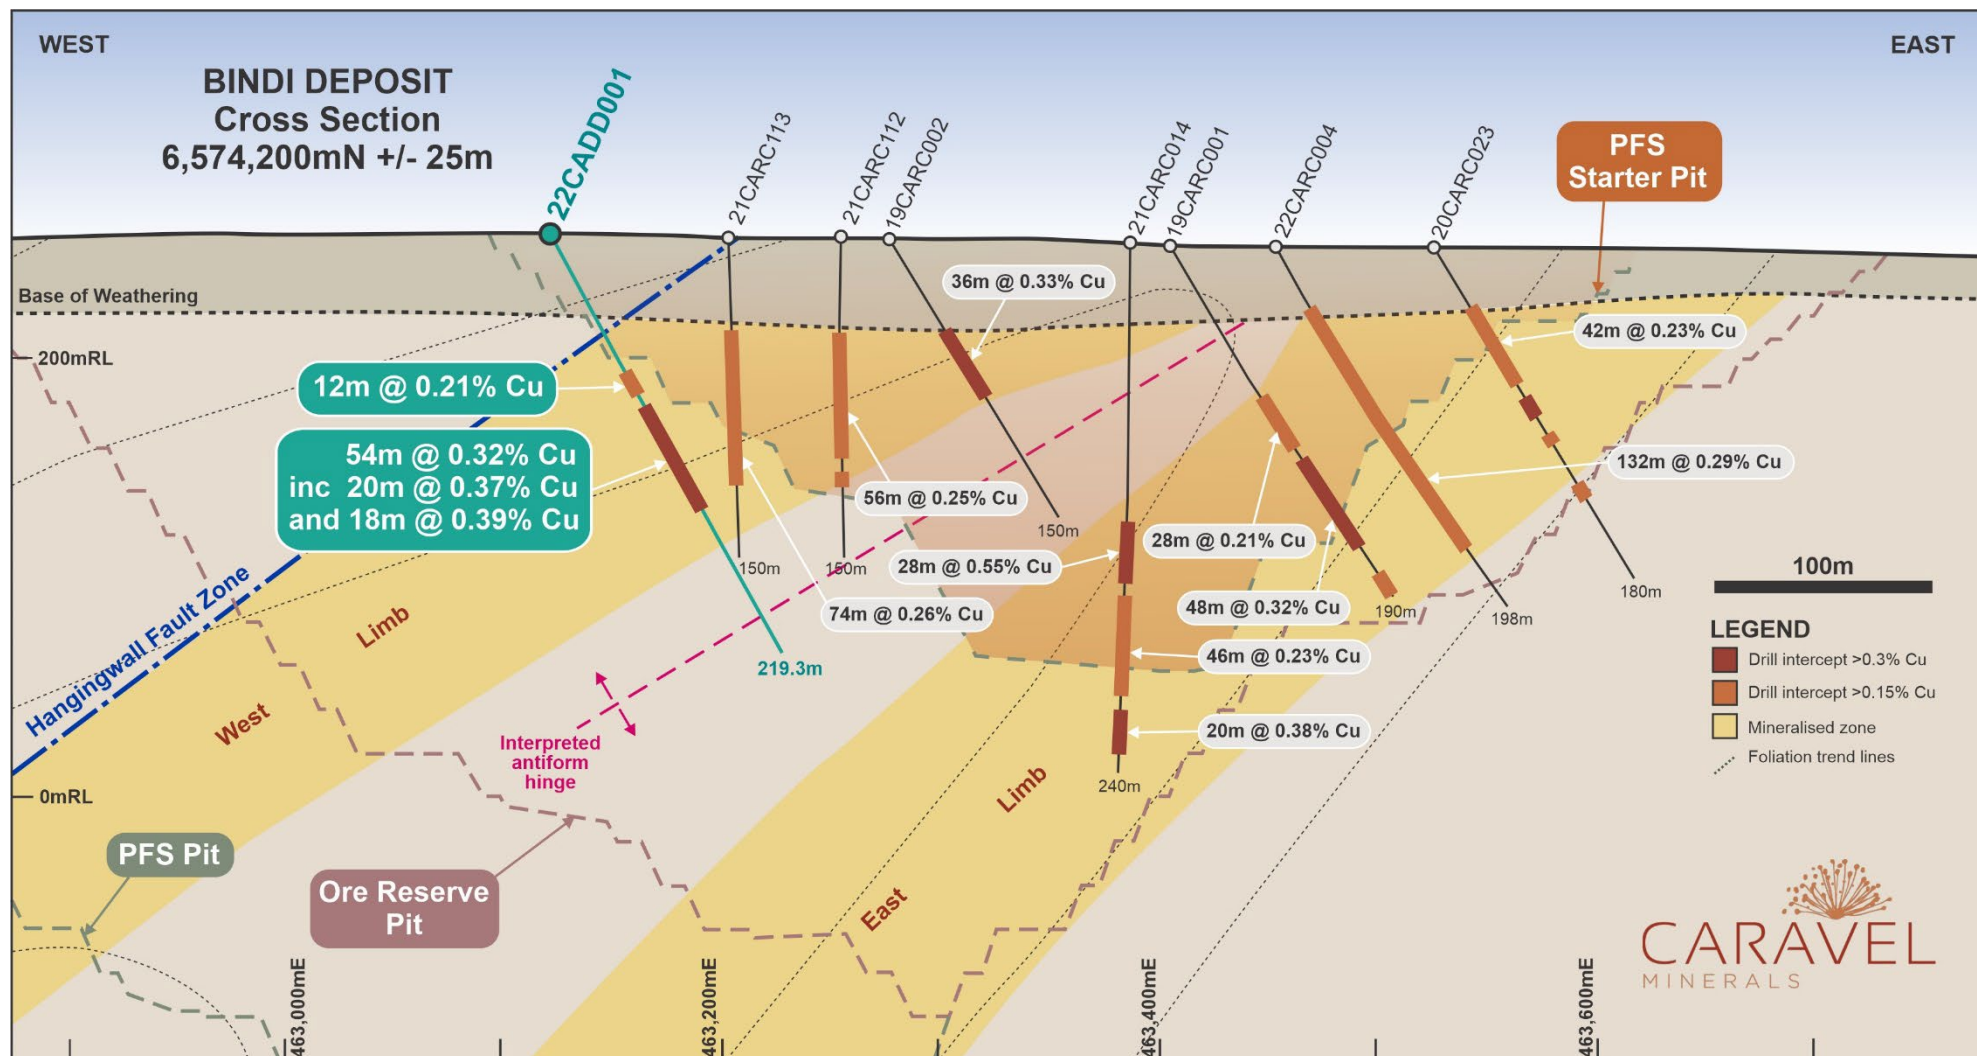


Figure 4: Schematic geological cross section of the Bindi Deposit West Limb (6,574,200mN) showing location of recent Diamond Core (CADD prefix) drill holes and mineralised intersections.

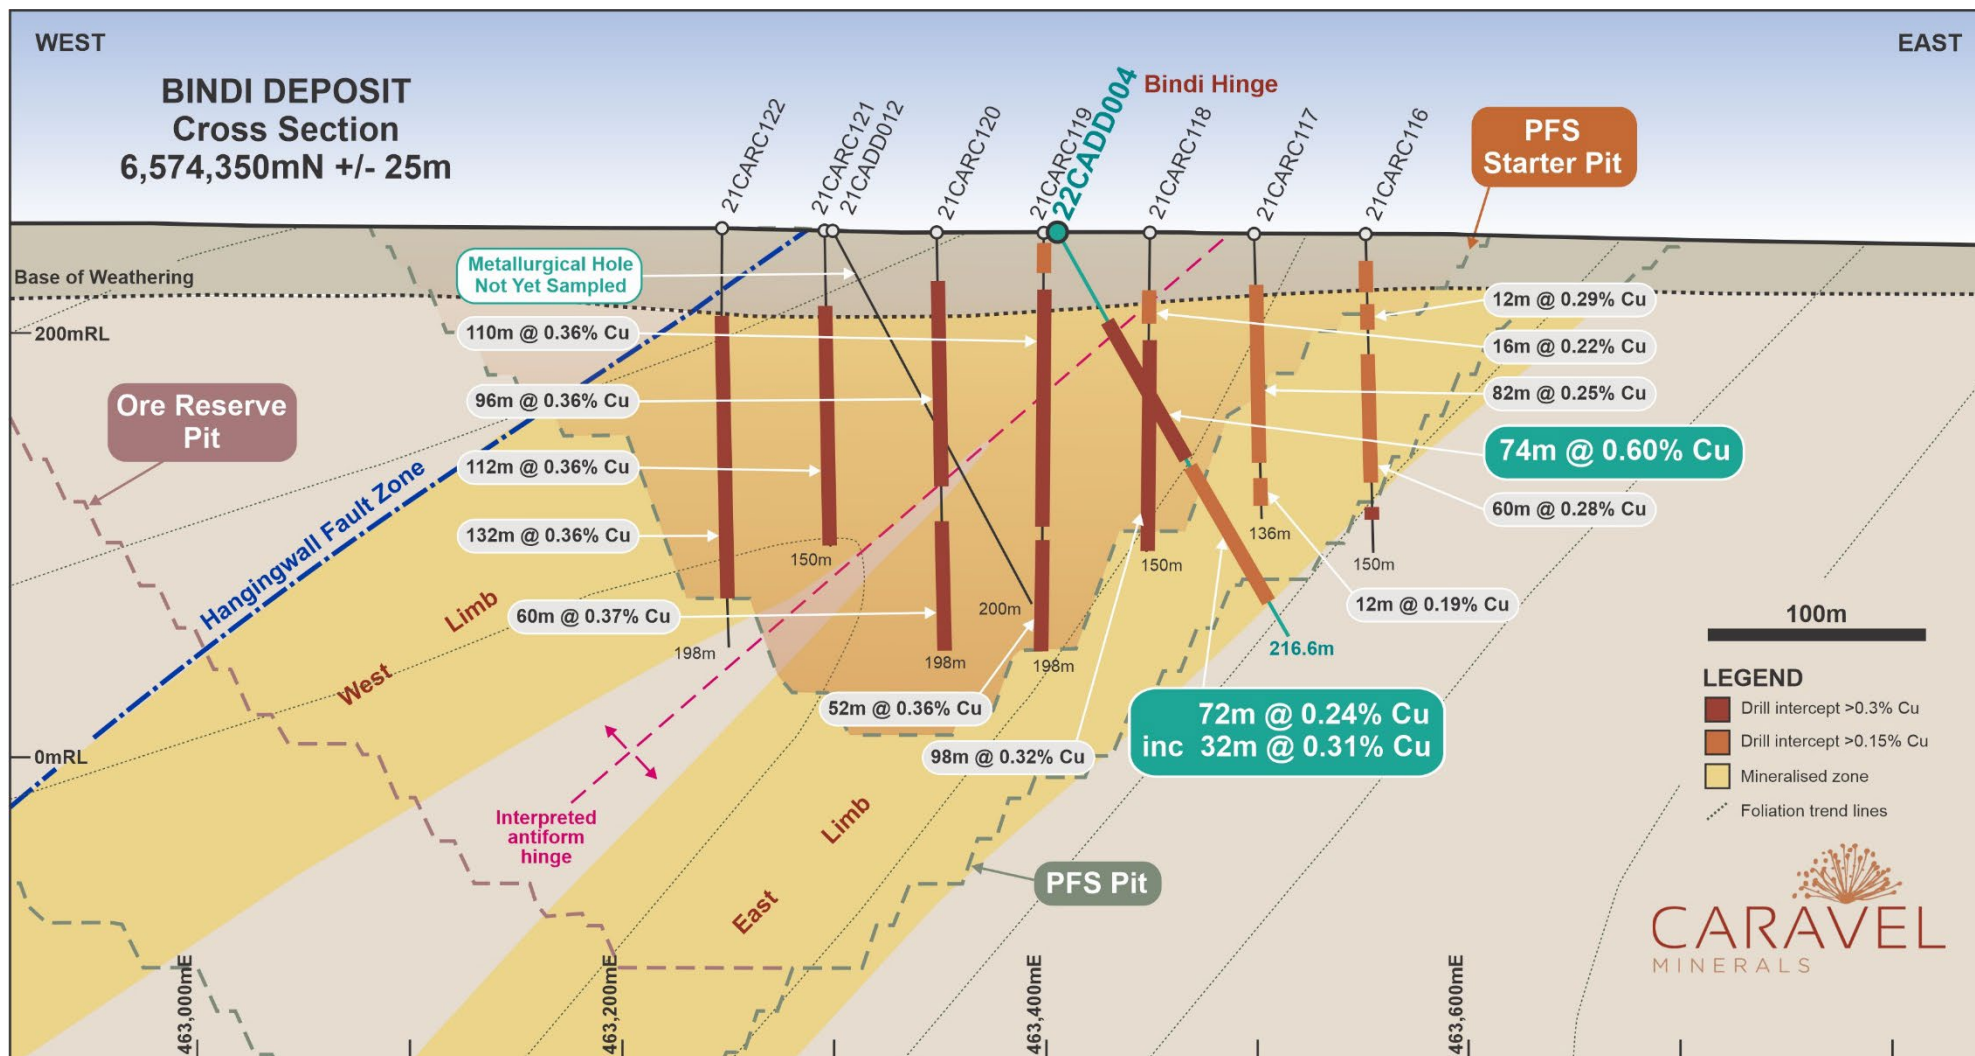


Figure 5: Schematic geological cross section of the Bindi Deposit Hinge Zone (6,574,350mN) showing location of recent Diamond Core (CADD prefix) drill holes and mineralised intersections.

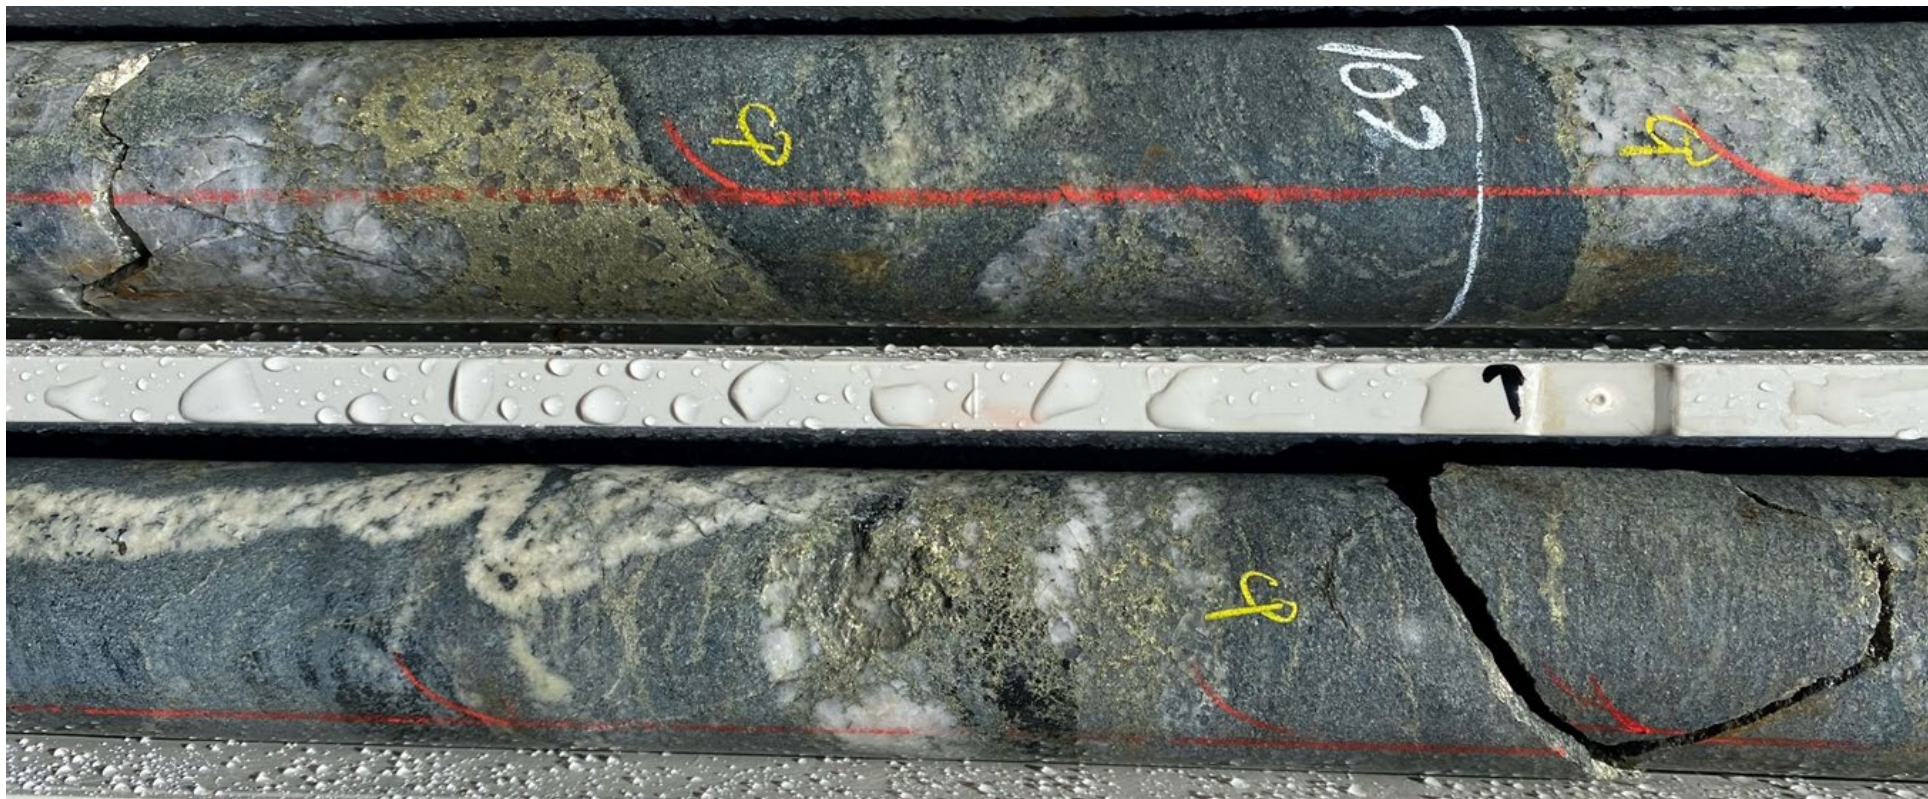


Figure 6: Diamond core from 22CADD004 (Bindi Hinge) 107-109m showing strong chalcopyrite stringer mineralisation.

Further Work

Drilling activities have been suspended during the cropping season and it is anticipated that major field work will resume in December after harvest. Future drilling will include:

- additional RC percussion drilling for to provide increased confidence in an updated resource estimate currently underway;
- further geotechnical diamond drill core holes; and
- Aircore sterilisation drilling for proposed mine infrastructure.

This announcement is authorised for release by Executive Director, Alasdair Cooke.

For further information, please contact:

Dan Davis
Company Secretary
Caravel Minerals Limited
Suite 1, 245 Churchill Avenue, Subiaco WA 6010
Telephone: 08 9426 6400
Email: investors@caravelminerals.com.au

ABOUT CARAVEL MINERALS

Caravel Minerals Limited (ASX:CVV) is advancing Definitive Feasibility Studies for the Caravel Copper Project, a large-scale, long-life (>28-year) copper project located 150km north-east of Perth in Western Australia's Wheatbelt region. The Project's PFS and Maiden Ore Reserve (July 2022) demonstrates a robust, executable project generating strong cash flows based on low operating costs (C1 ~US\$1.72/lb), a low life-of-mine strip ratio of 1.3:1 (including pre-strip), bulk mining methods, excellent metallurgy and low-cost grid power. Using automation and electrification technologies (ACE) for conventional open-pit mining and processing operations, Caravel will process ~27.8Mtpa of ore and produce ~62,000tpa of copper in a clean concentrate to be exported via existing public roads through local ports. The Project is based on a 2.84Mt contained copper Mineral Resource making Caravel Australia's largest undeveloped copper project based on contained Cu.

Competent Persons Statements

The information in this report that relates to Exploration Results is based on and fairly represents information compiled by Mr Peter Pring. Mr Pring is a Senior Exploration Geologist with Caravel Minerals. Mr Pring is a shareholder of Caravel Minerals and is a member of the Australasian Institute of Mining and Metallurgy. Mr Pring has sufficient experience of relevance to the styles of mineralisation and types of deposits under consideration, and to the activities undertaken to qualify as a Competent Person as defined in the 2012 Edition of the Joint Ore Reserves Committee (JORC) Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Pring consents to the inclusion in this report of the matters based on information in the form and context in which they appear.

The information in this report that relates to Mineral Resources is based on and fairly represents information compiled by Mr Lauritz Barnes, (Consultant with Trepanier Pty Ltd). Mr Barnes is a shareholder of Caravel Minerals. Mr Barnes is a member of both the Australasian Institute of Mining and Metallurgy and the Australasian Institute of Geoscientists. Mr Barnes has sufficient experience of relevance to the styles of mineralisation and types of deposits under consideration, and to the activities undertaken to qualify as a Competent Person as defined in the 2012 Edition of the Joint Ore Reserves Committee (JORC) Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Barnes consents to the inclusion in this report of the matters based on information in the form and context in which they appear.

Previous Disclosure The information in this report is based on the following Caravel Minerals ASX Announcements, which are available from the Caravel Minerals website www.caravelminerals.com.au and the ASX website www.asx.com.au:

- 25 August 2021 "Bindi Deposit – Updated Geological Model"
- 23 November 2021 "Major Mineral Resource Upgrade – Caravel Copper Project"
- 8 February 2022 "Drilling Results – Bindi Copper Deposit"
- 3 May 2022 "Drilling Results – Bindi Copper Deposit"
- 19 May 2022 "Drilling Results – Bindi Copper Deposit"
- 22 June 2022 "Drilling Results – Bindi Copper Deposit"
- 12 July 2022 "Caravel Copper Project Pre-Feasibility Study Highlights Robust, Executable Project and Reports Maiden Ore Reserve"

The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement and that all material assumptions and technical parameters underpinning the relevant market announcement continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person's findings are represented have not been materially modified from the original market announcement.

Forward Looking Statements This document may include forward looking statements. Forward looking statements include, but are not necessarily limited to, statements concerning Caravel Minerals planned exploration programmes, studies and other statements that are not historic facts. When used in this document, the words such as "could", "indicates", "plan", "estimate", "expect", "intend", "may", "potential", "should" and similar expressions are forward looking statements. Such statements involve risks and uncertainties, and no assurances can be provided that actual results or work completed will be consistent with these forward looking statements.

APPENDIX 1 – Drill hole collar details

Hole ID	Deposit	Hole Type	Easting (MGA)	Northing (MGA)	Elevation (m ASL)	Dip	Azimuth	Depth (m)
22CADD001	Bindi	DDH	463117.9	6574197.0	256.9	-61.3	88.9	219.3
22CADD002	Bindi	DDH	462519.9	6573003.3	249.3	-60.9	90.2	217.4
22CADD003	Bindi	DDH	463438.0	6573899.3	254.4	-61.6	90.6	220.6
22CADD004	Bindi	DDH	463402.5	6574354.1	249.3	-60.7	89.6	216.6

Note that collar locations are shown as GDA94 Datum, projected to MGA Zone 50 coordinates. Appropriate rounding of values has been applied.

APPENDIX 2 – Significant intersection summary at greater than 0.15% Cu cut-off grade.

Hole ID	Interval cut-off	From (m)	To (m)	Interval (m)	Cu Grade (%)	Mo Grade (ppm)
22CADD001 <i>Including</i> <i>And</i>	0.15	76	88	12	0.21	46.83
	0.15	94	148	54	0.32	86.48
	0.3	94	114	20	0.37	86.84
	0.3	120	138	18	0.39	123.5
22CADD002 <i>Including</i> <i>Including</i> <i>Including</i>	0.15	54	92	38	0.32	40.95
	0.3	66	84	18	0.52	71.51
	0.15	104	124	20	0.59	41.23
	0.3	110	124	14	0.74	42.01
	0.15	160	170	10	0.16	73.29
	0.15	196	204	8	0.38	5.87
	0.3	198	204	6	0.43	5.74
22CADD003 <i>Including</i> <i>Including</i> <i>And</i> <i>And</i>	0.15	48	88	40	0.39	110.74
	0.3	60	88	28	0.46	106.2
	0.15	94	192	98	0.27	45.68
	0.3	98	110	12	0.51	98.22
	0.3	126	138	12	0.30	56.23
	0.3	148	158	10	0.41	30.52
	0.15	210	219.62	9.62	0.19	21.25
22CADD004 <i>Including</i> <i>And</i>	0.15	44	118	74	0.60	79.5
	0.15	124	196	72	0.24	39.65
	0.3	130	162	32	0.31	31.41
	0.3	176	184	8	0.27	41.9

Results in the above table are reported as downhole intervals and are not true width as they are drilled at an oblique angle to the interpreted orientation of the mineralised zone. Appropriate rounding of values has been applied.

APPENDIX 3 - JORC Compliance Table

Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. - In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	- Aircore drilling (AC) was used to obtain a 1 metre sample which was placed in plastic bags. Material from the 1 metre sample bags was then combined into 3 metre composite samples for assay. A bottom of hole (BOH) sample was collected from the final metre of each hole. - Conventional Reverse Circulation (RC) percussion drilling was used to obtain representative 1 metre samples of approximately 1.5kg. Samples from each RC percussion meter were combined to form a 2m composite sample for assay. - Sampling was carried out under Caravel's standard protocols and QAQC procedures and is considered standard industry practice. - Conventional wireline diamond drilling was used to obtain a generally continuous drill core. - Where Diamond Drill Core holes were completed to provide metallurgical sample material. Whole HQ3 drill core was composited on 2m intervals, samples were fine crushed than (70% passing 2mm), a 500g subsample was then pulverised (nominal 85% passing 75 microns) to obtain a homogenous sub-sample for assay. - Where Diamond Drill Core holes were routine sampled, PQ or HQ3 drill core was cut in two, half core was composited on 2m intervals, the 2m composites were coarse crushed and then pulverised (nominal 85% passing 75 microns) to obtain a homogenous sub-sample for assay. - In the laboratory, samples are riffle split or crushed and split, then pulverised to a nominal 85% passing 75 microns to obtain a homogenous sub-sample for assay.
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	- Aircore drilling was completed using a 3 inch blade bit. - RC percussion drilling was completed using a 5 to 5.5 inch face sampling hammer bit. - Diamond core drilling was primarily completed using an HQ drill bit with HQ3 triple tube used where required to maximise core recovery. Diamond core holes were cored from surface with PQ to maximise core recoveries in the regolith. HQ3 Diamond core drilling produced near continuous drill core of approximately 61.1mm diameter. All core was oriented using the Boart Longyear Tru Core orientation tool.
Drill sample recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	- RC percussion and Aircore drill samples recoveries were assessed visually. Care was taken to ensure calico samples were of consistent volume. - Poor (low) recovery intervals were logged and entered into the database. - Recoveries of RC percussion drill samples remained relatively consistent throughout the program and are estimated to be 100% for 95% of drilling. - The RC cone splitter was routinely cleaned and inspected during drilling.

Criteria	JORC Code explanation	Commentary
		• Diamond drill core was routinely measured and cross-checked with drill blocks to determine recovery from each core tube. • Diamond drill core recoveries in fresh rock were excellent at near 100%. Where core loss did occur it was measured and recorded during logging. • There is no observed sample bias, nor a relationship observed between grade and recovery.
Logging	• <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> • <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> • <i>The total length and percentage of the relevant intersections logged.</i>	• AC, RC and Diamond Drill Core holes were logged geologically, including but not limited to, recording weathering, regolith, lithology, structure, texture, alteration, mineralisation (type and abundance) and magnetic susceptibility. • All holes and all relevant intersections were geologically logged in full. • Logging was at a qualitative and quantitative standard to support appropriate future Mineral Resource studies. • Representative material was collected from each RC percussion drill sample and stored in a chip tray. These chip trays were transferred to a secure Company facility close to the project area. • Remaining half core from Diamond Drill Core holes are stored at a secure facility close to the project area. • All diamond drill core was photographed and holes were also logged geotechnically. • Selected diamond drill holes were logged by a consulting structural geologist.
Sub-sampling techniques and sample preparation	• <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> • <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> • <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> • <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> • <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> • <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	• 1 metre AC samples were collected from the rig cyclone and placed in plastic bags. Material from the 1 metre sample bags was then combined into 3 metre composite samples for assay. A bottom of hole (BOH) sample was collected from the final metre of each hole. • 1 metre RC percussion drill samples were split off the drill rig cyclone into a calico bag using a cone splitter. For each 2m interval, the 1m split samples were fully combined to make one 2m composite. >95% of the samples were dry in nature. • RC percussion samples were weighed, dried, pulverized to 85% passing 75 microns. This is considered industry standard and appropriate. • Where Diamond Drill Core holes were completed to provide metallurgical sample material. Whole HQ drill core was composited on 2m intervals, samples were fine crushed than (70% passing 2mm), a 500g subsample was then pulverised (nominal 85% passing 75 microns) to obtain a homogenous sub-sample for assay. • Where Diamond Drill Core holes were routine sampled, HQ drill core was cut in two, half core was composited on 2 metre intervals, the 2m composites were coarse crushed and then pulverised (nominal 85% passing 75 microns) to obtain a homogenous sub-sample for assay. • Caravel has its own internal QAQC procedure involving the use of matrix matched certified reference materials (standards), blanks and field duplicates which accounts

Criteria	JORC Code explanation	Commentary
		for 8% of the total submitted samples. QAQC has been checked with no apparent issues. • Field duplicate data suggests there is general consistency in the drilling results. • The sample sizes are considered appropriate for the style of base and precious metal mineralisation observed which is typically coarse grained disseminated and stringer sulphides.
Quality of assay data and laboratory tests	• <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> • <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> • <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i>	• All drilling samples were assayed for a multi-element suite using multi-acid (4 acid) digestion with an ICP/OES and/or MS finish and with a 50g Fire Assay for gold with an AAS finish. • These techniques are considered appropriate and are industry best standard. The techniques are considered to be a total digest. • An internal QAQC procedure involving the use of matrix matched certified reference materials (standards), blanks and duplicates accounts for 8% of the total submitted samples. • The certified reference materials used have a representative range of values typical of low, moderate and high grade copper mineralisation. Standard results for drilling demonstrated assay values are both accurate and precise. Blank results demonstrate there is negligible cross-contamination between samples. Duplicate results suggest there is reasonable repeatability between samples.
Verification of sampling and assaying	• <i>The verification of significant intersections by either independent or alternative company personnel.</i> • <i>The use of twinned holes.</i> • <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> • <i>Discuss any adjustment to assay data.</i>	• Verification of significant intersections has been completed by the Caravel database administrator. • Two pairs of twinned holes (RC percussion and diamond drill core) have been drilled for comparative purposes. The twinned holes show good correlation. • All RC composite samples are analysed in the field with a portable XRF analyser with results used for drill program planning, XRF results show good correlation with later assays. • Primary data was collected via digital logging hardware and software using in-house logging methodology and codes. • Logging data was sent to the Perth based office where the data was validated and entered into an industry standard master database maintained by the Caravel database administrator. • There has been no adjustments to the assay data.
Location of data points	• <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> • <i>Specification of the grid system used.</i> • <i>Quality and adequacy of topographic control.</i>	• Initial hole collar locations are surveyed with handheld GPS with an accuracy of less than 3m. • RC and diamond core hole collar locations are surveyed prior to rehabilitation with DGPS instruments with accuracy of less than $\pm 10\text{cm}$.

Criteria	JORC Code explanation	Commentary
		- Downhole surveys were completed on all drill holes using a gyro downhole survey tool at downhole intervals of approximately every 30m for RC holes and every 10m in Diamond Core Holes. - The grid system used for location of all drill holes as shown in tables and on figures is MGA Zone 50, GDA94. - Hole collar RLs were accurately DGPS surveyed and conform with local surveyed topographic control.
<i>Data spacing and distribution</i>	<i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i>	- AC drill holes are spaced 200m apart on traverses 200m apart, 100m hole spacing is used where field observations indicate the presence of mineralisation. - RC and diamond drill hole spacing is variable, being on nominal 200m spaced lines in most areas and 50m spaced lines in Bindi East. - Drill collars are spaced 80-100m on lines in most areas and spaced 50m at Bindi East. - Drill hole spacing and distribution is considered sufficient as to make geological and grade continuity assumptions appropriate for Mineral Resource estimation. 2m sample compositing of the RC percussion drilling and diamond core drilling samples was routinely used.
<i>Orientation of data in relation to geological structure</i>	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	- The orientation of drilling and sampling is not considered to have any significant biasing effects. - The drill holes are usually angled to the east and are interpreted to have intersected the mineralised structures approximately perpendicular to their dip. - The RC percussion drill holes reported here were drilled vertically and have intersected the mineralised structures at variable angles given the interpreted structural complexity in the fold hinge zone. - Folding of the mineralised granitic gneiss means that sections of some holes drilled in hinge zones have been drilled down dip.
<i>Sample security</i>	<i>The measures taken to ensure sample security.</i>	- Sample chain of custody is managed by Caravel. - Sampling of RC percussion drilling is carried out by Caravel field staff. - Cutting and sampling of diamond drill core is carried out by Caravel field staff. - Samples are stored at a secure site and transported to the Perth laboratory by a reliable courier service.
<i>Audits or reviews</i>	<i>The results of any audits or reviews of sampling techniques and data.</i>	No audit or review has been carried out.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	• <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> • <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	• The results relate to drilling completed on exploration licence E70/2788 and E70/3674. • The tenements are held 100% by Caravel Minerals. • Bindi Deposit lies within the mining lease application M70/1410, the Dasher Deposit lies within the mining lease application M70/1411. The general purpose lease applications G70/262 and G70/263 are adjacent to the mining lease applications. • The tenements mainly overlay freehold farming land. • The tenements are held securely and no impediments to obtaining a licence to operate have been identified. • The exploration licences are covered by the South West Native Title Settlement which commenced 25th February 2021. • Heritage agreements are in place of the exploration licences
<i>Exploration done by other parties</i>	• <i>Acknowledgment and appraisal of exploration by other parties.</i>	• Discovery of the Bindi Deposit was made by Dominion Mining in 2008, following up anomalous copper geochemical results from a roadside sampling program. There had been limited modern mineral exploration in the area prior to that time. • Programs of aircore, RC percussion and diamond drilling were subsequently completed, along with geological mapping and both surface (IP) and airborne (magnetics) geophysical surveys. • Further drilling and feasibility studies were completed as part of a JV with First Quantum Minerals between 2015-2017 and a maiden resource estimate for the deposit was completed in 2016. • Caravel Minerals has conducted programs of RC percussion and diamond drilling at the deposit between 2017-2022, in addition to further engineering studies, metallurgical and ore sorting testwork. • An updated resource estimate was completed in 2021.
<i>Geology</i>	• <i>Deposit type, geological setting and style of mineralisation.</i>	➤ The mineralisation is interpreted to be of porphyry style which occurs within a possible larger scale Archean subduction related geological setting. ➤ The deposit and host rocks have subsequently been metamorphosed to upper amphibolite facies. ➤ The mineralised granitic gneiss at Bindi has been deformed into a tight fold, overturned to the east with the fold hinge plunging to the northwest. ➤ The mineralisation typically forms broad, tabular zones in the order of 50-100m true thickness, zones of higher grade material are associated with fold hinges.

Criteria	JORC Code explanation	Commentary
		➤ The mineralisation at Bindi typically consists of chalcopyrite + molybdenite, stringers and disseminations with associated pyrite ±pyrrhotite within a coarse-grained, quartz-feldspar-biotite ±garnet ±sillimanite gneiss. ➤ The mineralised granitic gneiss is overlain by upto 40m of largely barren regolith consisting of an upper laterite and saprolitic clay. Minor oxide (supergene) mineralisation is variably developed as a sub-horizontal zone within the regolith profile east of the Bindi East Limb.
Drill hole Information	• A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes, including Easting and northing of the drill hole collar, Elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar, dip and azimuth of the hole, down hole length and interception depth plus hole length. • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	• All material information is summarised in the tables included in the body of the announcement.
Data aggregation methods	• In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated.	• Exploration results are based on length-weighted average grades. • No maximum or minimum grade truncations have been applied. • A cut-off grade of 0.15% has been applied to significant intersections. • Significant intersections do not contain intervals of more than 2 consecutive sub-grade samples. • No metal equivalent values have been reported.
Relationship between mineralisation widths and intercept lengths	• These relationships are particularly important in the reporting of Exploration Results. • If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. • If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	• The orientation of drilling and sampling is not considered to have any significant biasing effects. • RC and diamond core drill holes are usually angled to the east and are interpreted to have intersected the mineralised structures approximately perpendicular to their dip such that down hole intervals reported are considered to be close to true width. • Historically RC percussion drill holes were drilled vertically and have intersected the mineralised structures at variable angles given the interpreted structural complexity in the fold hinge zones. • Folding of the mineralised granitic gneiss means that sections of some holes drilled in hinge zones have been drilled down dip.
Diagrams	• Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should	• Refer to figures included in the body of the announcement.

Criteria	JORC Code explanation	Commentary
	<i>include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	
<i>Balanced reporting</i>	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	- Comprehensive reporting of all results is not practicable. - Representative intersections have been reported in the body of the announcement.
<i>Other substantive exploration data</i>	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	Downhole televiewer surveys are completed on all diamond core holes to collect geotechnical and structural geological data.
<i>Further work</i>	- The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). - Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	- Further diamond core drilling has been completed to collect geotechnical information in the starter pit walls. - Further drilling will include additional RC drilling to increase resource confidence, extra geotechnical diamond core drilling and AC sterilisation drilling for mine infrastructure.