DRILLING CONTINUES TO ADVANCE AT NAKED HILL IAC REE PROJECT, BRAZIL

HIGHLIGHTS:

- **35 drill holes completed to date at Naked Hill-Bald Hill complex (comprising 14 diamond holes and 2 auger holes in previous campaign in Dec 2025-Feb 2026 and 19 auger holes in current campaign in July-Aug 2026)**
- **1,172m drilling completed so far across the two drilling programs at Naked Hill Project**
- **More than 150 samples have been sent out to SGS Geosol laboratory for head assay and leach testing**
- **Assay results for 16 holes of Dec 2025-Feb 2026 program previously announced[1]**
- **An approximately 200-hole auger drilling program which will be completed in three phases, is designed to define the extent and continuity of saprolite-hosted rare earth element (REE) mineralisation and support resource delineation**
- **Resource delineation auger drilling progressing at a rate of 6 - 8 holes per week at Bald Hill target**
- **Second auger rig now deployed to boost the rate of drilling**
- **Integrated mineral characterisation and hydrometallurgical test work for selective REE extraction is progressing**
- **Mineralisation is hosted within ionic adsorption clay (IAC) REE-bearing saprolite overlying the Medina Intrusive Granite Complex, consistent with granite-derived saprolite systems**

For personal use only

Enova Mining Limited (**ASX: ENV**) (**Enova** or **the Company**) is pleased to announce that resource delineation drilling is currently underway with 19 auger holes (Table 1 and 2) of the current program completed so far at the Bald Hill and Naked Hill targets, located within the Naked Hill Project, East Salinas, Minas Gerais, Brazil.

The current program comprises approximately 200 auger holes (plan may vary based on the outcome of exploration) to be completed in three phases, is designed to define the extent and continuity of saprolite-hosted IAC REE mineralisation and support resource delineation.

[1] ASX announcement: 10 Feb 2026 & 9 April 2026

Previous diamond and auger drilling confirmed IAC amenability of REE-bearing saprolite from surface across multiple holes. Integrated mineral characterisation and hydrometallurgical test-work for IAC REE extraction, led by Alexandre Rocha da Rocha and Geological Consultores Associados, is progressing.

Enova Mining CEO / Executive Director Eric Vesel commented:

"We are pleased with the progress at Naked Hill, with 35 drill holes now been completed, including 19 auger holes from the current campaign. Resource delineation drilling at Bald Hill continues to advance at a rate of 6 to 8 holes per week, which is now further supported by the deployment of a second auger rig. The ongoing approximately 200-hole auger drilling program is designed to define the extent and continuity of saprolite-hosted REE mineralisation and provide a solid foundation for future resource estimation.

Encouragingly, previous assay results confirmed REE mineralisation hosted within IAC-bearing saprolite, reinforcing our confidence in the Project's geological potential. More than 150 samples have now been submitted to SGS Geosol laboratory for head assays and leach testing, while integrated mineral characterisation and hydrometallurgical studies are in progress. Together, these workstreams are rapidly advancing the development of Naked Hill."

Progress at East Salinas and Regional Tenements

Enova's priority is to establish IAC REE resources at the Naked Hill Project. Resource delineation drilling is underway with 19 auger holes of the current program completed so far (including two twin auger holes and two short auger holes) at the Bald Hill and Naked Hill targets. This program follows previous diamond and auger drilling that confirmed extensive saprolite-hosted REE mineralisation and IAC amenability. The current program is designed to define the extent and continuity of the mineralised saprolite and support future resource definition. Auger drilling is progressively delineating the extent of the mineralisation, as illustrated below, Figure 1.

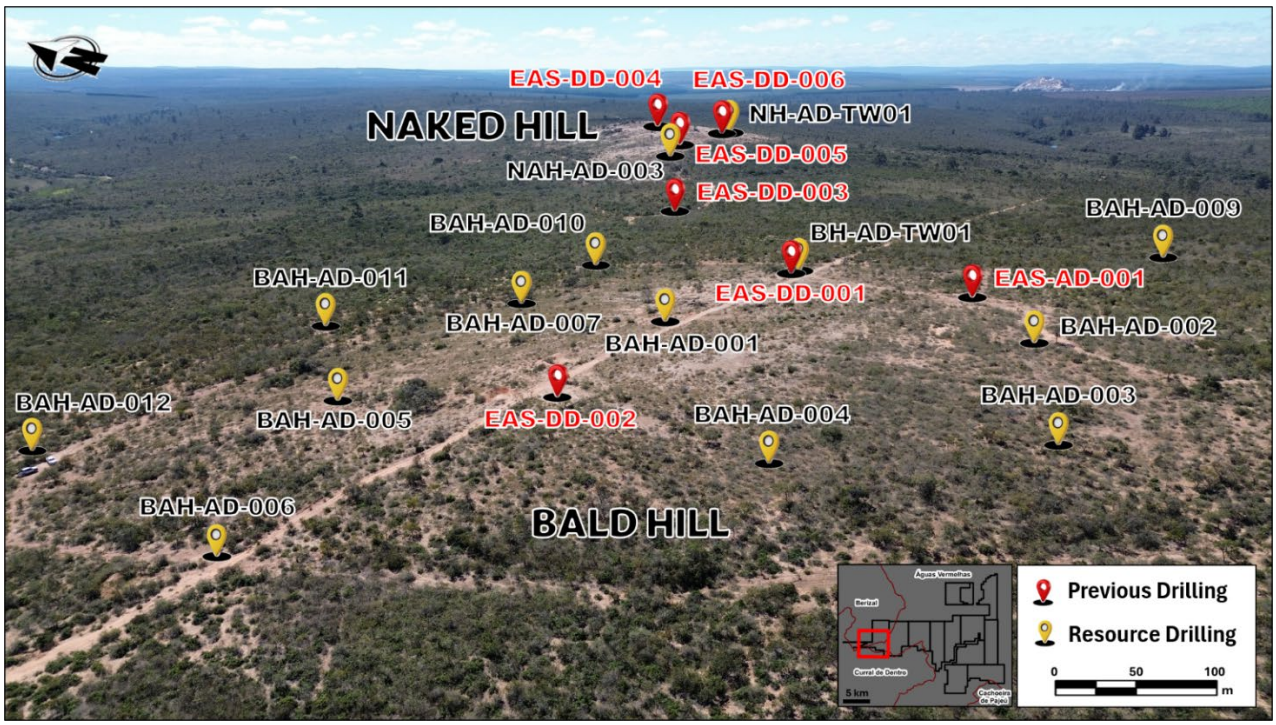


Figure 1: Perspective view showing drilling progress, commenced at Bald Hill

For personal use only

While continuing engagement with the local stakeholders for accessing the Naked Hill Project area, Enova also completed auger drilling in regional East Salinas, Santo Antonio Do Jacinto and geochemical sampling in Carai and Resplendor packages

Resource Delineation Drilling at the Naked Hill Project

19 auger drillholes have been completed in Bald Hill and drilling has now commenced in Naked Hill on a 200m x 200m grid (red circular dots in Figure 2. Planned holes of phases 2 and 3 will be drilled on 100m × 100m grid is shown in black circular dots in Figure 2.

The program is designed to define the extent and continuity of saprolite-hosted IAC REE mineralisation across the Bald Hill, Naked Hill, Hairy Hill and Flat Hill prospects. Results from each phase will be used to refine the geological model and support resource delineation.

For personal use only

HoleID	Type	Target/Prospect	Easting	Northing	Elevation	Depth (m)
BH-AD-TW01	Auger Twin	Bald Hill	211465	8251268	945	12.30
NH-AD-TW01	Auger Twin	Naked Hill	212445	8251509	929	12.00
BAH-AD-001	Auger	Bald Hill	211370	8251290	947	7.00
BAH-AD-002	Auger	Bald Hill	211470	8251190	948	10.00
BAH-AD-003	Auger	Bald Hill	211370	8251090	954	11.00
BAH-AD-004	Auger	Bald Hill	211270	8251190	948	6.00
BAH-AD-005	Auger	Bald Hill	211270	8251340	938	9.00
BAH-AD-006	Auger	Bald Hill	211170	8251340	936	12.00
BAH-AD-007	Auger	Bald Hill	211470	8251390	935	3.00
BAH-AD-008	Auger	Bald Hill	211570	8251290	939	8.00
BAH-AD-009	Auger	Bald Hill	211595	8251090	940	17.00
BAH-AD-010A	Auger	Bald Hill	211570	8251490	923	2.00
BAH-AD-010B	Auger	Bald Hill	211557	8251427	919	3.00
BAH-AD-010C	Auger	Bald Hill	211517	8251390	918	7.00
BAH-AD-011	Auger	Bald Hill	211370	8251490	925	9.00
BAH-AD-012	Auger	Bald Hill	211170	8251490	925	14.00
BAH-AD-013	Auger	Bald Hill	211170	8251090	940	11.00
NAH-AD-001	Auger	Naked Hill	212470	8251590	943	7.00
NAH-AD-003	Auger	Naked Hill	212270	8251590	930	3.00
				Total drilling		163.3

Table 1: Current auger drilling campaign statistics in Naked Hill Project at East Salinas

Hole type	Target	Number of holes	Metreage (m)
Diamond Drilling (Dec -Feb 2026)	Bald Hill, Naked Hill, Hairy Hill and Flat Hill	14	989.63
Auger drilling (Dec -Feb 2026)	Bald & Naked Hill	2	19.50
Auger drilling (Current campaign, ongoing)	Bald & Naked Hill	19	163.3
Total		**35**	**1172.43**

Table 2: Overview of drilling in Naked Hill Project at East Salinas

For personal use only

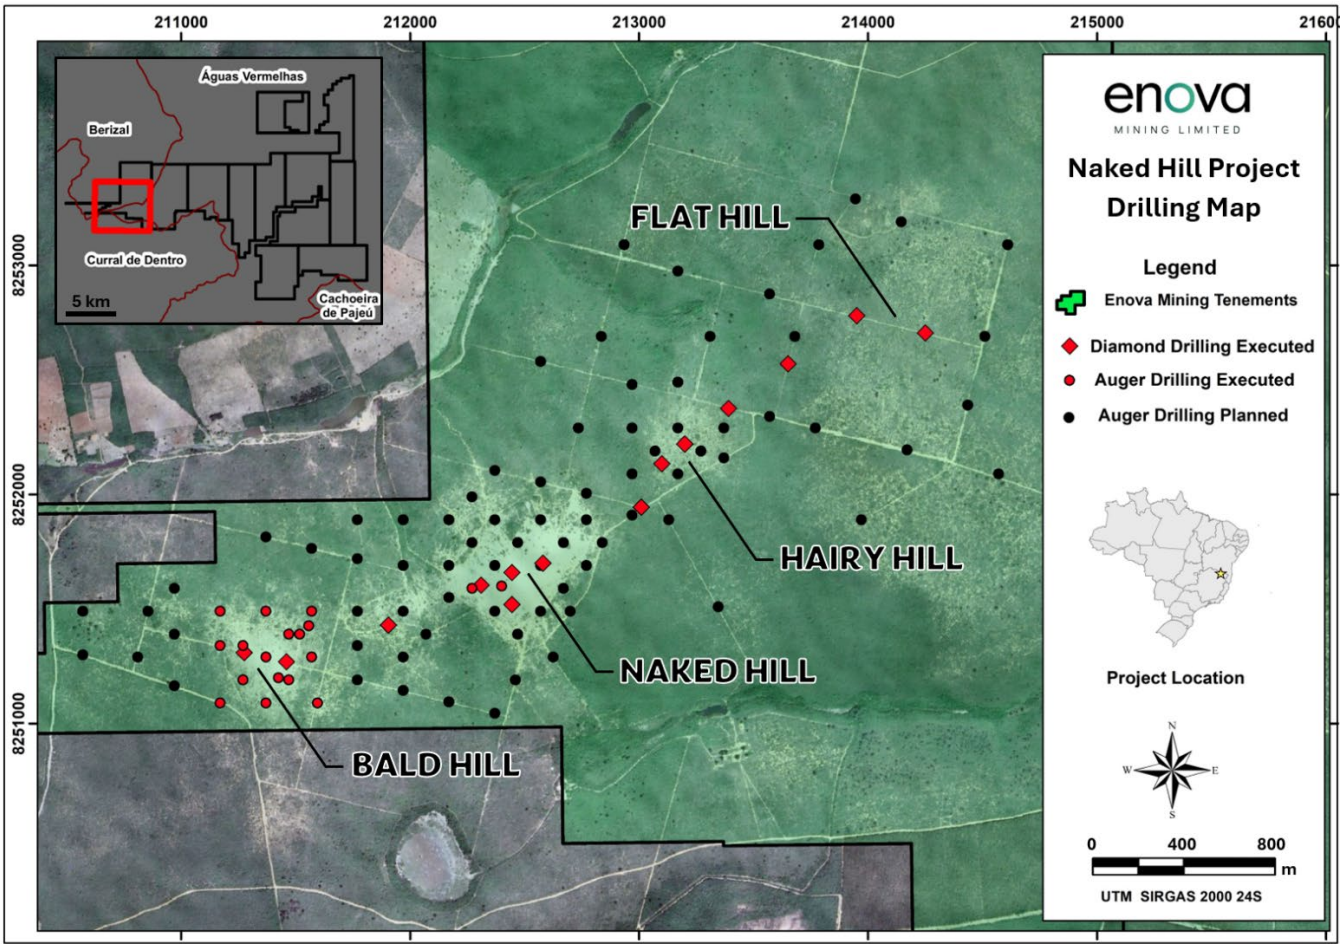


Figure 2: Naked Hill Project auger drilling collar locations

Portable auger drilling is underway at the Bald Hill and Naked Hill Prospects, targeting near-surface saprolite-hosted REE mineralisation (Figure 3). The drilling program is providing valuable data on soil and weathered rock profiles, helping to improve the understanding of the extent, geological control, material characteristics and distribution of IAC REE mineralisation in Naked Hill Project.

For personal use only



Figure 3: Auger site BAH-AD-0005 in Bald Hill target, East Salinas.

Auger drill cuttings from hole BAH-AD-0009 is collected and logged in the field, with representative samples preserved in chip trays for geological assessment and laboratory analysis (Figure 4A and 4B).

For personal use only

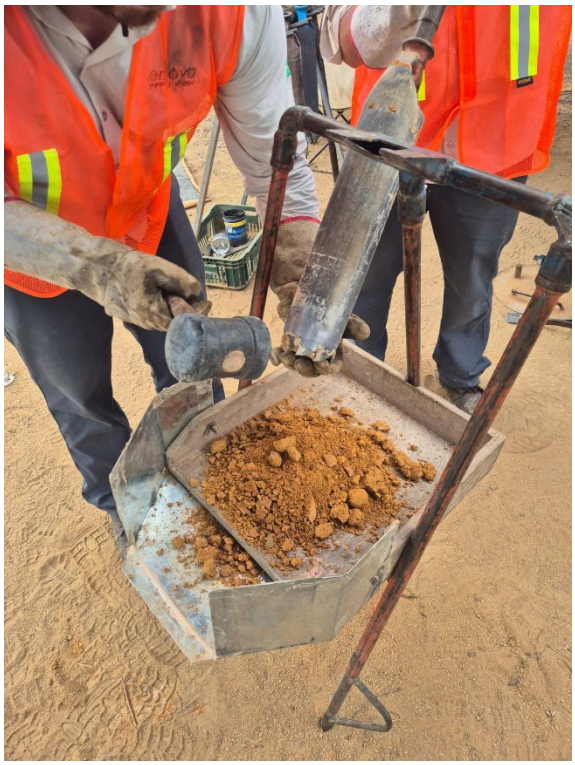




Figure 4A and 4B: Samples are collected from barrel (BAH-AD-0009) and preserved in chip trays

Batches of auger drill samples from holes BAH-AD-0003 to BAH-AD-0007 at the Bald Hill target are prepared, catalogued, and ready for dispatch to the laboratory for geochemical analysis and metallurgical testing (Figure 5).



Figure 5: Batches of samples from BAH-AD-003 to BAH-AD-007 at Águas Vermelhas warehouse prior dispatch

Previously Reported Selected Significant Results

REE Assays (ASX Announcements: 10 February 2026, 9 April 2026, 20 May 2026)

- 13m @ 2,418ppm TREO and 21% NdPr from surface (EAS-AD-0001), includes 9m @ 2,859ppm TREO and 21.6% NdPr from subface and 7m @ 3,020ppm TREO and 22.5% NdPr from 2m[2]
- 7m @ 2,621ppm TREO and 20.5% NdPr from surface (EAS-AD-0002), includes 6m @ 2,800ppm TREO and 21% NdPr from surface and 3m @ 3,307ppm TREO and 22% NdPr from 1m[4]
- Peak head grade of 4,874ppm TREO @ 25% NdPr from 8 - 9m (EAS-AD-0001) [4]
- Peak MREO recovery of 84% from 8 - 9m (EAS-AD-0001) [4]
- 17m @ 5,000ppm TREO and 19% NdPr from surface (EAS-DD-0006),

  includes 16m @ 5,137ppm TREO and 20% NdPr from 1m[5]
- 12m @ 1,866ppm TREO and 19% NdPr from surface (EAS-DD-0007),

  includes 6.4m @ 2,387ppm TREO and 20% NdPr from surface[5]
- 6m @ 3,311ppm TREO and 20% NdPr from 14m (EAS-DD-0008)

  includes 5m @ 3,772ppm TREO and 19% NdPr and

  3m @ 4,667ppm TREO and 16% NdPr from 15m[5]
- Peak grade of 12,732ppm (1.27%) TREO @ 24% NdPr from 7 - 8m (EAS-DD-0006) [5]
- 12m@ 2,741ppm TREO and 23% NdPr from surface (EAS-DD-0001)[3]
- 7 m @ 3,467 ppm TREO and 21.5% NdPr from surface (EAS-DD-0004)

Auger Leach Test Results (ASX announcement 20 May 2026)

Recent leach test-work from auger holes EAS-AD0001 at Bald Hill and EAS-AD0002 at Naked Hill confirmed the IAC characteristics of the mineralisation, providing a strong technical endorsement of the projects' rare earth development potential.

Leach test recovery highlights for EAS-AD-0001 and EAS-AD-0002 are:

- 43.2% MREO and 38.7% HREO recovery for complete hole of 13m for EAS-AD-0001(Bald Hill) with peak recoveries of 84.4% MREO[4] and 84.4% HREO[5]+Y Oxide
- 31% MREO and 39.1% HREO recovery for 2.5m complete hole EAS-AD-0002(Naked Hill) with peak recoveries of 37.9% MREO and 41.2% HREO +Y Oxide,

[2] ASX Announcement, 20 May 2026 "FURTHER AUGER REE RESULTS EXTEND IAC MINERALISATION AT EAST SALINAS, BRAZIL"
[3] ASX announcement, 10 February 2026 "DISCOVERY OF SURFACE IONIC ADSORPTION REE MINERALISATION AT EAST SALINAS"
[4] MREO: Magnetic Rare Earth Oxide include rare earth element Nd, Pr, Dy,Tb
[5] HREO+Y: Heavy Rare Earth Oxides exclude Ce, La and MREO

For personal use only

A summary of the key leach recovery results is presented in Table 3.[6]

LEACH TEST SAMPLE DETAIL				HEAD GRADE			DESORPTION SOLN. GRADE		RECOVERIES	
HOLE_ID	FROM (m)	TO (m)	INTERVAL (m)	TREO (ppm)	MRE Oxide (ppm)	HRE+Y Oxide (ppm)	MRE Oxide (ppm)	HRE+Y Oxide (ppm)	MRE Oxide (%)	HRE+Y Oxide (%)
EAS-AD-0001	0	1	1	2182	403	127	103	44	26%	35%
	1	2	1	2255	484	137	206	39	42%	29%
	2	3	1	3318	816	364	55	12	7%	3%
	3	4	1	3152	739	301	250	52	34%	17%
	4	5	1	2201	469	151	220	50	47%	33%
	5	6	1	1734	364	131	175	44	48%	34%
	6	7	1	1758	409	150	73	24	18%	16%
	7	8	1	3842	1046	438	835	363	80%	83%
	8	9	1	4774	1285	559	1085	472	84%	84%
	9	10	1	1284	313	141	190	71	60%	50%
	10	11	1	1415	330	134	164	59	50%	44%
	11	12	1	1339	294	111	103	44	35%	40%
	12	13	1	1232	257	103	78	35	30%	33%
EAS-AD-0002	0	1	1	2646	571	197	160	44	28%	23%
	1	2	1	3734	894	326	206	53	23%	16%
	2	3	1	3109	703	248	165	44	23%	18%
	3	4	1	3079	676	233	120	37	18%	16%
	4	5	1	2120	461	193	175	80	38%	41%
	5	6	1	2111	414	186	122	75	29%	40%
	6	7	1	1547	288	129	59	42	20%	33%

Table 3: Significant IAC leach test recovery statistics in auger hole in East Salinas
(only significant results are listed above)

Samples received by the laboratory weighed greater than 3kg. Oversize material was sieved and reduced to -4mm prior to homogenisation. Each sample was split to generate a head-grade aliquot and a leach test aliquot. Leach testing was conducted on 40g samples for 30 minutes using 160ml of a cold-water solution containing 0.5 mol per litre AMSUL solution of pH 4. Following leaching, samples were filtered under vacuum and the residue washed with 80ml of 0.15 mol per litre AMSUL solution. An aliquot of the leach solution was diluted 25 times with 2% HNO3 and analysed using ICP-MS and ICP-OES techniques.

Thorium (average: 0.61 ppm and <0.94ppm) and uranium (average: 2.49 ppm and <3.29ppm) leach recovery was negligible. Complete REE leach test results are provided in Appendix C Table 7.

These results are particularly encouraging given the strong recoveries achieved for the high-value magnet rare earths and heavy rare earth elements, reinforcing the potential for a low-cost extraction pathway typical of attractive IAC-hosted rare earth systems.

Metallurgical Test Work Plan

Integrated mineral characterisation and hydrometallurgical test work, being undertaken by Alexandre Rocha Da Rocha and Geological Consultores Associados, represents the initial phase of the metallurgical assessment of Enova's IAC-hosted REE mineralisation. The objective of the program is to evaluate desorption behaviour and downstream precipitation processes at bench scale, providing key inputs for future metallurgical development and engineering studies.

[6] TREO: Total Rare Earth Oxide Recovery %; LREO: Light Rare Earth Oxide Recovery %; HREO: Heavy Rare Earth Oxide Recovery %: NdPr: Nd_2O_3 +Pr_6O_{11} Recovery %, MREO: Magnetic Rare Earth Oxide (Nd_2O_3 + Pr_6O_{11} + Dy_2O_3 + Tb_4O_7) Recovery %

For personal use only

The work program encompasses detailed mineralogical characterisation, measurement of exchangeable REE fractions, evaluation of REE selectivity and mobility, and assessment of desorption kinetics. The outcomes will support a deeper understanding of the mineralisation and help optimise potential extraction pathways for rare earth recovery.

Next Steps

Resource delineation drilling will continue at the Bald Hill and Naked Hill Prospects, with outcomes from each campaign informing and refining subsequent drilling strategies. Concurrently, integrated mineralogical characterisation and hydrometallurgical testing will advance the assessment of targeted REE extraction pathways and processing efficiencies. Regional exploration activities across the East Salinas tenements and Enova's broader Brazilian project portfolio will also progress, with significant results and developments reported as they are received and interpreted.

Tenements/permits

The East Salinas tenements are currently held by Enova Brasil Ltda and registered in the state of Minas Gerai. Details of the East Salinas tenements are outlined in Table 3 and Figure 6.

EAST SALINAS				
Area	**Licence ID**	**Area (Ha)**	**Status**	**Ownership**
1	832387/2023	1910.49	Granted	ENOVA BRASIL LTDA
2	832388/2023	1979.56	Granted	ENOVA BRASIL LTDA
3	832389/2023	1962.31	Granted	ENOVA BRASIL LTDA
4	832390/2023	1984.08	Granted	ENOVA BRASIL LTDA
5	832391/2023	1953.79	Granted	ENOVA BRASIL LTDA
6	832392/2023	1978.33	Granted	ENOVA BRASIL LTDA
7	832393/2023	1920.77	Granted	ENOVA BRASIL LTDA
8	832394/2023	1970.01	Granted	ENOVA BRASIL LTDA
9	832395/2023	1984.91	Granted	ENOVA BRASIL LTDA
10	832396/2023	1266.88	Granted	ENOVA BRASIL LTDA
11	832397/2023	1824.34	Granted	ENOVA BRASIL LTDA
12	832398/2023	1971.13	Granted	ENOVA BRASIL LTDA

Table 4: East Salinas Project tenements Minas Gerais, Brazil

For personal use only

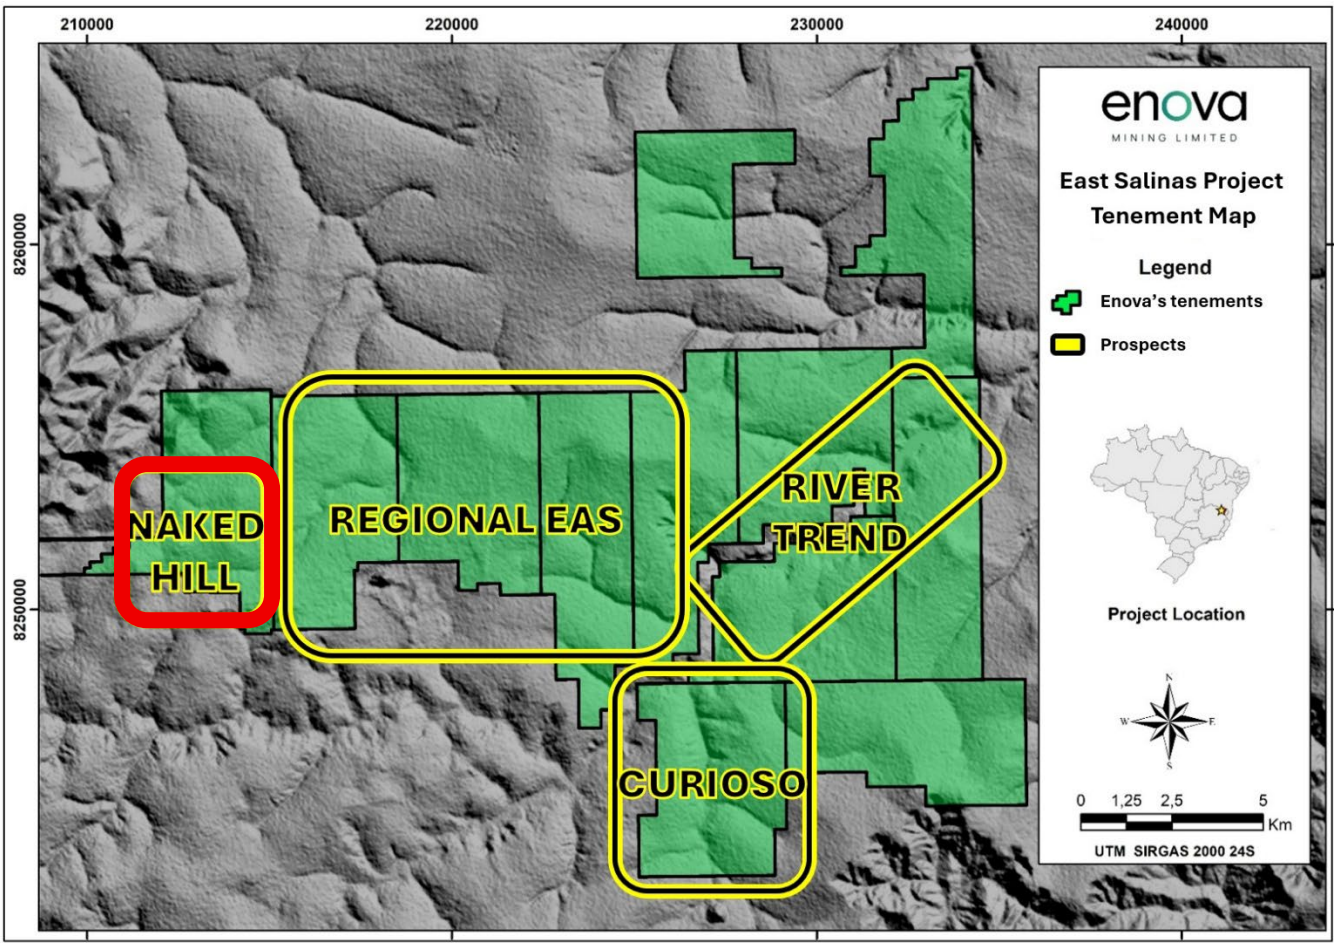


Figure 6: The Naked Hill project and regional targets in East Salinas tenement package

Brazil: A tier-one mining jurisdiction supporting long-term growth

Brazil offers a stable, low-risk environment for mining investment, underpinned by a well-established and globally competitive resources sector. As a top exporter of iron ore, gold, bauxite, lithium, REE and more, Brazil and particularly the states of Minas Gerais and São Paulo, recognise mining as a cornerstone of economic development.

The country boasts investor-friendly policies, with no government ownership mandates, minimal interference, and a progressive regulatory framework encouraging exploration and new project development. Brazil's attractive cost structure, highly skilled workforce, advanced mining services sector, and robust infrastructure including proximity to key cities further enhance its status as a prime destination for resource investment.

For personal use only

Disclosure

Enova has an extensive portfolio of tenements and advanced projects. Resources and focus are prioritised to meet project demands. Enova is currently working on several projects, at different stages of development.

The market will be kept appraised of developments, as required under ASX Listing Rules and in accord with continuous disclosure requirements.

ENDS

The announcement was authorised for release by the Board of Enova Mining Limited.

For more information, please contact:

Eric Vesel
Enova Mining Limited
CEO / Executive Director
eric@enovamining.com

Kristin Rowe
NWR Communications
kristin@nwrcommunications.com.au

For personal use only

About Enova Mining

Enova Mining is a critical minerals exploration and development company with a strategic portfolio of projects across Brazil and Australia, targeting the growing global demand for rare earth elements and battery metals.

The Company's key projects include:

- **The Coda Group of Projects** – prospective for clay-hosted rare earth elements (REE), scandium, titanium and gallium.
- **The Poços de Caldas Project** – a promising ionic adsorption clay REE opportunity.
- **The Charley Creek Project** – prospective for alluvial rare earths and scandium in the underlaying saprolite
- **The Lithium Valley Projects** – including East Salinas, Caraí, Santo Antônio do Jacinto, and Resplendor, all considered prospective for lithium and rare earth elements.

Enova is focused on advancing these high-potential assets through systematic exploration and development to support the global transition to clean energy technologies.

East Salinas Medina Intrusive Complex: A promising rare earth element (REE) discovery in Minas Gerais

- **Emerging High-Grade REE Opportunity:** The East Salinas Granitic Complex, situated within the East Brasiliano Orogen in northern Minas Gerais, has revealed highly anomalous surface geochemical results, with Total Rare Earth Oxides (**TREO**) grades reaching up to 2.17%. The project also boasts exceptionally high magnetic rare earth content, with NdPr (neodymium + praseodymium) oxide ratio reaching up to 38.8%, an average Heavy Rare Earth Oxide (**HREO**) ratio around 9.95% and average ytterbium oxide content around 387ppm. These results strongly support the presence of REE-bearing saprolite, granite and leucogranite units, confirming the potential for high-grade REE mineralisation across the project area.

- **Expanding Enova's Strategic Footprint:** East Salinas complements Enova's REE exploration portfolio alongside Juquiá, CODA North, and CODA Central. The project's large-scale tenement coverage and its association with post-collisional granites present multiple zones of interest, including the Bald Hill and Naked Hill targets, supporting further subsurface investigations and resource delineation.
- **Multi-Metal Potential and Geological Richness:** In addition to REEs, East Salinas shows elevated levels of neodymium, niobium, and other high-value elements linked with evolved granitic systems. This opens potential for valuable by-products and broader resource development across the tenement package.
- **Leveraging Brazilian Expertise for Efficient Advancement:** Enova's Brazilian geology team has been instrumental in advancing exploration at East Salinas through detailed mapping, systematic sampling, and field validation. Their expertise ensures efficient progression from surface sampling to future drilling and geophysical surveys.
- **Cost-Conscious Exploration with Strong Growth Potential:** Enova is adopting a disciplined, scalable exploration strategy at East Salinas focused on high-impact outcomes. With significant upside and a large tenement footprint, the project stands out as a cost-effective and potentially transformative REE discovery within Brazil's resource-rich landscape.

The East Salinas project underscores Enova's commitment to building a world-class REE and critical minerals portfolio, combining local geological strength with global technical knowledge to accelerate growth and shareholder value.

Competent person statement

The information related to Exploration Targets and Exploration Results is based on data compiled by Subhajit Deb Roy, a Competent Person and Chartered Member of The Australasian Institute of Mining and Metallurgy. Mr Deb Roy is currently working as Exploration Manager with Enova Mining. Subhajit has sufficient experience that is relevant to the style of mineralisation and type of deposits under consideration and to the activity being undertaken to qualify as a Competent Person is defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Subhajit consents to the inclusion in presenting the matters based on his information in the form.

Forward-looking statements

This announcement contains forward-looking statements which involve several risks and uncertainties. These forward-looking statements are expressed in good faith and believed to have a reasonable basis. These statements reflect current expectations, intentions or strategies regarding the future and assumptions based on currently available information. Should one or more of the risks or uncertainties materialise, or should underlying assumptions prove incorrect, actual results may vary from the expectations, intentions and strategies described in this announcement. No obligation is assumed to update forward looking statements if these beliefs, opinions and estimates should change or to reflect other future developments.

Precautionary statement

The exploration results for the East Salinas Project are preliminary in nature and based on surface geochemical sampling, mapping, and early-stage geological interpretation. While initial data indicate the presence of anomalous mineralisation, there has been insufficient exploration to define a Mineral Resource, and it is uncertain if further exploration will result in the delineation of a Mineral Resource. All forward-looking statements, including plans for future exploration and drilling, are subject to various risks, uncertainties, and assumptions. Investors are cautioned not to place undue reliance on these early results, as actual outcomes may differ materially from those anticipated. Resource estimates remain speculative and subject to revision.

Disclaimer

This ASX announcement (Announcement) has been prepared by Enova Mining Limited ("Enova" or "the Company"). It should not be considered as an offer or invitation to subscribe for or purchase any securities in the Company or as an inducement to make an offer or invitation with respect to those securities. No agreement to subscribe for securities in the Company will be entered into on the basis of this Announcement.

This Announcement contains summary information about Enova, its subsidiaries, and their activities, which is current as at the date of this Announcement. The information in this Announcement is of a general nature and does not purport to be complete nor does it contain all the information which a prospective investor may require in evaluating a possible investment in Enova.

For personal use only

By its very nature exploration for minerals is a high-risk business and is not suitable for certain investors. Enova's securities are speculative. Potential investors should consult their stockbroker or financial advisor. There are many risks, both specific to Enova and of a general nature which may affect the future operating and financial performance of Enova and the value of an investment in Enova including but not limited to economic conditions, stock market fluctuations, commodity price movements, regional infrastructure constraints, timing of approvals from relevant authorities, regulatory risks, operational risks and reliance on key personnel.

Certain statements contained in this announcement, including information as to the future financial or operating performance of Enova and its projects, are forward-looking statements that: may include, among other things, statements regarding targets, estimates and assumptions in respect of mineral reserves and mineral resources and anticipated grades and recovery rates, production and prices, recovery costs and results, capital expenditures, and are or may be based on assumptions and estimates related to future technical, economic, market, political, social and other conditions; are necessarily based upon a number of estimates and assumptions that, while considered reasonable by Enova, are inherently subject to significant technical, business, economic, competitive, political and social uncertainties and contingencies; and, involve known and unknown risks and uncertainties that could cause actual events or results to differ materially from estimated or anticipated events or results reflected in such forward-looking statements.

Enova disclaims any intent or obligation to update publicly any forward-looking statements, whether because of new information, future events, or results or otherwise. The words 'believe', 'expect', 'anticipate', 'indicate', 'contemplate', 'target', 'plan', 'intends', 'continue', 'budget', 'estimate', 'may', 'will', 'schedule' and similar expressions identify forward-looking statements. All forward-looking statements made in this announcement are qualified by the foregoing cautionary statements. Investors are cautioned that forward-looking statements are not guarantee of future performance and accordingly investors are cautioned not to put undue reliance on forward-looking statements due to the inherent uncertainty therein. No verification: although all reasonable care has been undertaken to ensure that the facts and opinions given in this Announcement are accurate, the information provided in this Announcement has not been independently verified

For personal use only

Appendix A: References:

1. SGB (Geological Survey of Brazil) Reference
   https://rigeo.sgb.gov.br/jspui/bitstream/doc/8650/35/Mapa_Curral%20De%20Dentro.pdflo
2. SGB (Geological Survey of Brazil) Reference
   https://rigeo.sgb.gov.br/bitstream/doc/8650/3/Relatório_Candido_Sales.pdf
3. ASX announcements
   a. *10 Feb 2025: Discovery of surface ionic adsorption REE mineralisation at East Salinas*
   b. *9 April 2026: High-Grade REE Intercepts Confirm IAC Mineralisation at East Salinas Brazil*
   c. *18 May 2026; Enova Appoints Ree Discovery Expert Alexandre Da Rocha to Support East Salinas Development*
   d. *20 May 2026: Further Auger REE Results Extend IAC REE Mineralisation at East Salinas, Brazil*
   e. *15 June 2026: Discovery of New REE Prospect Extends East Salinas Footprint*
   f. *27 July 2026: Resource Delineation Drilling Commences at Naked Hill REE Project, Brazil*

The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement.

Abbreviations & Legend

CREO = Critical Rare Earth Element Oxide	**NdPr% = Percentage amount of neodymium and**
HREO = Heavy Rare Earth Element Oxide Table	**praseodymium oxides as a proportion of the total**
IAC = Ionic Adsorption Clay	**amount of rare earth oxide (TREO)**
LREO = Light Rare Earth Element Oxide	**DyTb = Dysprosium-Terbium ppm**
REE = Rare Earth Element	**wt% = Weight percent**
REO = Rare Earth Element Oxide	**CN= Chondrite Normalised**
TREO = Total Rare Earth Element Oxides including	**SAP= Saprolite**
Yttrium Oxide	**SRK= Saprock**
AMSUL=Ammonium Sulphate	**FRK= Fresh Rock**
HREE (+Y) = Heavy Rare Earth Elements (+Yttrium)	**TQC= Tertiary Quaternary Cover**

Legend

Colour	TREO including Y_2O_3
	≥3,000 ppm
	≥2000 ppm
	≥1000 ppm
	<1000 ppm
0% --- 60%	**Recovery %**
	**Graded Colour Scale**

For personal use only