For personal use only

STRONG TIN INTERCEPTS CONTINUE FROM RESOURCE EXPANSION DRILLING AT TALLEBUNG

- Final assay results from the remaining 6 of the 25 holes completed in the Resource Expansion RC Drilling Program for a total of 4,759m show additional strong, broad tin mineralisation; results include;

  TBRC071: **7m @ 0.35% Tin & 25.8g/t Silver from 29m.**
  17m @ 0.36% Tin & 24.8g/t Silver from 164m, including;
  4m @ 1.02% Tin & 86.9g/t Silver from 176m.

  TBRC068: **12m @ 0.27% Tin & 79.1g/t Silver from 106m**, including;
  3m @ 0.72% Tin & 163g/t Silver from 84m

  TBRC070: **28m @ 0.18% Tin from 70m**, including;
  2m @ 0.91% Tin & 42.6g/t Silver from 84m

- Assays are pending for the diamond drilling component of 4 holes for a total of 947.8m of the Resource Expansion Program. These results are expected in the coming weeks.
- On receipt of all the remaining assays, these new results will be included in an updated MRE, with a target to **substantially increase the maiden MRE of 10.2Mt @ 0.18% Tin** at a 0.10% Tin cutoff*.
- Drilling is aimed at increasing the size and confidence of the resource to allow for Mine Scoping Studies to be completed on a 'critical mass' resource.

The Board of Sky Metals Limited ('SKY' or 'The Company') is pleased to announce the final results from the RC drilling resource expansion and infill program at the Tallebung Project.

TALLEBUNG PROJECT (EL 6699, SKY 100%)

RESOURCE EXTENSION AND INFILL RC DRILLING

The final assay results from the RC drilling have been received for holes **TBRC066-71** and include the multiple new tin intercepts showing additional areas of tin mineralisation to be included in an updated MRE.

SKY CEO Oliver Davies commented: *"SKY is continuing to successfully discover tin mineralisation outside of the maiden Exploration Target footprint and MRE. These new results also show the growing continuity of the tin mineralisation at Tallebung. SKY looks forward to updating the MRE for the Tallebung Project with these new results and advancing this promising project towards a 'critical mass' to announce mine scoping studies for the Tallebung Tin Project."*

* For further details on the maiden MRE for the Tallebung Tin Project please see SKY ASX Announcement 22 March 2023.

For personal use only

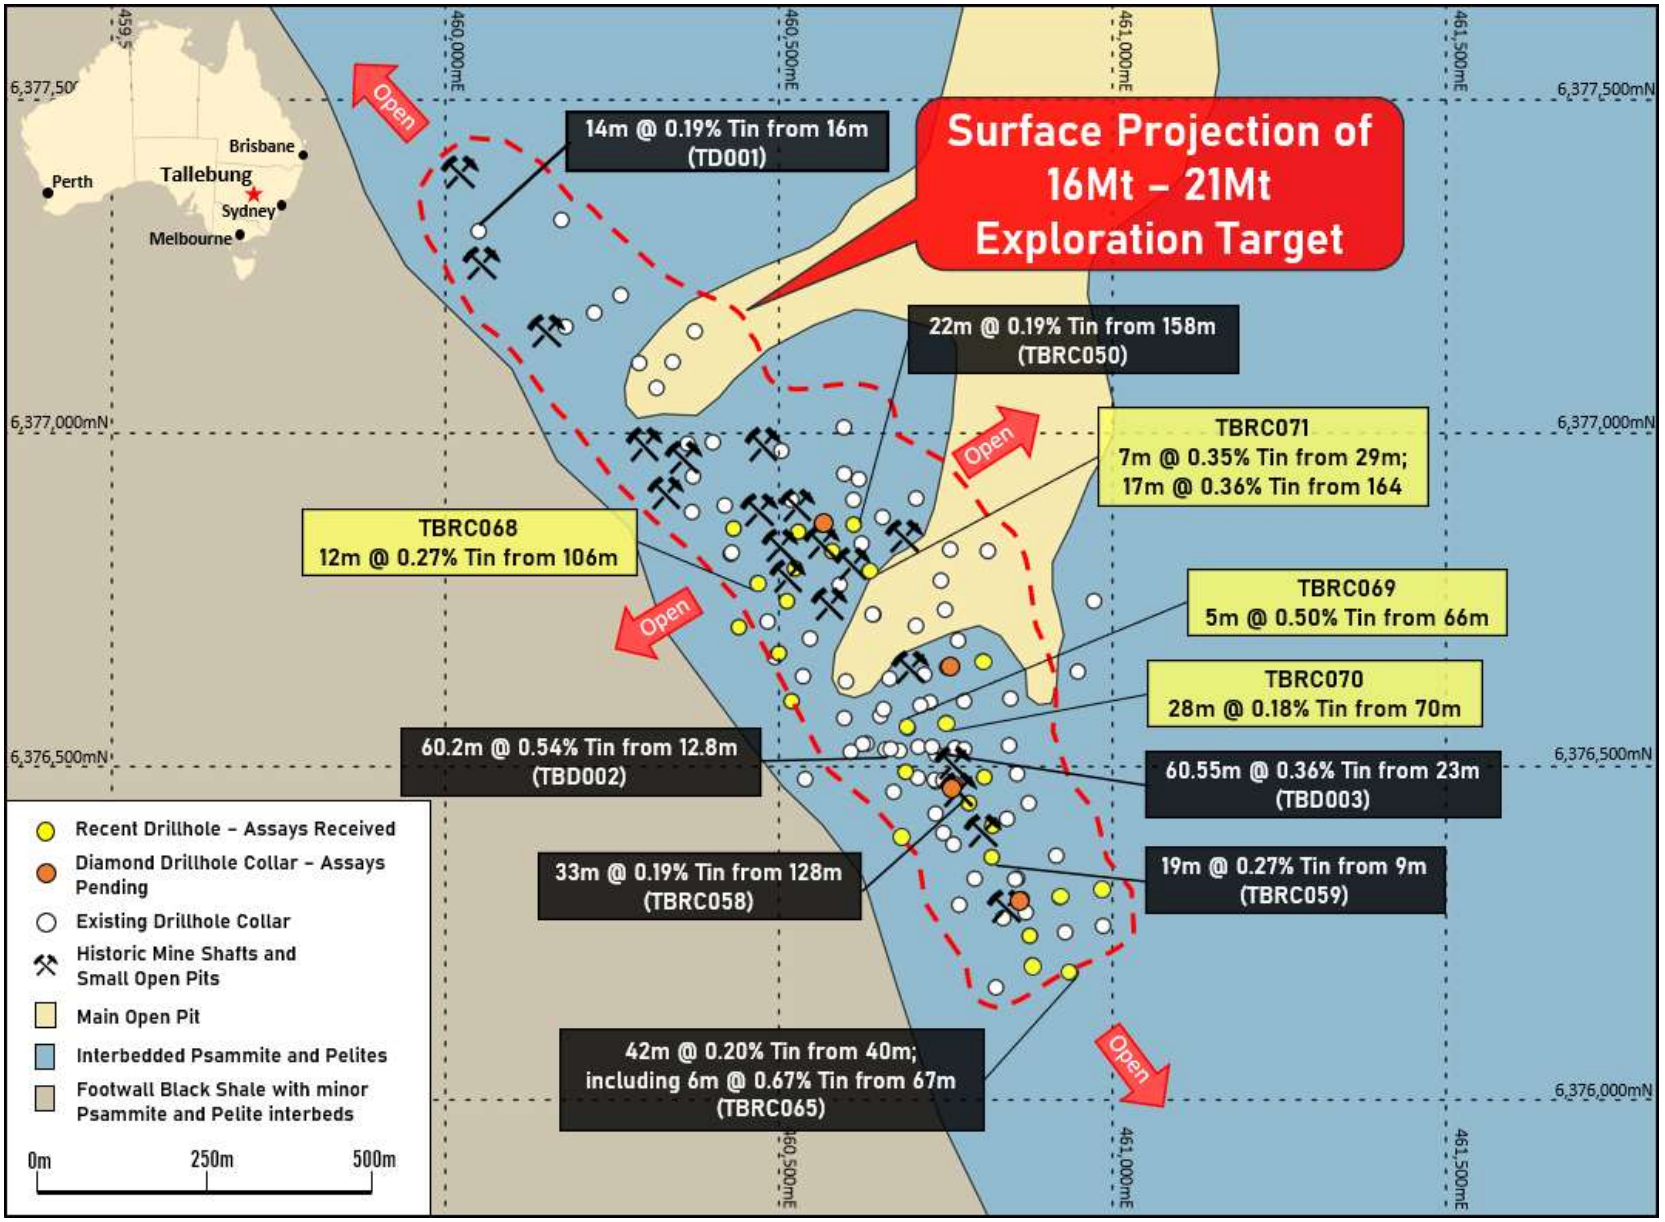

Figure 1: *Tallebung Tin Project – Plan showing extent of the current Exploration Target along with locations of recently completed holes in the resource expansion and infill drilling program, overlaid on the geological map. New assays are in yellow.*

The first hole in this batch, **TBRC066,** was drilled on the southwestern margin of Exploration Target footprint and intercepted reduced tin mineralisation, demonstrating that tin mineralisation remains open at Tallebung, results included:

TBRC066: 2m @ 0.11% Tin & 0.06% Tungsten from 4m.

TBRC067 was then drilled on the eastern margin of exploration target footprint and also intercepted reduced tin mineralisation, however, as in **TBRC066**, demonstrates that tin mineralisation remains open at Tallebung, results included:

TBRC067: 8m @ 0.12% Tin from 112m, including;
1m @ 0.73% Tin from 115m.

These results will be followed up to see if this new mineralisation can be traced into more favourable stratigraphic horizons where the tin mineralisation may increase in grade and width.

The next hole in the program, **TBRC068**, was drilled on the central-western margin of the Exploration Target footprint to follow up on the prospective intercepts and stratigraphy in **TBRC054** and look for further extensions to the tin mineralisation. **TBRC068** successfully intercepted strong, broad tin mineralisation and significantly extended the footprint of Tallebung substantially to the west, results included:

TBRC068: **12m @ 0.27% Tin, 0.10% Tungsten & 79.1g/t Silver from 106m**, including;
3m @ 0.72% Tin, 163g/t Silver, 0.14% Copper & 1.49% Zinc from 111m.

Two holes, **TBRC069** & **TBRC070** were drilled near the high-grade tin mineralisation discovered with **TBD002** and **TBD003** (**60.2m @ 0.54% Tin from 12.8m** and **60.55m @ 0.36% Tin from 23m**, respectively) to further extend these strong tin intercepts, results included:

TBRC069: **5m @ 0.50% Tin, 0.06% Tungsten, 109g/t Silver & 1.91% Copper from 106m**,
including; **1m @ 2.15% Tin, 0.08% Tungsten, 477g/t Silver & 8.56% Copper from 111m**.

TBRC070: **28m @ 0.18% Tin from 70m**, including;
2m @ 0.91% Tin, 0.04% Tungsten & 42.6g/t Silver from 84m.

Finally, the last RC drillhole in the program, **TBRC071**, was on the edge of the southern lead open pit to extend tin mineralisation to the east. **TBRC071** intercepted multiple zones of strong tin, also significantly extending the tin mineralisation, results included:

TBRC071: **7m @ 0.35% Tin & 25.8g/t Silver from 29m**,
17m @ 0.36% Tin & 24.8g/t Silver from 164m, including;
4m @ 1.02% Tin, 86.9g/t Silver, 0.08% Copper & 2.61% Zinc from 174m.

These final results from the RC drilling program have successfully intercepted further tin mineralisation at Tallebung. SKY now eagerly anticipates the assay results for the diamond drilling component for the Resource Expansion Drilling program to be received in the coming weeks to then be used in an updated MRE.

FUTURE WORK PROGRAM

All assays for the RC drilling component of the resource expansion program have now been received and on receipt of the diamond drilling assay results these new results will be added to estimate a new Mineral Resource Estimate (MRE). This will aim to increase SKY's maiden MRE of 10.2Mt @ 0.18% Tin for 18.4kt at a 0.10% Tin cut-off grade and convert the estimated Exploration Target of **16 – 21Mt at a grade ranging between 0.16 - 0.20 % tin** at 0.1% Tin cut-off, into additional resources (SKY ASX Announcement 22 March 2023).

For personal use only

Following the new estimate of the mineral resources at Tallebung, if required, SKY plans to undertake an additional drilling program to increase confidence in the resources, in particularly resources around high-grade areas such as those identified surrounding hole **TBD003** (60.55m @ 0.36% Tin from 23m), increasing the resource confidence in these areas to indicated resources. The surrounding resource is planned to be drilled to inferred resources and this aims to achieve a 'critical mass' for mine scoping studies to be undertaken and released.

***Table 1**: Tallebung Project – Drillhole Collar Details.*

Hole ID	Easting (MGA)	Northing (MGA)	RL (m)	DIP	Azimuth (MGA)	Total Depth (m)	Comments
TBRC066	460684	6376394	296	-60	255.4	198	Completed
TBRC067	460806	6376658	283.8	-60	260.4	174	Abandoned due to excessive water
TBRC068	460468	6376775	287.2	-60	250.4	192	Completed, hole extended past planned depth due to further mineralisation intercepted
TBRC069	460693	6376558	288.3	-60	260.4	192	Completed
TBRC070	460751	6376565	287.5	-60	260.4	198	Completed
TBRC071	460635	6376793	278	-60	250.4	192	Abandoned due to excessive water
TBD005	460751	6376650	284	-65	260	251.5	Completed; Assays Pending
TBD006	460863	6376298	294	-65	245	229.7	Completed; Assays Pending
TBD007	460763	6376474	294	-65	250	178.4	Completed; Assays Pending
TBD008	460553	6376856	296	-65	250	288.2	Completed; Assays Pending

***Table 2**: Tallebung Project – Significant Intercepts.*

Hole ID	From	To	Interval	Sn	W	Ag	Cu	Zn	Comments
	(m)	(m)	(m)	%	%	g/t	%	%	
TBRC066	4	6	2	0.11	0.06	-	-	-	
	84	85	1	0.25	-	10.9	-	-	
TBRC067	24	25	1	0.64	-	-	-	-	
	34	36	2	0.25	-	10.1	-	-	
	49	50	1	0.68	-	11	-	-	
	65	67	2	0.29	-	-	-	-	
	72	73	1	0.18	-	-	-	-	
	75	76	1	0.12	-	-	-	-	
	79	80	1	0.24	-	-	-	-	
	85	86	1	0.13	-	-	-	-	
	95	103	8	0.09	0.08	-	-	-	
including	101	102	1	0.29	0.58	-	-	-	Strong Tungsten intercept
	112	120	8	0.12	-	-	-	-	
including	115	116	1	0.73	-	-	-	-	
	133	135	2	0.15	-	14.8	-	-	
TBRC068	28	29	1	0.15	-	-	-	-	
	58	59	1	0.65	0.04	-	-	-	
	106	**118**	**12**	**0.27**	**0.10**	**79.1**	**0.06**	**0.69**	Strong Tungsten mineralisation
including	**111**	**114**	**3**	**0.72**	**-**	**163**	**0.14**	**1.49**	Substantial base metal mineralisation

For personal use only

Hole ID	From	To	Interval	Sn	W	Ag	Cu	Zn	Comment
	(m)	(m)	(m)	%	%	g/t	%	%	
	151	152	1	0.16	-	28.4	0.09	-	
	158	167	9	-	-	36.9	-	-	Strong Silver intercept
including	159	160	1	0.1	0.04	175	0.08	0.83	
TBRC069	18	19	1	0.26	-	40.9	-	-	
	58	59	1	0.35	-	-	-	-	
	66	**71**	**5**	**0.50**	**0.06**	**109**	**1.91**	-	
including	67	68	1	2.15	0.08	477	8.56	-	High-grade Copper mineralisation
	91	92	1	0.22	0.45	15.6	-	-	
	105	106	1	0.2	0.07	-	-	1.38	
	118	119	1	0.6	0.55	-	-	-	
	136	142	6	0.22	-	-	-	-	
including	140	141	1	0.73	-	-	-	-	
TBRC070	0	2	2	0.31	0.06	-	-	-	
	10	12	2	0.26	-	-	-	-	
	70	**98**	**28**	**0.18**	**-**	**-**	**-**	**-**	
including	**84**	**86**	**2**	**0.91**	**0.04**	**42.6**	**-**	**0.42**	
	107	108	1	0.75	0.05	84.2	0.07	1.56	High Silver and base metal intercept
	167	168	1	0.68	-	-	-	-	
TBRC071	**29**	**36**	**7**	**0.35**	**-**	**25.8**	-	-	
including	29	30	1	1.49	0.06	37.8	-	-	
	143	144	1	0.47	-	-	-	-	
	164	**181**	**17**	**0.36**	**-**	**24.8**	**-**	**0.81**	
including	**176**	**180**	**4**	**1.02**	**-**	**86.9**	**0.08**	**2.61**	High Silver and base metal intercept
	189	190	1	0.68	0.50	11.6	-	-	

For personal use only

This report has been approved for release by the Board of Directors.

ABOUT SKY (ASX: SKY)

SKY is an ASX listed public company focused on the exploration and development of high value mineral resources in Australia. SKY's project portfolio offers exposure to the tin, gold, and copper markets in the world class mining jurisdiction of NSW.

TIN PROJECTS

TALLEBUNG PROJECT (EL6699, 100% SKY)

The Tallebung Project is located ~70km north-west of Condobolin in central NSW. The project encompasses the historic Tallebung Tin Mining Field at the northern extent of the Wagga Tin Belt within the central Lachlan Orogen where SKY has now defined a maiden MRE of 10.2Mt @ 0.18% Tin*. SKY plans to advance the Tallebung by increasing the resource to the 16-21Mt* Exploration Target and progress development for future mining (*SKY ASX Announcement 22 March 2023).

DORADILLA PROJECT (EL6258, 100% SKY)

The Doradilla Project is located ~ 30km south of Bourke in north-western NSW and is a large and strategic REE and tin project with excellent potential for associated polymetallic mineralisation (tungsten, copper, bismuth, indium, nickel, cobalt).

NARRIAH PROJECT (EL9524, 100% SKY)

The Narriah Project is located ~70km west of West Wyalong in western NSW and represents a large tin project with multiple historic workings prospective for tin, tungsten and lithium mineralisation with limited drill testing completed to date.

NEW ENGLAND PROJECT (EL9200, 100% SKY)

The exploration licence in the New England Orogen covers areas of significant historical tin production.

COPPER GOLD PROJECTS

IRON DUKE (EL6064, EL9191 100% SKY)

The Iron Duke project is located ~10km south-east of Tottenham in central NSW and covers at least 4 significant historic copper-gold mines. High grade copper-gold mineralisation intersected by previous explorers (e.g. 13m @ 1.56% Cu & 4.48g/t Au).

GALWADGERE (EL6320, 100% SKY)

The Galwadgere project is located ~15km south-east of Wellington in central NSW. An open MRE of 3.6Mt @ 0.78% Cu and 0.28g/t Au defined at Galwadgere with numerous targets with limited drilling testing adjacent to the MRE.

GOLD PROJECTS

CULLARIN / KANGIARA projects (EL7954; EL8400 & EL8573, DVP JV)

The Cullarin Project contains equivalent host stratigraphy to the McPhillamys deposit with a similar geochemical, geophysical & alteration signature. 'McPhillamys-style' gold results from previous drilling at the Cullarin Project. SKY's maiden drill program was successful, including HUD002 which returned 93m @ 4.2 g/t Au from 56m.

CALEDONIAN / TIRRANA PROJECTS (EL8920, EL9048, EL9120 100% SKY)

Highlight, 'McPhillamys-style' gold results from previous exploration include 36m @ 1.2 g/t Au from 0m to EOH in drillhole LM2 and 81m @ 0.87g/t Au in a costean on EL8920 at the Caledonian Project.

Figure 2: *SKY Tenement Location Map*

For personal use only

Competent Persons Statement

The information in this report that relates to Exploration Results is based on information compiled by Mr. Oliver Davies, who is a Member of the Australasian Institute of Geoscientists. Mr. Oliver Davies is an employee of Sky Metals Ltd and has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves.' Mr. Davies consents to the inclusion in this report of the matters based on his information in the form and context in which it appears.

Previously Reported Information

The information in this report that references previously reported exploration results is extracted from the Company's ASX market announcements released on the date noted in the body of the text where that reference appears. The previous market announcements are available to view on the Company's website or on the ASX website (www. asx.com.au). The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcements. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcements.

Disclaimer

This report contains certain forward-looking statements and forecasts, including possible or assumed reserves and resources, production levels and rates, costs, prices, future performance or potential growth of Sky Metals Ltd, industry growth or other trend projections. Such statements are not a guarantee of future performance and involve unknown risks and uncertainties, as well as other factors which are beyond the control of Sky Metals Ltd. Actual results and developments may differ materially from those expressed or implied by these forward-looking statements depending on a variety of factors. Nothing in this report should be construed as either an offer to sell or a solicitation of an offer to buy or sell securities.

This document has been prepared in accordance with the requirements of Australian securities laws, which may differ from the requirements of United States and other country securities laws. Unless otherwise indicated, all ore reserve and mineral resource estimates included or incorporated by reference in this document have been, and will be, prepared in accordance with the JORC classification system of the Australasian Institute of Mining, and Metallurgy and Australian Institute of Geoscientists.

For personal use only

For personal use only

JORC CODE, 2012 - TABLE 1

Section 1 Sampling Techniques and Data – TALLEBUNG PROJECT

(Criteria in this section apply to all succeeding sections)

Criteria	Explanation	Commentary
Sampling techniques	• *Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as downhole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.*	• Drill core sampling is by sawn quarter core PQ & half core HQ core. Nominal sample intervals are 1m with a range from 0.3m to 2.0m. • RC Drilling – the total sample (~20-30kg) is delivered via cyclone into a large plastic bag which is retained for future use if required. 1m intervals are split using a cone splitter on the rig into a separate calico at the time of drilling.
	• *Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.*	For RC drilling, assay standards or blanks are inserted at least every 50 samples. For diamond drilling standards are insert every 30-50 samples. All sample lab received weights show consistency with core recovery and interval length.
	• *Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.*	Each sample was dried, crushed and pulverised as per standard industry practice. RC Drilling – the total sample (~20-30kg) is delivered via cyclone into a large plastic bag which is retained for future use if required. 1m intervals are split using a cone splitter on the rig into a separate calico at the time of drilling. Where mineralisation has not been logged, 4m composites have been made by using a spear to combine equal amounts of samples from each 1m calico. The primary metal of interest, tin (Sn) and also tungsten (W) were determined by lithium borate fusion XRF (method GE_IMS92A50 and GE_ICP92A50) – considered appropriate for these elements. Multielement assaying was completed for 48 elements by 0.25g four-acid digest with ICPMS determination (method GE_IMS40Q20 and GE_ICP40Q20).
Drilling techniques	• *Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc)*	Reverse circulation (RC) drilling using 110mm rods, 144mm face sampling hammer.
Drill sample recovery	• *Method of recording and assessing core and chip sample recoveries and results assessed.* • *Measures taken to maximise sample recovery and ensure representative nature of the samples.* • *Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material*	RC drilling - high capacity RC rig was used to enable dry samples collected. Drill cyclone is cleaned between rod changes and after each hole to minimise cross-hole contamination. Sample weights are recorded for each sample. Recoveries were generally excellent and consistent, however, if samples were wet the recoveries were less consistent. There is no known relationship between sample recovery and grade. Where samples recoveries are less than 95% there is no relationship observed between grade and sample recovery. Relationships between sample recovery and grade are not considered significant where recoveries exceeded 95% in fresh rock.

For personal use only

Criteria	Explanation	Commentary
Logging	• *Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies* • *Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography* • *The total length and percentage of the relevant intersections logged*	Systematic geological and geotechnical logging was undertaken when the holes were originally drilled. Data collected includes: • Nature and extent of lithologies. • Relationship between lithologies. • Amount and mode of occurrence of ore minerals. • Location, extent, and nature of structures such as bedding, cleavage, veins, faults etc. Structural data (alpha & beta) are recorded for orientated core. Geotechnical data such as recovery, RQD, fracture frequency, qualitative IRS, microfractures, veinlets and number of defect sets. For some geotechnical holes the orientation, nature of defects and defect fill are recorded. Both qualitative and quantitative data is collected. RC chips, half core (HQ) & ¾ core (PQ) samples are retained in trays for future reference. A representative sample of each one metre RC interval is retained in chip trays for future reference. All chips were geologically logged.
Sub-sampling techniques and sample preparation	• *If core, whether cut or sawn and whether quarter, half or all core taken* • *If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry* • *For all sample types, the nature, quality and appropriateness of the sample preparation technique* • *Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples* • *Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.* • *Whether sample sizes are appropriate to the grain size of the material being sampled*	RC drilling - the total sample (~20-30kg) is delivered via cyclone into a large plastic bag which is retained for future use if required. 1m intervals are split using a cone splitter on the rig into a separate calico at the time of drilling. Where 4m composites have been made, a spear is used to split equal amounts of each metre into the 4m composite. Samples were dried crushed and pulverised to 90% passing 75 microns. This is considered to appropriately homogenise the sample to allow subsampling for the various assay techniques. SKY: Certified Reference Material (CRM) and blanks were inserted at least every 50 samples to assess the accuracy and reproducibility of the drill core results. The results of the standards were to be within ±10% variance from known certified result. If greater than 10% variance the standard and up to 10 samples each side were re-assayed. SGS conducted internal check samples every 20 for multielement assay. RC drilling - duplicate samples are collected of re-split intervals. Duplicates generally show excellent repeatability. Sample sizes are industry standard and considered appropriate
Quality of assay data and laboratory tests	• The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total • For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc • Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established	Standard assay procedures performed by a reputable assay lab, (SGS), were undertaken. Forty-eight elements Ag, As, Cu, Fe, Pb, S, Zn are digested by four-acid digest then analysed by ICPMS (method GE_IMS40Q20 and GE_ICP40Q20). Sn and W assays were generated by lithium borate fusion XRF (method GE_IMS92A50 and GE_ICP92A50) – considered appropriate for these elements. No geophysical tools were used in the determination of assay results. Certified reference material or blanks were inserted at least every 50 samples. Standards are purchased

For personal use only

Criteria	Explanation	Commentary
		from Certified Reference Material manufacture companies: Standards were purchased in foil lined packets of between 60g and 100g. Different reference materials were used to cover high grade, medium grade, low grade, and trace ranges of elements, with a primary focus on Sn and Cu.
Verification of sampling and assaying	• *The verification of significant intersections by either independent or alternative company personnel.* • *The use of twinned holes.* • *Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.* • *Discuss any adjustment to assay data*	Drill data is compiled and collated and reviewed by senior staff. External consultants do not routinely verify exploration data until resource estimation procedures are deemed necessary. The intersection calculations were viewed by >1 geological personnel. Twinned holes have been used by past explorers to validate the results achieved and have confirmed these historic results. Drill Hole Data including: meta data, any gear left in the drill hole, lithological, mineral, survey, sampling, magnetic susceptibility was collected and stored as physical and electronic copies or entered directly into an excel spread sheet using drop down codes. When complete the spreadsheet was combined into a master excel spreadsheet as the drill hole database. Assay data was provided by SGS via .csv spreadsheets. The data was validated using the results received from the known certified reference material. Hard copies of the assay certificates were stored with drill hole data such as drillers plods, invoices, and hole planning documents. Assay data is not adjusted.
Location of data points	• *Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.* • *Specification of the grid system used* • *Quality and adequacy of topographic control*	Historic drill hole collars were located using either a licenced surveyor or on a local imperial or metric grid. Conversion of the local grid co-ordinates has been undertaken by previous exploration companies. SKY has used DGPS surveying of drillholes (± 0.1m) to accurately locate them. All coordinates are based on Map Grid Australia Zone 55E, Geodetic Datum of Australia 1994. Historic drill hole collars were located using either a licenced surveyor or on a local imperial or metric grid. SKY has used DGPS surveying of drillholes (± 0.1m) to accurately locate them, or handheld GPS (+/- 3m). Where handheld GPS has been used SKY will DGPS them at a later date.
Data spacing and distribution	• *Data spacing for reporting of Exploration Results* • *Data spacing for reporting of Exploration Results Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied* • *Whether sample compositing has been applied*	At this early exploration stage, the data spacing is variable as the focus is on geological mapping and identifying new zones of mineralisation. The maiden MRE was estimated to inferred only and increases in resource confidence will require tighter spaced drilling in future programs. Sample compositing is not applied.
Orientation of data in relation to geological structure	• *Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type* • *If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced sampling bias, this should be assessed and reported if material*	Drilling was orientated to cross the mineralisation trend at moderate to high angles. The use of orientated core allows estimates of the true width and orientation of the mineralisation to be made. No sample bias due to drilling orientation is known. The structural controls on mineralisation is considered well understood and consistent.

For personal use only

Criteria	Explanation	Commentary
Sample security	• *The measures taken to ensure sample security*	Sample chain of custody has been managed by the employees of Sky Metals who commissioned the drilling and transport samples from the drilling rig to assay laboratory. All samples are bagged in tied numbered calico bags, grouped into larger tied polyweave bags, or placed in a stillage box and transported to SGS in Orange by SKY personnel. All sample submissions are documented via SGS tracking system and all assays are reported via email. Sample pulps are returned to site and stored for an appropriate length of time (minimum 3 years). The Company has in place protocols to ensure data security.
Audits or reviews	• *The results of any audits or reviews of sampling techniques and data*	The Company does not routinely have external consultants verify exploration data until resource estimation procedures are deemed necessary. Further details for the maiden MRE can be found in SKY ASX Announcement 22 Match 2023.

Section 2 Reporting of Exploration Results – TALLEBUNG PROJECT
(Criteria listed in the preceding section also apply to this section)

Criteria	Explanation	Commentary
Mineral tenement and land tenure status	• *Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.*	The Tallebung Project is described by NSW Exploration Licence 6699 The tenement is 100% owned by Stannum Pty Ltd, a 100% owned subsidiary of Big Sky Metals Pty Ltd and a 100% owned subsidiary of Sky Metals Ltd. The Tallebung tenement is overlain by Native Title Determination Application No NC12/1 (Federal Court No NSD 415/12). A determination of extinguished native title was received over a portion of the Tallebung Tin Field.
	• *The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area*	Stannum Pty Ltd have previously commenced a Right to Negotiate Process (RTN) with the claimant group with respect to Application No NC12/1 (Federal Court No NSD 415/12). These negotiations are ongoing and Stannum Pty Ltd resubmitted a Native Title Clearance report to the NSW Dept of Planning (June 2018). A determination of extinguished native title was received over a portion of the Tallebung Tin Field Stannum has also signed an access agreement with the Native Title Applicant for access to the entire lease upon cultural clearance.
Exploration done by other parties	• *Acknowledgment and appraisal of exploration by other parties*	The Tallebung Project area was subject to a large, modern scale alluvial/colluvial mining by the Tullebong Tin Syndicate in the period 1963-1972. The Tullebong Syndicate completed a program of 24 short diamond holes in 1968-69 designed to test the lode mineralisation at Tallebung. Pruessag completed a large-scale assessment of the alluvial tin deposits in 1984-85, including RC drilling, identifying the potential for a large, low grade alluvial deep lead. In recent exploration, YTC Resources (now Aurelia Metals Ltd) completed trenching, diamond drilling, aircore drilling of tailings, and resistivity geophysics (EH4) at the Tallebung tin field. YTC recognised the

For personal use only

Criteria	Explanation	Commentary
		continued potential for both shallow high grade, and large scale low-grade porphyry-style- tin mineralisation.
Geology	• *Deposit type, geological setting and style of mineralisation*	The Ordovician aged Tallebung Group sediments in the Tallebung Tin Field area outcrop as a sequence of weakly metamorphosed shales, siltstones, carbonaceous mudstones and minor quartz-rich sandstones. The rocks are tightly folded, striking NNW at around 330o with variable dips. The tin mineralisation is thought to be sourced from the Silurian-aged Erimeran granite, which outcrops 2km south of the Tallebung Tin Field. The Tallebung Tin Field represents a site of significant tin and tungsten production from high grade, quartz lodes and their associated alluvial and deep lead deposits. The field has been worked sporadically from the discovery of lode tin in the 1890's, through to the large-scale open cut mining of alluvial tin by the Tullabong Tin Syndicate in the period 1963 to 1971. The Tallebung Tin Field contains significant, tin bearing, unconsolidated sediments which are alluvial to elluvial in nature, poorly sorted and contain coarse bedrock fragments up to 15cm in a matrix of sandy/silty clay with some iron oxides and cemented layers. Sediment thickness varies from 5m to 36 metres. The east-trending, tin bearing leads and deep leads draining the Tallebung lode deposits are the dominant source of historic tin production from the field. The Tallebung site is now a large-scale derelict mining environment with approximate at least 1.6km strike of shallow open cuts, large scale tailings dam and decaying mine site housing and infrastructure. The tin and tungsten bearing quartz reefs are located on the western edge of the worked out alluvial open pits. The lodes form a well-developed quartz vein stock work zone extending for approximately at least 1.6km on a 330° trend. Thicker quartz lodes >0.5m have been selectively exploited in historic shafts and shallow open cuts along the trend.
Drill hole Information	• *A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:* - *easting and northing of the drill hole collar* - *elevation or RL (Reduced Level–elevation above sea level in metres) of the drill hole collar* - *dip and azimuth of the hole* - *down hole length and interception depth* - *hole length* • *If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.*	See body of announcement.
Data aggregation methods	• *In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.* • *Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.* • *The assumptions used for any reporting of metal equivalent values should be clearly stated*	Where reported, drilling results from the Tallebung Project have been length weighted. Grades greater than 500ppm Tin have been used to calculate intercepts. No high cut-off has been applied. Intercepts are length weighted with no cutting of grades. This may lead to elevation of intercept grades due to the presence of a narrow interval of high-grade material. Such high grade zones are reported as included intercepts inside the broader intercept. No metal equivalences quoted.

Criteria	Explanation	Commentary
Relationship between mineralisation widths and intercept lengths	• *These relationships are particularly important in the reporting of Exploration Results-* - *if the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.* - *if it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').*	At Tallebung, orientated drill core has been used to allow determination of orientation of structures and mineralisation. Lode orientation of the Tallebung is well constrained by previous drilling and outcrop. Drilling intercepts lodes at or very close to perpendicular and reported intercepts are therefore estimated true thickness.
Diagrams	• *Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.*	See body of announcement, and SKY ASX announcement 9 March 2020, SKY ASX announcement 22 September 2021, SKY ASX announcement 25 October 2021 SKY ASX announcement 17 January 2022, SKY ASX announcement 27 January 2022, SKY ASX announcement 7 March 2022, SKY ASX Announcement 27 June 2022, SKY ASX Announcement 22 March 2023 and SKY ASX Announcement 4 October 2023.
Balanced reporting	• *Not applicable as there are no Exploration Results reported as part of this statement.*	Not applicable as there are no Exploration Results reported as part of this statement.
Other substantive exploration data	• *Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples–size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.*	See body of announcement and SKY ASX announcement 5 September 2022, SKY ASX announcement 24 October 2022, SKY ASX Announcement 1 November 2022, SKY ASX Announcement 27 June 2022, SKY ASX Announcement 22 March 2023, SKY ASX Announcement 22 June 2023, SKY ASX Announcement 21 August 2023 and SKY ASX Announcement 4 October 2023.
Further work	• *The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).*	Further work is imminent to continue exploring the tenement and to further expand the MRE. See body of announcement, and SKY ASX announcement 9 March 2020, ASX announcement, 22 November 2018, SKY ASX announcement 4 September 2019, SKY ASX announcement 5 December 2019, SKY ASX Announcement 10 May 2022, SKY ASX Announcement 27 June 2022, 5 September 2022, SKY ASX announcement 24 October 2022, 1 November SKY ASX Announcement 2022, SKY ASX Announcement 22 March 2023, SKY ASX Announcement 22 June 2023, SKY ASX Announcement 21 August 2023 and SKY ASX Announcement 4 October 2023. .
	• *Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.*	See body of announcement, and ASX announcement, 22 November 2018, SKY ASX announcement 4 September 2019, SKY ASX announcement 5 December 2019, SKY ASX Announcement 10 May 2022 , 1 November SKY ASX Announcement 2022 SKY ASX Announcement 22 March 2023, SKY ASX Announcement 22 June 2023, SKY ASX Announcement 21 August 2023 and SKY ASX Announcement 4 October 2023.

For personal use only