

For personal use only



ASX Announcement

22 December 2023



Anomalous and High Grade Gold Assays (up to 11.95 g/t Au) Returned from Rock Chip Samples Collected Near Old Mine Workings at Forsayth

Australia United Mining Limited (“the Company” or “AYM”) is pleased to present results from mapping and rock chip sampling conducted over AYM’s tenements at Forsayth in North Queensland. Fifty-one gold mines and mineral occurrences are known to lie within the tenements held by AYM (EPM14998, ML3417, ML3418) (Figure 1). The bulk of the gold deposits around Forsayth are Early Devonian shear-hosted lodes that may have steep or shallow dipping orientation and often lie on kilometre scale structures.

Sampling and mapping of selected historical mine workings was conducted in October. Sampling of the gold bearing quartz reefs was conducted with the aim of identifying “open-pittable” gold resources that could supplement the ore being mined at the Ropewalk goldmine (ML3417). Mapping revealed a narrow (<2m wide) zone of quartz veining and shearing could be traced over 500m between the old Pinnacles and Homeward Bound mine workings (Figure 2). Composite rock chip samples were collected from outcrop, subcrop and mullock of quartz veins and lodes from the old workings. Sample descriptions and gold assays are provided in Table 1. High grade and anomalous gold results were received for samples collected from the Cardigan and Pinnacles historical workings (Figure 2) (Plates 1 and 2).

Samples were assayed by ALS Laboratories in Townsville by 50g charge fire assay only.

Further mapping and sampling of historical workings is planned for next quarter.

For personal use only

For personal use only

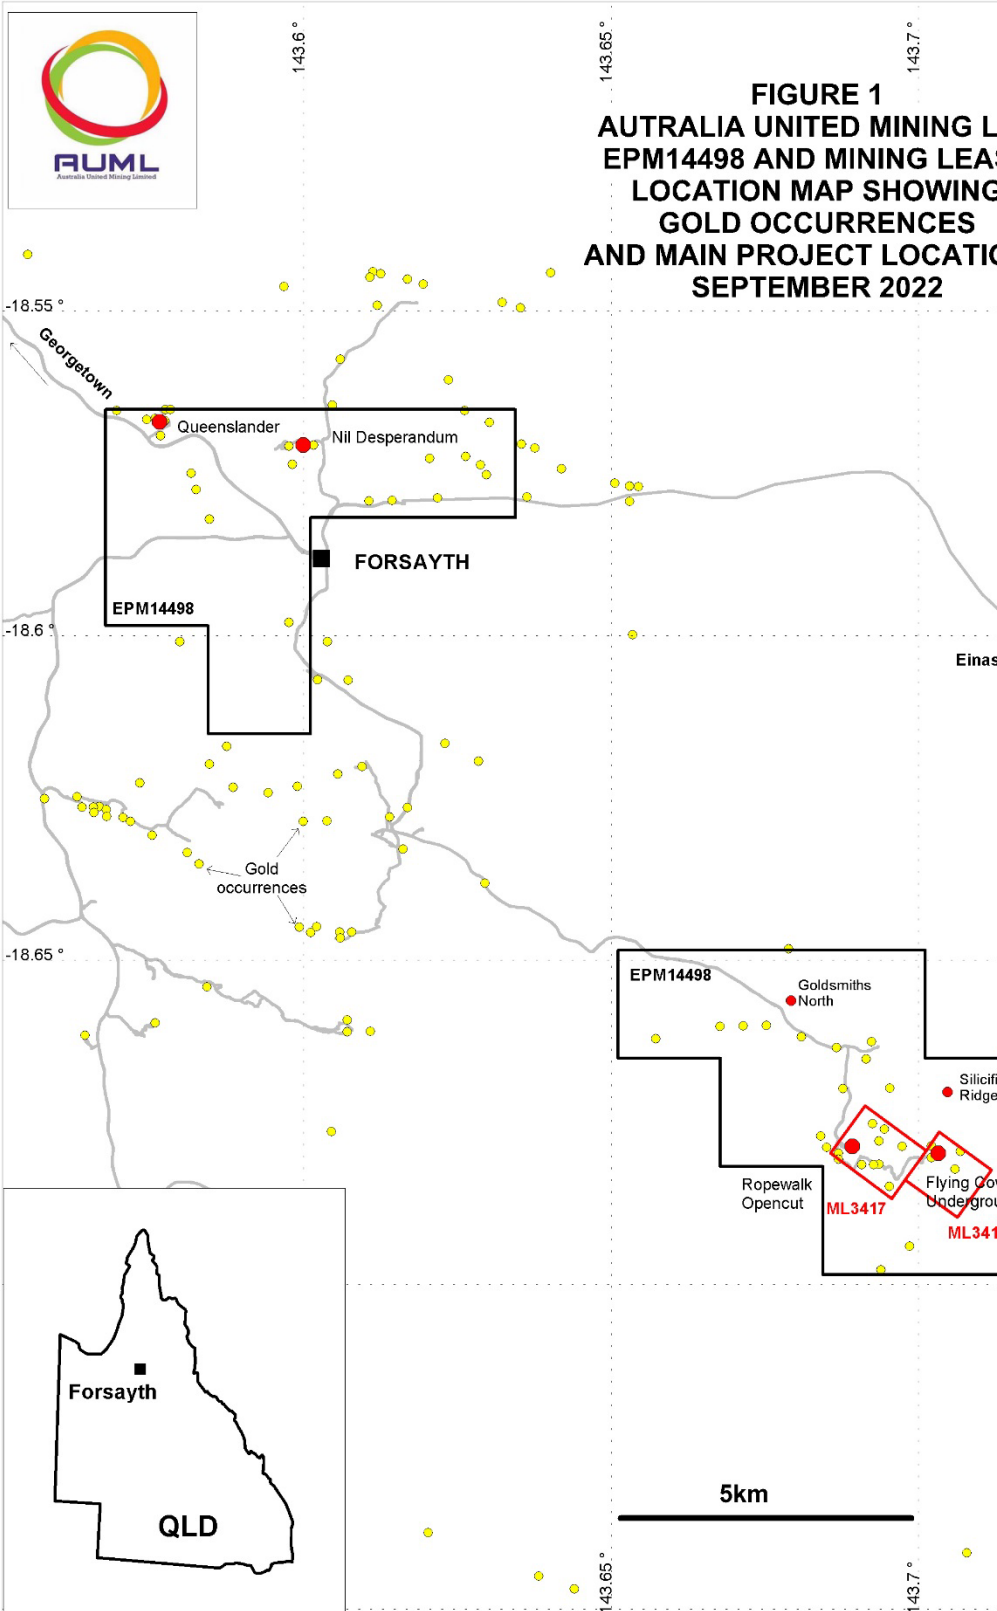




TABLE 1: ROCK CHIP SAMPLE LOCATIONS, DESCRIPTIONS AND GOLD ASSAYS

Prospect	Sample #	Easting	Northing	Gold ppm	Description
Cardigan	12838	777582	7944138	0.21	Sample from outcrop in shaft. Sheared, brecciated and silicified phyllite. Iron stained fractures.
Cardigan	12839	777582	7944133	0.07	Mullock from around shaft. Gossan, oxidised lode material. Vughy, siliceous framework with iron stained boxworks after sulphides.
Pinnacles	12840	777130	7944465	11.95	Mullock from west pit. Gossan composed of iron stained boxworks in a silica matrix.
Pinnacles	12841	777181	7944456	0.28	Mullock from around shaft. Massive, white, anhedral, buck quartz, recrystallised. Iron stained fractures and vughs. Minor (1%) pyrite crystals disseminated through quartz.
Homeward Bound	12842	777427	7944304	0.01	Subcrop from near old mine pits, composed of brecciated granodiorite cemented by limonite stained boxwork (gossan, after sulphides).

Samples were assayed for gold only by 50g charge fire assay (ALS Laboratories). Sample locations are in GDA'94 zone 54.

For personal use only

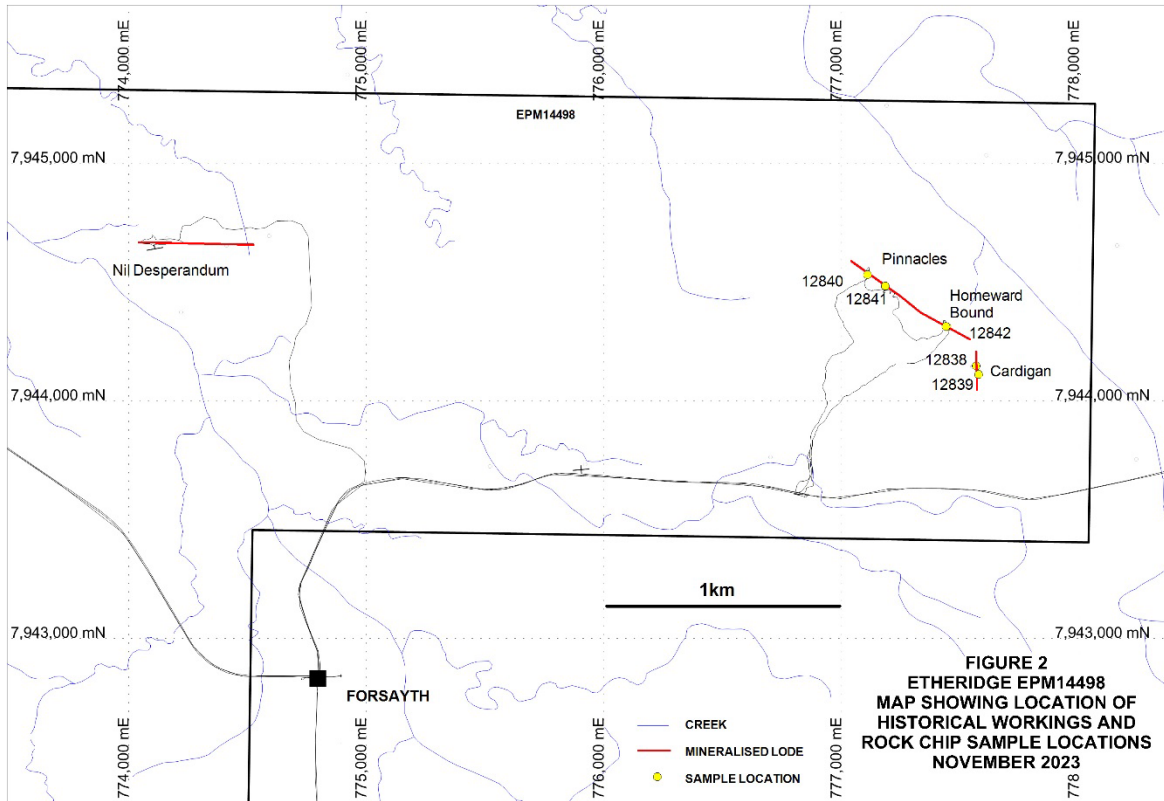




PLATE 1: Pinnacles workings, west pit. Site from which sample of gossanous quartz vein material was collected that assayed 11.95 g/t gold (sample 12840). See Plate 2.



PLATE 2: Sample 12840, of mullock from shallow pit west of the main Pinnacles workings, composed of vughy quartz vein material with limonite boxworks after sulphides (11.95 g/t gold).

For personal use only



Authorised by the Board,

A handwritten signature in black ink, appearing to read "Xiao Wang", is positioned above the name of the Managing Director.

Xiaojing Wang, Managing Director

Date: 22 December 2023

Competent person's statement

Information in this report relating to Exploration results, is based on information compiled by Mr Harry Mustard, an employee of Forsayth Resources and a member of AusIMM. Mr Mustard has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person under the 2012 Edition of the Australasian Code for reporting of Exploration Results Mineral Resources and Ore Reserves. Mr Mustard consents to the inclusion of the data in the form and context in which it appears.

For personal use only



JORC Code, 2012 Edition – Table 1 report template

Section 1 Sampling Techniques and Data (Forsayth Project EPM14498)

(Criteria in this section apply to all succeeding sections.)

For personal use only

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> A composite sample of mineralized outcrop, subcrop or mine mullock was collected aimed at getting a representative sample of the mineralization, as opposed to a single sample. Composite samples i.e. 3 to 5 fist sized pieces of rock were collected from an outcrop, subcrop or mullock. Samples were collected using a geological hammer and placed in a prenumbered calico bag for shipment to the laboratory for analysis. Approximately 2 to 3 kg of rock was collected in each sample.
Drilling techniques	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> No drilling was conducted
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between 	<ul style="list-style-type: none"> No drilling was conducted

Criteria	JORC Code explanation	Commentary
	<p><i>sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></p>	
Logging	<ul style="list-style-type: none"> • <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> • <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> • <i>The total length and percentage of the relevant intersections logged.</i> 	<ul style="list-style-type: none"> • A brief description of each rock chip sample was recorded at the time of sampling and later transferred to the database.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> • <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i> • <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> • <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i> • <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> • <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> • <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> • Samples were collected as a composite (3 – 5 fist sized pieces) of rock chips from each site weighing between 2 and 3 kilogrammes. All samples were analysed for gold only at ALS Laboratories, Townsville. Samples were prepared by pulverising a 250 gramme split to 85% passing minus 75 microns (ALS code CRU-21, PUL-31).
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> • <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> • <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> • <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i> 	<ul style="list-style-type: none"> • Sample Preparation and analysis was conducted through ALS Laboratories, Townsville, QLD. • Gold was determined by 50g fire assay with AAS finish (Code : Au-AA26). • Lab quality control procedures included insertion of blanks, standards and duplicates.
Verification of sampling and	<ul style="list-style-type: none"> • <i>The verification of significant intersections by either independent or alternative company personnel.</i> 	<ul style="list-style-type: none"> • Internal review of results was undertaken by company personnel. No independent verification undertaken.



For personal use only

Criteria	JORC Code explanation	Commentary
assaying	<ul style="list-style-type: none"> The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> As rock chip samples were collected descriptions of the geology, mineralization, sample number, GPS location were recorded in a sample booklet in the field. This data is entered into a geochemistry database (excel) and matched with assays when received.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> Sample locations were recorded using handheld GPS to +/- 5m accuracy. Coordinates were recorded in GDA'94 utm Zone 54. Topographic control was by GPS with ~10m accuracy.
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<ul style="list-style-type: none"> Composite samples were collected from an outcrop, subcrop or mine mullock. Sampling was undertaken at selected sites along the targeted lodes. Sampling was appropriate for this early stage of reconnaissance sampling.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> Sampling was focused on outcropping mineralization along the structures. Where outcrop could not be found, subcrop or mineralised mine mullock was selected to get an indication of the grade of mineralisation. Results will have a bias towards better grades of gold. However this is expected for reconnaissance style sampling aimed at identifying the "gold ore shoots" along the structure.
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<ul style="list-style-type: none"> Samples were taken directly to the ALS Lab in Townsville by the sampler.
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> No audits or reviews were undertaken due to the reconnaissance nature of exploration.



1.1 Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> The three tenements that make up the Forsayth project are EPM14998, ML3417 and ML3418. All tenements are 100% owned by AYM. In October 2020 AYM signed a co-operative agreement with Forsayth Resources P/L (Forsayth). Forsayth are managers of the project and are responsible for the exploration and mining within the AYM tenements. EPM14998, ML3417 and ML3418 are owned 100% by AYM. The tenements are in good standing and no known impediments exist.
<i>Exploration done by other parties</i>	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Numerous other companies have conducted exploration in the Forsayth district, namely Australian Gold Mining P/L, Petrogram P/L, Union Mining Ltd, Midapa P/L, Southern Crown P/L, Intermet Ltd, Castlegold P/L, Laneway Resources, Queensland Metal Corp.
<i>Geology</i>	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralization. 	<ul style="list-style-type: none"> Most of the gold deposits found in the Forsayth district are hosted in proterozoic age granite, gneiss or schist. The deposits are mainly shear-hosted quartz lodes in east to south-east trending faults. These “Plutonic” style deposits are Early Devonian in age and interpreted as syn-to late-deformational mineralisation localised in active structures above stocks that emanate from an underlying Silurian – Early Devonian batholith. Gold is hosted in basemetal sulphides, mainly galena and often possess high gold grades (>10 g/t), however deposits are typically small (<100, 000 tonnes).
<i>Drill hole Information</i>	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – 	<ul style="list-style-type: none"> No drilling was conducted

For personal use only

Criteria	JORC Code explanation	Commentary
	<p>elevation above sea level in metres) of the drill hole collar</p> <ul style="list-style-type: none"> o dip and azimuth of the hole o down hole length and interception depth o hole length. <p>• If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</p>	
Data aggregation methods	<ul style="list-style-type: none"> • In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> • AYM rock chip samples are reported as point results as received from the lab. No metal equivalents used.
Relationship between mineralization widths and intercept lengths	<ul style="list-style-type: none"> • These relationships are particularly important in the reporting of Exploration Results. 	<ul style="list-style-type: none"> • No drilling was conducted
	<ul style="list-style-type: none"> • If the geometry of the mineralization with respect to the drill hole angle is known, its nature should be reported. 	<ul style="list-style-type: none"> • No drilling was conducted
	<ul style="list-style-type: none"> • If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	<ul style="list-style-type: none"> • No drilling was conducted
Diagrams	<ul style="list-style-type: none"> • Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and 	<ul style="list-style-type: none"> • Refer to figures contained in this report

Criteria	JORC Code explanation	Commentary
	<i>appropriate sectional views.</i>	
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> All results are shown in figures and tables in the body of this report.
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> The bulk of the quartz lodes sampled are generally narrow (<2m), steeply dipping and tend to pinch and swell along their strike length.
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> The faults that host the mineralised lodes in the Forsayth district are often regional scale structures that can be traced on the ground continuously for more than 1km e.g. Canadian, Goldsmith, Mt Jack, Big Reef, Queenslander, Nil Desperandum. Further mapping and sampling along these structures is warranted. Refer to diagrams in body of report.