For personal use only

Patriot Drills 124.9 m at 1.72% Li_2O and 35.6 m at 3.78% Li_2O in Final Batch of CV5 Assays Ahead of Q3 Resource Update

June 24, 2024 – Vancouver, BC, Canada *June 25, 2024 – Sydney, Australia*

Highlights

- Continued strong lithium mineralization over wide intervals from infill drilling at the CV5 Deposit, within the district scale Corvette Property.
  - **124.9 m at 1.72% Li_2O**, including **13.4 m at 4.04% Li_2O** (CV24-473).
  - **135.7 m at 1.02% Li_2O**, including **44.7 m at 2.03% Li_2O** (CV24-410).
  - **112.7 m at 1.20% Li_2O**, including **21.7 m at 1.93% Li_2O** (CV24-503).
  - **116.1 m at 0.91% Li_2O**, including **11.8 m at 3.01% Li_2O** (CV24-447).
  - **95.1 m at 1.39% Li_2O**, including **33.3 m at 2.00% Li_2O** (CV24-409).
  - **93.5 m at 1.54% Li_2O**, and **29.2 m at 2.08% Li_2O** (CV24-386).
  - **91.0 m at 1.46% Li_2O**, including **13.3 m at 3.42% Li_2O** (CV24-415A).
  - **63.7 m at 2.68% Li_2O**, including **35.6 m at 3.78% Li_2O** (CV24-404).
- The program included six drill holes completed for geomechanical purposes to support pit design.
- The focus of the 2024 winter drilling at CV5 was to support an upgrade in Mineral Resource confidence, from the Inferred category to the Indicated category, targeting release in August 2024 inclusive of a maiden Mineral Resource for the CV13 discovery.
- Patriot remains on track to provide a Preliminary Economic Assessment to the market based upon the updated CV5 resource, with the Company targeting Q3 2024.
- **Results for 4,538 m (16 holes) remain to be reported** from the 2024 winter drill program – all from CV13 and including multiple step-out drill holes targeting the recently discovered/announced high-grade Vega Zone.

Patriot Battery Metals Inc. (the "Company" or "Patriot") (TSX: PMET) (ASX: PMT) (OTCQX: PMETF) (FSE: R9GA) is pleased to announce the final batch of core assay results from the CV5 Spodumene Pegmatite from its recently completed 2024 winter drill program at Corvette. The 100% owned Corvette Property (the "Property" or "Project") is located in the Eeyou Istchee James Bay region of Quebec. The CV5 Spodumene Pegmatite, with a maiden Mineral Resource Estimate ("MRE") of 109.2 Mt at 1.42% Li_2O Inferred[1], is situated approximately 13.5 km south of the regional and all-weather Trans-Taiga Road and powerline infrastructure.

Darren L. Smith, Vice President of Exploration for the Company comments, *"These final holes from our winter program at CV5 continue to impress and demonstrate the scale of mineralization over a significant strike length. With the focus at CV5 on upgrading the confidence of mineral resources from the*

Inferred to Indicated categories, we are confident in meaningful conversion in our pending MRE update, on schedule for Q3 2024."

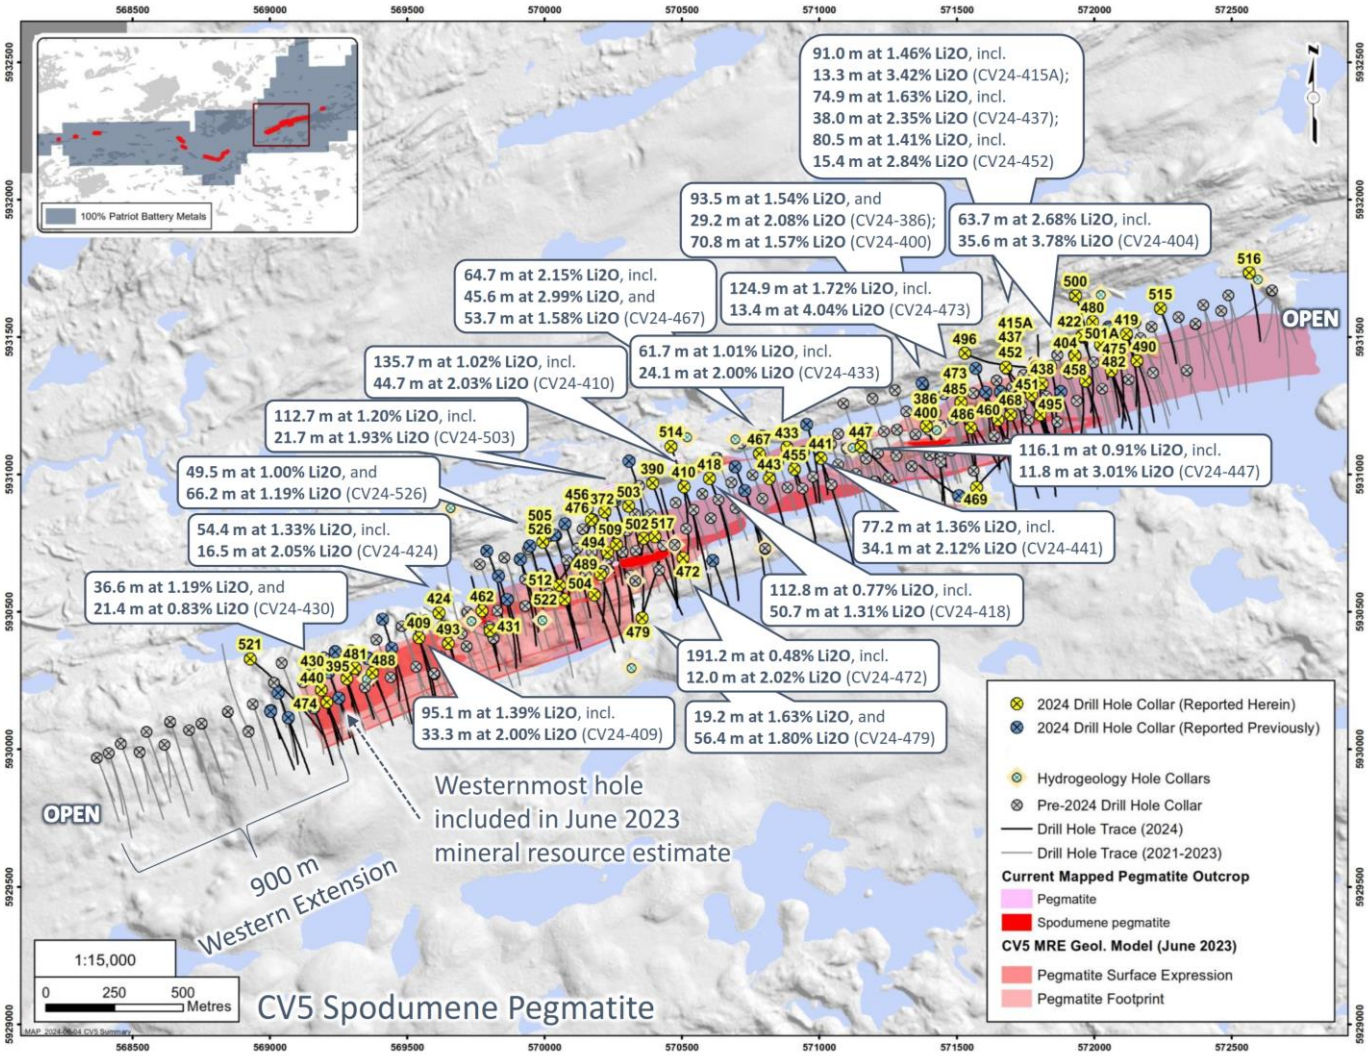

Figure 1: Drill holes completed at the CV5 Spodumene Pegmatite through April 2024.

Core assay results for 67 drill holes, completed during the 2024 winter drill program at the CV5 Spodumene Pegmatite, are reported in this announcement (Figure 1 and Table 1). These are the final batch of core assay results from CV5 drill holes of the program. Highlights include:

- **124.9 m at 1.72% Li_2O**, including **13.4 m at 4.04% Li_2O** (CV24-433).
- **135.7 m at 1.02% Li_2O**, including **44.7 m at 2.03% Li_2O** (CV24-410).
- **112.7 m at 1.20% Li_2O**, including **21.7 m at 1.93% Li_2O** (CV24-503).
- **116.1 m at 0.91% Li_2O**, including **11.8 m at 3.01% Li_2O** (CV24-447).
- **95.1 m at 1.39% Li_2O**, including **33.3 m at 2.00% Li_2O** (CV24-409).
- **93.5 m at 1.54% Li_2O**, and **29.2 m at 2.08% Li_2O** (CV24-386).

For personal use only

For personal use only

- **91.0 m at 1.46% Li_2O**, including **13.3 m at 3.42% Li_2O** (CV24-415A).
- **63.7 m at 2.68% Li_2O**, including **35.6 m at 3.78% Li_2O** (CV24-404).
- **80.5 m at 1.41% Li_2O**, including **15.4 m at 2.84% Li_2O** (CV24-452).
- **64.7 m at 2.15% Li_2O**, and **53.7 m at 1.58% Li_2O** (CV24-467).

These drill holes tested the majority of the strike length currently defined at CV5, which remains open at both ends, at various depths and orientations. Select mineralized core intercepts are presented below in Figure 2 though Figure 5.

The 2024 winter drill program at CV5 focused on resource infill and covered ~3.9 km of the total 4.6 km pegmatite strike length defined to date. The primary objective of the infill drilling is to improve the confidence of the geological model at CV5 to support an upgrade of Mineral Resources from the Inferred category to the Indicated category. This includes the delineation of a coherent body of Indicated Mineral Resources to support advanced development and pending economic studies at CV5.

The program also included six geomechanical holes (with five reported in this announcement, see Table 2), which were completed to support open-pit design at CV5. These holes were completed at various locations and orientations proximal to the margins of the pegmatite and targeted specific host rock types and structure, with optical and acoustics televiewer data also collected. Two of these holes intersected significant intervals of spodumene pegmatite with results including **116.1 m at 0.91% Li_2O** (CV24-447) and **56.4 m at 1.80 % Li_2O** (CV24-479).

Figure 2: Spodumene pegmatite in CV24-473. Core grades ~4% Li_2O over interval.

For personal use only

Figure 3: Spodumene pegmatite in CV24-404. Core grades ~3.7% Li_2O over interval.

Figure 4: Spodumene pegmatite in CV24-410. Core grades 5.24% Li_2O over 2.2 m (226.5 m to 228.7 m).

For personal use only

Figure 5: Spodumene pegmatite in drill hole CV24-415A. Core grades ~3.0% Li_2O over interval.

The 2024 winter drill program totaled **62,518 m (166 holes)**, including 50,961 m (121 holes) at CV5 and 11,557 m (45 holes) at CV13. Core assay results for all drill holes completed at CV5 during the program have now been reported. A total of 4,538 m (16 holes) remain to be reported from CV13 and include multiple step-out drill holes targeting the high-grade Vega Zone (see news release dated June 10, 2024).

An updated MRE for the Corvette Project, incorporating drilling through April 2024, is scheduled for Q3 2024. This MRE update will include both the CV5 and CV13 spodumene pegmatites and a total anticipated metreage of 134,129 m (369 holes) and 29,121 m (133 holes), respectively.

Core sample assays for drill holes reported herein from the CV5 Spodumene Pegmatite are presented in Table 1 for all pegmatite intersections >2 m. Drill hole locations and attributes are presented in Table 2.

For personal use only

Table 1: Core assay summary for drill holes reported herein at the CV5 Spodumene Pegmatite.

Hole ID	From (m)	To (m)	Interval (m)	Li_2O (%)	Ta_2O_5 (ppm)
CV24-372	158.4	167.2	8.8	1.99	113
	172.1	186.2	**14.0**	**1.20**	101
	192.7	233.0	**40.3**	**1.68**	112
incl.	192.7	214.5	**21.9**	**2.22**	121
	268.9	282.1	**13.3**	**1.71**	159
incl.	269.7	278.5	8.8	2.37	157
	364.7	367.3	2.6	1.20	888
	386.7	430.0	**43.3**[3]	**0.96**	79
CV24-386	135.3	228.8	**93.5**	**1.54**	130
incl.	169.1	223.7	**54.7**	**1.99**	147
	490.8	520.0	**29.2**	**2.08**	143
	526.6	529.3	2.7	2.17	94
CV24-390	188.9	242.9	**53.9**	**1.22**	79
incl.	210.9	230.1	**19.2**	**2.10**	97
	398.8	415.2	16.3[3]	0.66	104
	509.9	517.8	8.0	1.12	59
	558.3	566.5	8.2	0.02	114
CV24-395	61.0	67.3	6.3	1.43	110
	86.8	127.8	**41.0**	**1.14**	143
CV24-400	39.4	42.0	2.6	0.10	143
	139.3	210.1	**70.8**	**1.57**	149
	464.8	479.2	14.4	0.50	233
CV24-404	128.4	133.8	5.4	0.44	112
	227.4	291.0	**63.7**	**2.68**	160
incl.	248.4	284.0	**35.6**	**3.78**	202
	616.2	632.7	16.5	0.24	148
CV24-409	27.9	123.0	**95.1**[2]	**1.39**	154
incl.	52.8	86.1	**33.3**	**2.00**	148
	161.1	170.2	9.1	0.52	83
	208.7	211.7	3.0	0.43	115
CV24-410	125.9	261.5	**135.7**	**1.02**	106
incl.	204.9	249.6	**44.7**	**2.03**	69
	486.2	489.6	3.4	1.59	57
	544.8	549.3	4.4	0.01	68
	561.6	564.8	3.3	0.02	201
CV24-415	*No >2 m pegmatite intersections*				
CV24-415A	116.7	129.3	12.6	0.67	220
incl.	118.0	123.2	5.2	1.57	253
	209.0	300.0	**91.0**	**1.46**	131
incl.	224.6	254.5	**30.0**	**2.02**	203
incl.	283.9	297.1	**13.3**	**3.42**	151
	512.1	515.4	3.2	0.38	170
	534.8	541.5	6.7	1.04	91
	545.3	553.2	7.9	1.21	227

Hole ID	From (m)	To (m)	Interval (m)	Li_2O (%)	Ta_2O_5 (ppm)
CV24-418	131.6	136.0	4.4	1.09	104
	145.1	257.9	**112.8**	**0.77**	131
incl.	199.2	249.9	**50.7**	**1.31**	179
	274.1	281.1	7.1	1.74	74
	468.4	475.7	7.3	1.14	69
	555.1	557.7	2.6	0.47	71
	558.8	561.4	2.6	0.04	50
	569.1	576.9	7.8	0.16	67
CV24-419	183.9	187.2	3.3	0.35	94
	262.2	273.5	11.3	0.71	50
CV24-422	234.2	237.5	3.4	0.07	158
	317.8	375.2	**57.4**	**0.80**	167
	391.7	410.4	**18.8**	**1.86**	110
	418.4	423.0	4.6	0.06	99
CV24-424	136.9	140.6	3.7	0.43	79
	144.1	198.5	**54.4**	**1.33**	140
incl.	144.1	160.5	**16.5**	**2.05**	133
CV24-430	26.7	63.3	**36.6**[2]	**1.19**	191
	73.1	94.4	**21.4**	**0.83**	238
	224.5	233.0	8.6	1.24	165
CV24-431	153.8	165.9	**12.1**	**1.56**	147
CV24-433	194.5	256.2	**61.7**	**1.01**	261
incl.	194.5	218.6	**24.1**	**2.00**	207
or	210.0	216.9	**6.9**	**3.19**	278
	285.2	298.6	**13.5**	**1.28**	109
	304.8	314.1	9.3	0.20	124
	450.3	464.9	14.6[3]	0.14	163
	498.2	507.4	9.3[3]	0.10	95
CV24-437	119.9	128.8	8.9[3]	1.02	317
	233.1	307.9	**74.9**	**1.63**	210
incl.	255.2	293.3	**38.0**	**2.35**	191
	351.9	355.6	3.7	1.95	131
CV24-438	45.6	48.2	2.7	0.75	122
	129.4	146.1	16.7	0.23	143
	156.5	177.4	20.9	0.56	146
CV24-440	27.0	30.5	3.5[2]	1.89	103
	33.3	41.7	8.3	0.54	264
	84.7	87.2	2.4	0.05	137
	106.52	114.94	8.4	0.47	120
	117.8	126.8	9.0	0.31	113
CV24-441	107.8	119.1	11.3	0.07	82
	123.2	200.4	**77.2**	**1.36**	**384**
incl.	139.1	173.2	**34.1**	**2.12**	110

For personal use only

Hole ID	From (m)	To (m)	Interval (m)	Li_2O (%)	Ta_2O_5 (ppm)
CV24-443	63.0	131.5	**68.5**	**0.92**	151
incl.	70.0	101.5	**31.5**	**1.33**	149
CV24-447	109.2	225.3	**116.1**	**0.91**	187
incl.	157.7	194.0	**36.3**	**1.69**	188
or	159.5	171.3	**11.8**	**3.01**	149
CV24-451	15.8	19.3	3.5	0.74	221
	138.4	152.3	13.9	0.31	108
CV24-452	117.9	130.8	**13.0**	**1.49**	170
	234.6	315.1	**80.5**	**1.41**	134
incl.	243.7	259.1	**15.4**	**2.84**	91
incl.	290.1	313.3	**23.3**	**2.24**	170
CV24-455	75.4	154.1	78.6	0.56	117
incl.	80.0	115.0	**35.0**	**0.95**	121
CV24-456	198.8	210.1	11.3	0.35	219
CV24-458	48.3	50.7	2.4	0.29	106
	147.4	159.0	**11.6**	**1.31**	71
	308.8	311.4	2.6	0.01	76
CV24-460	45.4	49.1	3.7	0.04	52
	124.4	130.8	6.4	1.37	95
CV24-462	2.6	42.6	**39.9**(2)	**1.21**	166
incl.	2.6	17.6	**15.0**	**2.01**	204
	110.7	121.9	11.2(3)	0.25	124
	197.1	206.9	9.8	0.03	75
	286.2	288.4	2.2	0.01	88
CV24-467	141.0	205.7	**64.7**	**2.15**	103
incl.	160.0	205.7	**45.6**	**2.99**	115
	218.6	272.2	**53.7**(3)	**1.58**	117
incl.	221.3	245.0	**23.7**	**2.24**	119
	457.0	459.6	2.6	0.02	102
	510.2	515.5	5.3	1.70	143
CV24-468	51.4	53.6	2.2	0.02	71
	122.1	128.1	6.0	1.05	163
CV24-469	57.2	59.9	2.7	0.00	4
CV24-472	29.3	220.5	**191.2**(3)	**0.48**	71
incl.	143.7	155.7	**12.0**	**2.02**	72
CV24-473	42.8	50.2	7.4	2.03	201
	152.5	162.3	9.8	0.85	241
	170.3	295.2	**124.9**	**1.72**	138
incl.	217.3	292.0	**74.7**	**2.43**	161
or	273.0	286.4	**13.4**	**4.04**	175
	304.3	312.3	7.9	0.42	438
CV24-474	32.0	49.3	**17.3**(2)	**1.96**	143
incl.	32.0	41.4	**9.4**	**2.63**	168
	52.8	59.2	6.3	0.41	248
CV24-475	*No >2 m pegmatite intersections*				

Hole ID	From (m)	To (m)	Interval (m)	Li_2O (%)	Ta_2O_5 (ppm)
CV24-476	174.1	181.7	7.7	0.50	93
	184.8	195.2	**10.4**(3)	**0.85**	125
	249.6	253.6	4.1	0.06	107
	263.3	279.3	**16.0**	**1.93**	117
	331.9	336.9	5.0	1.01	153
	344.5	353.2	8.7	0.21	90
	357.3	376.4	**19.0**(3)	**2.35**	114
CV24-479	226.3	235.5	9.2	1.07	357
	309.6	328.9	**19.2**(3)	**1.63**	75
incl.	320.5	328.9	**8.4**	**2.51**	104
	337.3	393.7	**56.4**	**1.80**	111
incl.	373.0	392.4	**19.4**	**2.53**	114
CV24-480	530.5	533.6	3.1	0.01	156
CV24-481	87.9	97.0	9.1	1.38	90
	105.1	108.5	3.4	0.10	168
	128.8	135.4	6.6	1.05	82
	139.0	163.4	24.4	0.62	133
CV24-482	155.8	163.9	8.2	0.15	127
CV24-485	29.5	32.4	2.9	0.58	192
	45.6	50.0	4.4	0.39	161
	223.3	260.9	**37.5**	**1.75**	276
incl.	233.0	245.5	**12.5**	**2.90**	114
CV24-486	24.6	46.2	**21.6**	**2.16**	220
incl.	24.6	36.2	**11.6**	**3.12**	204
	122.1	133.0	11.0(3)	0.71	178
CV24-488	27.8	35.4	7.6(2)	1.08	164
	79.1	91.7	**12.5**	**1.26**	91
	123.0	128.5	5.4	1.07	99
	132.3	150.0	17.8	0.52	136
CV24-489	21.1	23.6	2.6	0.73	885
	28.4	35.4	7.0	1.49	129
	76.1	78.1	2.0	0.01	83
	284.5	288.9	4.4	0.00	98
CV24-490	192.8	198.8	5.9	0.17	59
CV24-493	62.6	86.7	**24.1**	**0.80**	84
	141.6	150.6	9.1	0.43	97
	184.0	187.9	4.0	0.18	118
CV24-494	35.3	122.2	**87.0**	**0.95**	139
	262.0	277.1	**15.2**	**1.05**	133
	382.6	394.0	11.4	0.02	78
CV24-495	81.9	85.3	3.4	0.60	163
CV24-496	*No >2 m pegmatite intersections*				
CV24-500	*No >2 m pegmatite intersections*				
CV24-501	*No >2 m pegmatite intersections*				

For personal use only

Hole ID	From (m)	To (m)	Interval (m)	Li_2O (%)	Ta_2O_5 (ppm)
CV24-501A	155.6	158.9	3.3	1.04	89
	235.6	259.8	24.2	0.46	246
incl.	246.6	253.3	6.7	1.23	234
CV24-502	32.1	107.6	**75.5**	**0.87**	109
incl.	80.5	96.9	**16.4**	**1.99**	116
	265.8	288.0	**22.2**	**1.88**	275
	401.9	411.7	9.8	0.06	69
CV24-503	151.8	264.5	**112.7**(3)	**1.20**	86
incl.	166.5	180.0	**13.5**	**2.08**	113
incl.	225.6	247.4	**21.7**	**1.93**	99
	387.8	408.6	20.8	0.77	119
	497.1	500.1	3.0	0.01	76
	502.4	506.3	3.8	0.01	78
CV24-504	*No >2 m pegmatite intersections*				
CV24-505	178.6	180.9	2.4	0.05	160
	234.5	241.8	7.3	1.94	104
	252.2	260.5	8.3	0.57	132
	393.1	398.5	5.4	0.51	88
CV24-509	42.1	127.4	85.2	0.54	109
incl.	45.0	59.6	**14.5**	**1.42**	90
	251.4	264.5	**13.1**	**1.59**	145
	385.6	396.0	10.4(3)	0.03	75
CV24-512	3.6	8.1	4.6(2)	0.04	654
	23.9	27.2	3.3	0.09	169
	61.1	75.4	**14.3**	**0.73**	168
	84.9	95.1	**10.1**(3)	**1.15**	178
	254.8	260.0	5.3	0.01	79

Hole ID	From (m)	To (m)	Interval (m)	Li_2O (%)	Ta_2O_5 (ppm)
CV24-514	521.0	525.3	4.3	0.17	178
CV24-515	341.0	410.0	69.0	0.63	238
incl.	342.5	360.0	**17.5**	**1.42**	237
CV24-516	*Hole to be continued in summer 2024*				
CV24-517	44.0	52.5	8.4	1.51	255
	78.4	104.8	**26.3**	**0.93**	126
	296.6	312.4	**15.7**	**0.77**	137
	409.6	419.7	10.1	0.11	58
CV24-521	315.8	318.2	2.4	0.01	111
	447.8	458.9	**11.2**	**0.99**	209
	474.3	478.0	3.8	0.84	195
	482.8	495.8	13.1	0.11	124
CV24-522	206.1	209.0	2.9	0.01	98
	226.8	229.3	2.4	0.01	93
CV24-526	172.1	176.0	3.9	1.47	129
	224.7	274.2	**49.5**(3)	**1.00**	110
	331.5	397.7	**66.2**	**1.19**	114
incl.	332.7	369.9	**37.2**	**1.81**	108
	418.9	428.4	9.5	0.08	88

(1) All intervals are core length and presented for all pegmatite intervals >2 m. Geological modelling is ongoing; (2) Collared in pegmatite; (3) Includes minor intervals of non-pegmatite units (typically <3 m); (4) Hole CV24-516 ended prior to reaching target due to drilling conditions and will be continued in summer 2024.

For personal use only

Table 2: Attributes for drill holes reported herein at the CV5 Spodumene Pegmatite.

Hole ID	Substrate	Total Depth (m)	Azimuth (°)	Dip (°)	Easting	Northing	Elevation (m)	Core Size	Cluster	Comments
CV24-372	Land	487.9	158	-45	570218.9	5930863.1	375.2	NQ	CV5	
CV24-386	Land	552.6	158	-58	571388.7	5931175.9	376.5	NQ	CV5	
CV24-390	Land	620.0	158	-45	570392.4	5930967.3	379.2	NQ	CV5	
CV24-395	Land	296.1	158	-45	569280.1	5930256.9	394.0	NQ	CV5	
CV24-400	Land	551.0	158	-52	571388.7	5931175.6	376.5	NQ	CV5	
CV24-404	Land	668.2	162	-59	571931.0	5931431.7	377.3	NQ	CV5	
CV24-409	Land	356.1	158	-45	569542.0	5930406.0	383.7	NQ	CV5	
CV24-410	Ice	609.0	158	-47	570507.2	5930955.1	372.0	NQ	CV5	
CV24-415	Land	91.6	158	-45	571679.3	5931388.0	374.3	NQ	CV5	Hole lost
CV24-415A	Land	576.4	158	-45	571679.3	5931388.3	374.3	NQ	CV5	
CV24-418	Ice	624.4	158	-47	570600.7	5930984.1	372.1	NQ	CV5	
CV24-419	Land	595.9	165	-45	572117.8	5931509.9	372.8	NQ	CV5	
CV24-422	Land	572.8	158	-58	571955.7	5931504.0	373.3	NQ	CV5	
CV24-424	Land	389.0	158	-53	569615.3	5930495.5	378.1	NQ	CV5	
CV24-430	Land	361.9	158	-45	569187.9	5930215.3	397.6	NQ	CV5	
CV24-431	Land	352.9	338	-60	569800.9	5930431.0	379.5	NQ	CV5	
CV24-433	Ice	508.9	158	-48	570881.7	5931098.0	372.1	NQ	CV5	
CV24-437	Land	433.9	158	-55	571679.2	5931388.7	374.3	NQ	CV5	
CV24-438	Ice	408.3	158	-48	571812.0	5931329.7	372.0	NQ	CV5	
CV24-440	Land	438.5	158	-75	569187.5	5930215.9	397.5	NQ	CV5	
CV24-441	Ice	342.2	158	-65	571004.7	5931058.3	372.0	NQ	CV5	
CV24-443	Ice	383.2	158	-45	570818.0	5930984.2	372.0	NQ	CV5	
CV24-447	Land	308.4	130	-55	571152.3	5931101.1	375.1	NQ	CV5	Geomechanical hole
CV24-451	Ice	503.0	158	-45	571771.2	5931288.6	372.0	NQ	CV5	
CV24-452	Land	505.9	145	-50	571679.5	5931388.0	374.3	HQ	CV5	
CV24-455	Ice	379.8	158	-45	570909.9	5931018.4	372.0	NQ	CV5	
CV24-456	Land	456.9	200	-55	570174.5	5930836.0	378.3	NQ	CV5	Geomechanical hole
CV24-458	Ice	328.0	152	-62	571968.6	5931339.6	371.9	NQ	CV5	
CV24-460	Ice	263.0	158	-45	571650.2	5931198.3	372.0	NQ	CV5	
CV24-462	Land	299.5	158	-45	569773.4	5930503.0	377.2	NQ	CV5	
CV24-467	Ice	539.2	158	-45	570782.1	5931075.0	372.3	NQ	CV5	
CV24-468	Ice	461.0	158	-46	571695.3	5931217.0	372.0	NQ	CV5	
CV24-469	Land	409.9	40	-60	571572.0	5930953.4	373.2	NQ	CV5	Geomechanical hole
CV24-472	Land	355.9	338	-45	570503.6	5930694.8	379.8	NQ	CV5	
CV24-473	Ice	359.0	153	-58	571514.3	5931262.1	371.9	NQ	CV5	
CV24-474	Land	223.9	159	-46	569207.2	5930170.9	396.0	NQ	CV5	
CV24-475	Ice	280.1	158	-45	572062.4	5931376.6	371.9	NQ	CV5	
CV24-476	Land	557.0	154	-55	570170.7	5930834.1	378.4	NQ	CV5	
CV24-479	Land	467.1	16	-55	570355.0	5930476.9	379.2	NQ	CV5	Geomechanical hole
CV24-480	Land	560.3	158	-65	571994.4	5931554.1	372.2	NQ	CV5	
CV24-481	Land	272.3	157	-46	569311.2	5930294.6	391.0	NQ	CV5	
CV24-482	Ice	305.0	158	-55	572062.4	5931376.0	371.9	NQ	CV5	
CV24-485	Ice	365.0	150	-45	571515.2	5931261.4	371.9	NQ	CV5	
CV24-486	Ice	299.0	156	-45	571551.6	5931169.2	372.0	NQ	CV5	
CV24-488	Land	197.0	160	-45	569373.9	5930278.5	390.3	NQ	CV5	
CV24-489	Land	356.0	158	-45	570204.3	5930636.1	382.0	NQ	CV5	
CV24-490	Ice	314.3	158	-47	572155.1	5931412.9	372.1	NQ	CV5	
CV24-493	Land	218.1	160	-45	569649.4	5930384.4	381.0	NQ	CV5	

For personal use only

Hole ID	Substrate	Total Depth (m)	Azimuth (°)	Dip (°)	Easting	Northing	Elevation (m)	Core Size	Cluster	Comments
CV24-494	Land	439.9	158	-60	570227.9	5930714.7	374.8	NQ	CV5	
CV24-495	Ice	230.3	158	-45	571803.4	5931216.2	372.0	NQ	CV5	
CV24-496	Land	509.0	113	-55	571529.1	5931440.2	390.7	NQ	CV5	Geomechanical hole
CV24-500	Land	512.1	158	-65	571932.1	5931649.5	378.7	NQ	CV5	
CV24-501	Land	46.7	155	-49	572024.8	5931469.7	377.9	NQ	CV5	Hole lost
CV24-501A	Land	403.2	155	-49	572023.6	5931471.2	374.6	NQ	CV5	
CV24-502	Land	476.5	145	-52	570360.1	5930766.7	374.0	NQ	CV5	
CV24-503	Land	533.1	160	-45	570305.6	5930884.3	372.1	NQ	CV5	
CV24-504	Land	302.4	158	-45	570181.3	5930561.3	385.0	NQ	CV5	
CV24-505	Land	581.0	158	-58	569994.1	5930753.1	376.5	NQ	CV5	
CV24-509	Land	425.4	157	-53	570262.4	5930743.7	373.9	NQ	CV5	
CV24-512	Land	317.0	158	-46	570054.0	5930596.6	376.9	NQ	CV5	
CV24-514	Land	601.3	158	-50	570459.7	5931100.8	378.2	NQ	CV5	
CV24-515	Ice	424.4	160	-58	572240.8	5931602.7	371.8	NQ	CV5	
CV24-516	Land	368.0	170	-45	572564.5	5931732.2	375.0	NQ	CV5	
CV24-517	Land	428.1	152	-56	570402.3	5930773.8	374.1	NQ	CV5	
CV24-521	Land	504.1	158	-45	568928.0	5930328.5	377.9	NQ	CV5	
CV24-522	Land	260.2	159	-45	570073.4	5930544.4	379.3	NQ	CV5	
CV24-526	Land	442.9	158	-45	569994.4	5930752.6	376.4	NQ	CV5	

(1) Coordinate system NAD83 / UTM zone 18N; (2) All drill holes are diamond drill; (3) Azimuths and dips presented are those 'planned' and may vary off collar/downhole; (4) Hydrogeology, infrastructure, & geomechanical holes completed to support Project development.

[1] The CV5 Mineral Resource Estimate (109.2 Mt at 1.42% Li_2O and 160 ppm Ta_2O_5 Inferred) is reported at a cut-off grade of 0.40% Li_2O with an Effective Date of June 25, 2023 (through drill hole CV23-190). Mineral Resources are not Mineral Reserves as they do not have demonstrated economic viability. Largest lithium pegmatite resource in the Americas based on contained LCE.

Quality Assurance / Quality Control (QAQC)

A Quality Assurance / Quality Control protocol following industry best practices was incorporated into the program and included systematic insertion of quartz blanks and certified reference materials into sample batches at a rate of approximately 5%. Additionally, analysis of pulp-split sample duplicates was completed to assess analytical precision, and external (secondary) laboratory pulp-split duplicates were prepared at the primary lab for subsequent check analysis and validation.

All core samples collected were shipped to SGS Canada's laboratory in Val-d'Or, QC, or Radisson, QC, for sample preparation (code PRP90 special) which includes drying at 105°C, crush to 90% passing 2 mm, riffle split 250 g, and pulverize 85% passing 75 microns. The pulps were shipped by air to SGS Canada's laboratory in Burnaby, BC, where the samples were homogenized and subsequently analyzed for multi-element (including Li and Ta) using sodium peroxide fusion with ICP-AES/MS finish (codes GE_ICP91A50 and GE_IMS91A50).

For personal use only

About the CV Lithium Trend

The CV Lithium Trend is an emerging spodumene pegmatite district discovered by the Company in 2017 and is interpreted to span more than 50 kilometres across the Corvette Property. The core area includes the approximate 4.6 km long CV5 Spodumene Pegmatite, which hosts a maiden mineral resource estimate of 109.2 Mt at 1.42% Li_2O inferred[1].

To date, eight (8) distinct clusters of lithium pegmatite have been discovered across the Corvette Property – CV4, CV5, CV8, CV9, CV10, CV12, CV13, and the recently discovered CV14. Given the proximity of some pegmatite outcrops to each other, as well as the shallow till cover in the area, it is probable that some of the outcrops may reflect a discontinuous surface exposure of a single, larger pegmatite "outcrop" subsurface.

Qualified/Competent Person

The information in this news release that relates to exploration results for the Corvette Property is based on, and fairly represents, information compiled by Mr. Darren L. Smith, M.Sc., P.Geo., who is a Qualified Person as defined by *National Instrument 43-101 – Standards of Disclosure for Mineral Projects*, and member in good standing with the *Ordre des Géologues du Québec* (Geologist Permit number 01968), and with the Association of Professional Engineers and Geoscientists of Alberta (member number 87868). Mr. Smith has reviewed and approved the technical information in this news release.

Mr. Smith is Vice President of Exploration for Patriot Battery Metals Inc. and holds common shares and options in the Company.

Mr. Smith has sufficient experience, which is relevant to the style of mineralization, type of deposit under consideration, and to the activities being undertaken to qualify as a Competent Person as described by the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (the JORC Code). Mr. Smith consents to the inclusion in this news release of the matters based on his information in the form and context in which it appears.

About Patriot Battery Metals Inc.

Patriot Battery Metals Inc. is a hard-rock lithium exploration company focused on advancing its district-scale 100% owned Corvette Property located in the Eeyou Istchee James Bay region of Quebec, Canada, and proximal to regional road and powerline infrastructure. The Corvette Property hosts the CV5 Spodumene Pegmatite with a maiden Mineral Resource Estimate of 109.2 Mt at 1.42% Li_2O Inferred[1] and ranks as the largest lithium pegmatite resource in the Americas based on contained lithium carbonate equivalent (LCE), and one of the top 10 largest lithium pegmatite resources in the world. Additionally, the Corvette Property hosts multiple other spodumene pegmatite clusters that remain to be drill tested, as well as significant areas of prospective trend that remain to be assessed.

[1] The CV5 Mineral Resource Estimate (109.2 Mt at 1.42% Li_2O and 160 ppm Ta_2O_5 Inferred) is reported at a cut-off grade of 0.40% Li_2O with an Effective Date of June 25, 2023 (through drill hole CV23-190). Mineral Resources are not Mineral Reserves as they do not have demonstrated economic viability. Largest lithium pegmatite resource in the Americas based on contained LCE.

For further information, please contact us at info@patriotbatterymetals.com or by calling +1 (604) 279-8709, or visit www.patriotbatterymetals.com. Please also refer to the Company's continuous disclosure filings, available under its profile at www.sedarplus.ca and www.asx.com.au, for available exploration data.

This news release has been approved by the Board of Directors.

"*KEN BRINSDEN*"

Kenneth Brinsden, President, CEO, & Managing Director

Brad Seward
Vice President, Investor Relations
T: +61 400 199 471
E: bseward@patriotbatterymetals.com

Olivier Caza-Lapointe
Head, Investor Relations – North America
T: +1 (514) 913-5264
E: ocazalapointe@patriotbatterymetals.com

Disclaimer for Forward-looking Information

This news release contains "forward-looking information" or "forward-looking statements" within the meaning of applicable securities laws and other statements that are not historical facts. Forward-looking statements are included to provide information about management's current expectations and plans that allows investors and others to have a better understanding of the Company's business plans and financial performance and condition.

All statements, other than statements of historical fact included in this news release, regarding the Company's strategy, future operations, technical assessments, prospects, plans and objectives of management are forward-looking statements that involve risks and uncertainties. Forward-looking statements are typically identified by words such as "plan", "expect", "estimate", "intend", "anticipate", "believe", or variations of such words and phrases or statements that certain actions, events or results "may", "could", "would", "might" or "will" be taken, occur or be achieved. Forward-looking statements in this release include, but are not limited to, statements concerning: the completion and release of an updated MRE on the Property, the potential of the Vega Zone, the release and content of the results of the winter drill program, the processing and receipt of all remaining core samples, statements relating to the continuity of spodumene pegmatite at CV5, and statements about the probability that some of the outcrops may reflect a discontinuous surface exposure of a single, larger pegmatite "outcrop" subsurface.

Forward-looking information is based upon certain assumptions and other important factors that, if untrue, could cause the actual results, performance or achievements of the Company to be materially different from future results, performance or achievements expressed or implied by such information or statements. There can be no assurance that such information or statements will prove to be accurate. Key assumptions upon which the Company's forward-looking information is based include that proposed exploration and mineral resource estimate work on the Property will continue as expected, and that exploration and development results continue to support management's current plans for Property development.

For personal use only

Readers are cautioned that the foregoing list is not exhaustive of all factors and assumptions which may have been used. Forward-looking statements are also subject to risks and uncertainties facing the Company's business, any of which could have a material adverse effect on the Company's business, financial condition, results of operations and growth prospects. Some of the risks the Company faces and the uncertainties that could cause actual results to differ materially from those expressed in the forward-looking statements include, among others, the ability to execute on plans relating to the Company's Project, including the timing thereof. In addition, readers are directed to carefully review the detailed risk discussion in the Company's most recent Annual Information Form filed on SEDAR+, which discussion is incorporated by reference in this news release, for a fuller understanding of the risks and uncertainties that affect the Company's business and operations.

Although the Company believes its expectations are based upon reasonable assumptions and has attempted to identify important factors that could cause actual actions, events or results to differ materially from those described in forward-looking statements, there may be other factors that cause actions, events or results not to be as anticipated, estimated or intended. There can be no assurance that forward-looking information will prove to be accurate, as actual results and future events could differ materially from those anticipated in such information. As such, these risks are not exhaustive; however, they should be considered carefully. If any of these risks or uncertainties materialize, actual results may vary materially from those anticipated in the forward-looking statements found herein. Due to the risks, uncertainties and assumptions inherent in forward-looking statements, readers should not place undue reliance on forward-looking statements.

Forward-looking statements contained herein are presented for the purpose of assisting investors in understanding the Company's business plans, financial performance and condition and may not be appropriate for other purposes.

The forward-looking statements contained herein are made only as of the date hereof. The Company disclaims any intention or obligation to update or revise any forward-looking statements, whether as a result of new information, future events or otherwise, except to the extent required by applicable law. The Company qualifies all of its forward-looking statements by these cautionary statements.

Competent Person Statement (ASX Listing Rule 5.22)

The mineral resource estimate in this release was reported by the Company in accordance with ASX Listing Rule 5.8 on July 31, 2023. The Company confirms it is not aware of any new information or data that materially affects the information included in the announcement and that all material assumptions and technical parameters underpinning the estimates in the announcement continue to apply and have not materially changed. The Company confirms that the form and context in which the competent person's findings are presented have not been materially modified from the original market announcement.

For personal use only

For personal use only

Appendix 1 – JORC Code 2012 Table 1 (ASX Listing Rule 5.7.1)

Section 1 – Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	• Nature and quality of sampling (eg cut channels, random chips, or specific specialized industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. • Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. • Aspects of the determination of mineralization that are Material to the Public Report. • In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverized to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralization types (eg submarine nodules) may warrant disclosure of detailed information.	• Core sampling protocols meet industry standard practices. • Core sampling is guided by lithology as determined during geological logging (i.e., by a geologist). All pegmatite intervals are sampled in their entirety (half-core), regardless if spodumene mineralization is noted or not (in order to ensure an unbiased sampling approach) in addition to ~1 to 3 m of sampling into the adjacent host rock (dependent on pegmatite interval length) to "bookend" the sampled pegmatite. • The minimum individual sample length is typically 0.5 m and the maximum sample length is typically 2.0 m. Targeted individual pegmatite sample lengths are 1.0 to 1.5 m. • All drill core is oriented to maximum foliation prior to logging and sampling and is cut with a core saw into half-core pieces, with one half-core collected for assay, and the other half-core remaining in the box for reference. • Core samples collected from drill holes were shipped to SGS Canada's laboratory in Val-d'Or, QC, and Radisson, QC, for sample preparation (code PRP90 special) which included drying at 105°C, crush to 90% passing 2 mm, riffle split 250 g, and pulverize 85% passing 75 microns. Core sample pulps were shipped by air to SGS Canada's laboratory in Burnaby, BC, where the samples were homogenized and subsequently analyzed for multi-element (including Li and Ta) using sodium peroxide fusion with ICP-AES/MS finish (codes GE_ICP91A50 and GE_IMS91A50).
Drilling techniques	• Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	• NQ or HQ size core diamond drilling was completed for all holes. Core was not oriented.
Drill sample recovery	• Method of recording and assessing core and chip sample recoveries and results assessed. • Measures taken to maximize sample recovery and ensure representative	• All drill core was geotechnically logged following industry standard practices, and include TCR, RQD, ISRM, and Q-Method. Core recovery is very good and typically exceeds 90%.

For personal use only

Criteria	JORC Code explanation	Commentary
	nature of the samples. • Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	
Logging	• Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. • Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. • The total length and percentage of the relevant intersections logged.	• Upon receipt at the core shack, all drill core is pieced together, oriented to maximum foliation, metre marked, geotechnically logged (including structure), alteration logged, geologically logged, and sample logged on an individual sample basis. Core box photos are also collected of all core drilled, regardless of perceived mineralization. Specific gravity measurements of pegmatite are also collected at systematic intervals for all pegmatite drill core using the water immersion method, as well as select host rock drill core. • The logging is qualitative by nature, and includes estimates of spodumene grain size, inclusions, and model mineral estimates. • These logging practices meet or exceed current industry standard practices.
Sub-sampling techniques and sample preparation	• If core, whether cut or sawn and whether quarter, half or all core taken. • If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. • For all sample types, the nature, quality and appropriateness of the sample preparation technique. • Quality control procedures adopted for all sub-sampling stages to maximize representivity of samples. • Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. • Whether sample sizes are appropriate to the grain size of the material being sampled.	• Drill core sampling follows industry best practices. Drill core was saw-cut with half-core sent for geochemical analysis and half-core remaining in the box for reference. The same side of the core was sampled to maintain representativeness. • Sample sizes are appropriate for the material being assayed. • A Quality Assurance / Quality Control (QAQC) protocol following industry best practices was incorporated into the program and included systematic insertion of quartz blanks and certified reference materials (CRMs) into sample batches at a rate of approximately 5% each. Additionally, analysis of pulp-split duplicates was completed to assess analytical precision, and external (secondary) laboratory pulp-split duplicates were prepared at the primary lab for subsequent check analysis and validation at a secondary lab. • All protocols employed are considered appropriate for the sample type and nature of mineralization and are considered the optimal approach for maintaining representativeness in sampling.

For personal use only

Criteria	JORC Code explanation	Commentary
Quality of assay data and laboratory tests	• The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. • For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. • Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	• Core samples collected from drill holes were shipped to SGS Canada's laboratory in Val-d'Or, QC (CV5) and Radisson, QC (CV13) for standard sample preparation (code PRP90 special) which included drying at 105°C, crush to 90% passing 2 mm, riffle split 250 g, and pulverize 85% passing 75 microns. Core sample pulps were shipped by air to SGS Canada's laboratory in Burnaby, BC, where the samples were homogenized and subsequently analyzed for multi-element (including Li and Ta) using sodium peroxide fusion with ICP-AES/MS finish (codes GE_ICP91A50 and GE_IMS91A50). • The Company relies on both its internal QAQC protocols (systematic use of blanks, certified reference materials, and external checks), as well as the laboratory's internal QAQC. • All protocols employed are considered appropriate for the sample type and nature of mineralization and are considered the optimal approach for maintaining representativeness in sampling.
Verification of sampling and assaying	• The verification of significant intersections by either independent or alternative company personnel. • The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data.	• Intervals are reviewed and compiled by the VP Exploration and Project Managers prior to disclosure, including a review of the Company's internal QAQC sample analytical data. • Data capture utilizes MX Deposit software whereby core logging data is entered directly into the software for storage, including direct import of laboratory analytical certificates as they are received. The Company employs various on-site and post QAQC protocols to ensure data integrity and accuracy. • Adjustments to data include reporting lithium and tantalum in their oxide forms, as it is reported in elemental form in the assay certificates. Formulas used are Li_2O = Li x 2.153, and Ta_2O_5 = Ta x 1.221.
Location of data points	• Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. • Specification of the grid system used. • Quality and adequacy of topographic control.	• Each drill hole's collar has been surveyed with a RTK Trimble Zephyr 3. • The coordinate system used is UTM NAD83 Zone 18. • The Company completed a property-wide LiDAR and orthophoto survey in August 2022, which provides high-quality topographic control. • The quality and accuracy of the topographic controls are considered adequate for advanced stage exploration and development, including mineral resource estimation.

For personal use only

Criteria	JORC Code explanation	Commentary
Data spacing and distribution	• Data spacing for reporting of Exploration Results. • Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. • Whether sample compositing has been applied.	• At CV5, drill hole collar spacing is dominantly grid based. Several collars are typically completed from the same pad at varied orientations targeting pegmatite pierce points of ~50 to 100 m spacing. • At CV13, drill hole spacing is dominantly grid based at ~100 m; however, collar locations and hole orientations may vary widely, which reflect the varied orientation of the pegmatite body along strike. • At CV9, drill hole collar spacing is irregular with varied hole orientations and multiple collars on the same pad. • It is interpreted that the large majority of the drill hole spacing at each pegmatite is sufficient to support a mineral resource estimate. • Core sample lengths typically range from 0.5 to 2.0 m and average ~1.0 to 1.5 m. Sampling is continuous within all pegmatite encountered in the drill hole.
Orientation of data in relation to geological structure	• Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. • If the relationship between the drilling orientation and the orientation of key mineralized structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	• No sampling bias is anticipated based on structure within the mineralized body. • The principal mineralized bodies are relatively undeformed and very competent, although have some meaningful structural control. • At CV5, the principal mineralized body and adjacent lenses are steeply dipping resulting in oblique angles of intersection with true widths varying based on drill hole angle and orientation of pegmatite at that particular intersection point. i.e., the dip of the mineralized pegmatite body has variations in a vertical sense and along strike, so the true widths are not always apparent until several holes have been drilled (at the appropriate spacing) in any particular drill-fence. • At CV13, the principal pegmatite body has a shallow varied strike and northerly dip. • At CV9, the orientation and geometry of the pegmatite is not well understood. The pegmatite is currently interpreted to be comprised of a single principal dyke, which outcrops at surface, has a steep northerly dip, and is moderately plunging to the east-southeast.
Sample security	• The measures taken to ensure sample security.	• Samples were collected by Company staff or its consultants following specific protocols governing sample collection and handling. Core samples were bagged, placed in large supersacs for added security, palleted, and shipped directly to Val-d'Or, QC, or Radisson, QC, being tracked during shipment along with Chain of Custody. Upon arrival at the laboratory, the samples were cross-referenced with the shipping

Criteria	JORC Code explanation	Commentary
		manifest to confirm all samples were accounted for. At the laboratory, sample bags are evaluated for tampering.
Audits or reviews	• The results of any audits or reviews of sampling techniques and data.	• A review of the sample procedures for the Company's 2021 fall drill program (CF21-001 to 004) and 2022 winter drill program (CV22-015 to 034) was completed by an Independent Competent Person and deemed adequate and acceptable to industry best practices (discussed in a technical report titled "NI 43-101 Technical Report on the Corvette Property, Quebec, Canada", by Alex Knox, M.Sc., P.Geol., Issue Date of June 27th, 2022.) • A review of the sample procedures through the Company's 2023 winter drill program (through CV23-190) was completed by an independent Competent Person with respect to the CV5 Pegmatite's maiden mineral resource estimate and deemed adequate and acceptable to industry best practices (discussed in a technical report titled " NI 43-101 Technical Report, Mineral Resource Estimate for the CV5 Pegmatite, Corvette Property" by Todd McCracken, P.Geo., of BBA Engineering Ltd., and Ryan Cunningham, M.Eng., P.Eng., of Primero Group Americas Inc., Effective Date of June 25, 2023, and Issue Date of September 8, 2023. • Additionally, the Company continually reviews and evaluates its procedures in order to optimize and ensure compliance at all levels of sample data collection and handling.

For personal use only

For personal use only

Section 2 – Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	• Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. • The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	• The Corvette Property is comprised of 463 CDC claims located in the James Bay Region of Quebec, with Patriot Battery Metals Inc. being the registered title holder for all of the claims. The northern border of the Property's primary claim block is located within approximately 6 km to the south of the Trans-Taiga Road and powerline infrastructure corridor. The CV5 Spodumene Pegmatite is situated approximately 13.5 km south of the regional and all-weather Trans-Taiga Road and powerline infrastructure. The CV13 and CV9 spodumene pegmatites are located approximately 3 km west-southwest and 14 km west of CV5, respectively. • The Company holds 100% interest in the Property subject to various royalty obligations depending on original acquisition agreements. DG Resources Management holds a 2% NSR (no buyback) on 76 claims, D.B.A. Canadian Mining House holds a 2% NSR on 50 claims (half buyback for $2M), Osisko Gold Royalties holds a sliding scale NSR of 1.5-3.5% on precious metals, and 2% on all other products, over 111 claims, and Azimut Exploration holds 2% on NSR on 39 claims. • The Property does not overlap any atypically sensitive environmental areas or parks, or historical sites to the knowledge of the Company. There are no known hinderances to operating at the Property, apart from the goose harvesting season (typically mid-April to mid-May) where the communities request helicopter flying not be completed, and potentially wildfires depending on the season, scale, and location. • Claim expiry dates range from February 2025 to November 2026.
Exploration done by other parties	• Acknowledgment and appraisal of exploration by other parties.	• No core assay results from other parties are disclosed herein. • The most recent independent Property review was a technical report titled "NI 43-101 Technical Report, Mineral Resource Estimate for the CV5 Pegmatite, Corvette Property, James Bay Region, Québec, Canada", by Todd McCracken, P.Geo., of BBA Engineering Ltd., and Ryan Cunningham, M.Eng., P.Eng., of Primero Group Americas Inc., Effective Date of June 25, 2023, and Issue Date of September 8, 2023.
Geology	• Deposit type, geological setting and	• The Property overlies a large portion of the Lac Guyer

For personal use only

Criteria	JORC Code explanation	Commentary
	style of mineralization.	Greenstone Belt, considered part of the larger La Grande River Greenstone Belt and is dominated by volcanic rocks metamorphosed to amphibolite facies. The claim block is dominantly host to rocks of the Guyer Group (amphibolite, iron formation, intermediate to mafic volcanics, peridotite, pyroxenite, komatiite, as well as felsic volcanics). The amphibolite rocks that trend east-west (generally steeply south dipping) through this region are bordered to the north by the Magin Formation (conglomerate and wacke) and to the south by an assemblage of tonalite, granodiorite, and diorite, in addition to metasediments of the Marbot Group (conglomerate, wacke). Several regional-scale Proterozoic gabbroic dykes also cut through portions of the Property (Lac Spirt Dykes, Senneterre Dykes). • The geological setting is prospective for gold, silver, base metals, platinum group elements, and lithium over several different deposit styles including orogenic gold (Au), volcanogenic massive sulfide (Cu, Au, Ag), komatiite-ultramafic (Au, Ag, PGE, Ni, Cu, Co), and pegmatite (Li, Ta). • Exploration of the Property has outlined three primary mineral exploration trends crossing dominantly east-west over large portions of the Property – Golden Trend (gold), Maven Trend (copper, gold, silver), and CV Trend (lithium, tantalum). The CV5 and CV13 spodumene pegmatites are situated within the CV Trend. Lithium mineralization at the Property, including at CV5, CV13, and CV9, is observed to occur within quartz-feldspar pegmatite, which may be exposed at surface as high relief 'whale-back' landforms. The pegmatite is often very coarse-grained and off-white in appearance, with darker sections commonly composed of mica and smoky quartz, and occasional tourmaline. • The lithium pegmatites at Corvette are categorized as LCT Pegmatites. Core assays and ongoing mineralogical studies, coupled with field mineral identification and assays, indicate spodumene as the dominant lithium-bearing mineral on the Property, with no significant petalite, lepidolite, lithium-phosphate minerals, or apatite present. The pegmatites also carry significant tantalum values with tantalite indicated to be the mineral phase.
Drill hole Information	• A summary of all information material to the understanding of the exploration	• Drill hole attribute information is included in a table herein.

For personal use only

Criteria	JORC Code explanation	Commentary
	results including a tabulation of the following information for all Material drill holes: ○ easting and northing of the drill hole collar ○ elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar ○ dip and azimuth of the hole ○ down hole length and interception depth ○ hole length. • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	• Pegmatite intersections of <2 m are not typically presented as they are considered insignificant.
Data aggregation methods	• In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated.	• Length weighted averages were used to calculate grade over width. • No specific grade cap or cut-off was used during grade width calculations. The lithium and tantalum length weighted average grade of the entire pegmatite interval is calculated for all pegmatite intervals over 2 m core length, as well as higher grade zones at the discretion of the geologist. Pegmatites have inconsistent mineralization by nature, resulting in some intervals having a small number of poorly mineralized samples included in the calculation. Non-pegmatite internal dilution is limited to typically <3 m where relevant and intervals indicated when assays are reported. • No metal equivalents have been reported.
Relationship between mineralization widths and intercept lengths	• These relationships are particularly important in the reporting of Exploration Results. • If the geometry of the mineralization with respect to the drill hole angle is known, its nature should be reported. • If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	• At CV5, geological modelling is ongoing on a hole-by-hole basis and as assays are received. However, current interpretation supports a principal, large pegmatite body of near vertical to steeply dipping orientation, flanked by several subordinate pegmatite lenses (collectively, the 'CV5 Spodumene Pegmatite') • At CV13, geological modelling is ongoing on a hole-by-hole basis and as assays are received. However, current interpretation supports an upper and lower pegmatite body, each trending sub-parallel to each other with a shallow northerly dip (collectively, the 'CV13 Spodumene Pegmatite')

For personal use only

Criteria	JORC Code explanation	Commentary
		• At CV9, geological modelling is ongoing on a hole-by-hole basis and as assays are received. However, current interpretation indicates CV9 is comprised of a single principal dyke, which outcrops at surface, has a steep northerly dip, and is moderately plunging to the east-southeast. A strike length of 450 m has been delineated through drilling and outcrop. • All reported widths are core length. True widths are not calculated for each hole due to the relatively wide drill spacing at this stage of delineation and the typical irregular nature of pegmatite, as well as the varied drill hole orientations. As such, true widths may vary widely from hole to hole.
Diagrams	• Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	• Please refer to the figures included herein as well as those posted on the Company's website.
Balanced reporting	• Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	• Please refer to the table(s) included herein as well as those posted on the Company's website. • Results for pegmatite intervals <2 m are not reported.
Other substantive exploration data	• Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	• The Company is currently completing site environmental work over the CV5 and CV13 pegmatite area. No endangered flora or fauna have been documented over the Property to date, and several sites have been identified as potentially suitable for mine infrastructure. • The Company has completed a bathymetric survey over the shallow glacial lake which overlies a portion of the CV5 Spodumene Pegmatite. The lake depth ranges from <2 m to approximately 18 m, although the majority of the CV5 Spodumene Pegmatite, as delineated to date, is overlain by typically <2 to 10 m of water. • The Company has completed preliminary metallurgical testing comprised of HLS and magnetic testing, which has produced 6+% Li_2O spodumene concentrates at >70% recovery on both CV5 and CV13 pegmatite material, indicating DMS as a viable primary process approach, and that both CV5 and CV13 could potentially feed the same process plant. A DMS test on

Criteria	JORC Code explanation	Commentary
		CV5 Spodumene Pegmatite material returned a spodumene concentrate grading 5.8% Li_2O at 79% recovery, strongly indicating potential for a DMS only operation to be applicable. • Various mandates required for advancing the Project towards economic studies have been initiated, including but not limited to, environmental baseline, metallurgy, geomechanics, hydrogeology, hydrology, stakeholder engagement, geochemical characterization, as well as transportation and logistical studies.
Further work	• The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). • Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	• The Company intends to continue drilling the pegmatites of the Corvette Property, focused on the CV5 Pegmatite and adjacent subordinate lenses, as well as the CV13 Pegmatite. A follow-up drill program at the CV9 Spodumene Pegmatite is also anticipated.

For personal use only