

6 September 2024

ASX: ENV

DRILLING BROADENS POTENTIAL REE MINERALISATION FOOTPRINT AT CODA NORTH

Enova Mining Ltd (ASX: ENV) is pleased to report significant exploration drilling advances at the CODA project

KEY HIGHLIGHTS

- Enova has successfully completed 14 diamond drill (DD) holes and 21 reverse circulation (RC) drill holes to date, with over 1,500 samples from the CODA North tenements currently at SGS Geosol laboratory in Vespasiano for assaying, poised to deliver important insights into the project's high-grade rare earth element (REE) potential,
- Enova has successfully completed 850 metres of diamond drilling and 985 metres of reverse circulation (RC) drilling, with significant potential REE mineralisation intersected across key target areas of the CODA North project, reinforcing the project's high-grade potential,
- The maximum thickness of the kamafugite strata, key host rock of potential REE mineralisation, encountered during drilling is up to 70 metres, indicating a robust and potentially high-yielding mineralised zone, which underscores the significant resource potential of the project,
- The current exploration has successfully covered a significant portion of the CODA North tenements, which spans over 3,535 hectares, highlighting the vast expanse and impressive potential of this strategically important project,
- Sample assay analysis is ongoing at SGS Geosol laboratory with the first batch of results from substantial potential high-grade REE mineralised zones expected for release by mid-September, thereby further validating the geological continuity and enhancing the resource potential of the CODA North project,
- Enova is now concentrating on the next phase of resource definition drilling, with a strategic focus on expanding and fine-tuning the potential high-grade REE zones. This effort is geared towards advancing the CODA North project to a detailed resource estimation and paving the way for a scoping study for eventual economic extraction of REE minerals.

Enova Mining CEO Eric Vesel, commented on current drilling progress and the continued discovery of significant mineralised zones at CODA North,

“Exploration drilling has gained traction over the last month and is rapidly uncovering significant intercepts of potential REE mineralisation in kamafugite host rock. We all anxiously await the first batch of assays to be released around mid-September from over 1,500 samples currently being analysed at SGS Geosol.

Our decision to add a diamond drill rig in mid-July underscores our commitment to accelerating the campaign, advancing the project to the next phase by defining and expanding the mineralised zones for detailed resource estimation. At the same time, we are preparing samples for metallurgical characterisation and then leach testing. This foundational development work is necessary to recognising project viability, appreciating the value to our assets and our business. Our team is confident and capable of defining and establishing a scalable high-grade project at CODA North in a short-time frame. CODA North holds strong potential to establish Enova as a major player in the REE sector, significantly enhancing the global supply of critical rare earth metals. I extend my gratitude to our dedicated team for their exceptional efforts, and I look forward to providing further updates as we continue to advance this exciting project."

SIGNIFICANT REE MINERALISED ZONE INTERSECTED

Enova Mining Ltd has successfully completed its planned 14 diamond drill (DD) holes (Figure 2 and Figure 5), marking a significant milestone in our exploration campaign. These diamond drill holes have provided high-quality core samples essential for detailed geological analysis and resource estimation. The data collected is essential for validating the mineralisation model and refining our understanding of the deposit's potential. This accomplishment not only underscores our commitment to advancing the project but also enhances our ability to make informed decisions as we progress towards resource definition and development.



Figure 1: Vast expanse of exploration area of CODA North with subsurface REE mineralised zone (Drone footage)



Figure 2: Diamond drill rig is in operation in CODA North



Figure 3: Field data documentation by Enova's Professional Geology Team.

To date, Enova Mining Ltd has completed 21 reverse circulation (RC) drill holes (Figure 1, Figure 4, Figure 5 and Figure 6), significantly advancing our exploration efforts at the CODA North project. The RC drilling has enabled rapid and effective evaluation of mineralisation across a peripheral area compared to diamond drilling. This approach has provided critical insights into the distribution and grade of the mineralised zones, helping to delineate the extent of the resource and refine our geological models. The results from these RC drill holes are instrumental in validating our exploration strategy and will play a key role in advancing the project towards a comprehensive resource estimate and eventual development (subject to viability).



Figure 4: RC Drilling in action supported by drilling crew (Drone footage)

The RC drilling has been pivotal in confirming the continuity of high-grade mineralisation, complementing the data obtained from our diamond drilling program. This dual-drilling approach has enhanced our ability to map out the mineralised zones with greater accuracy and confidence, further de-risking the project and underscoring its potential. As we continue to analyse the data and integrate these findings into our resource models, we remain focused on maximising the value and strategic significance of the CODA North project.

A collar location plan of the drilling completed to date at CODA North is provided below in Figure 5. A total of 1,835 lineal metres has been drilled to date.

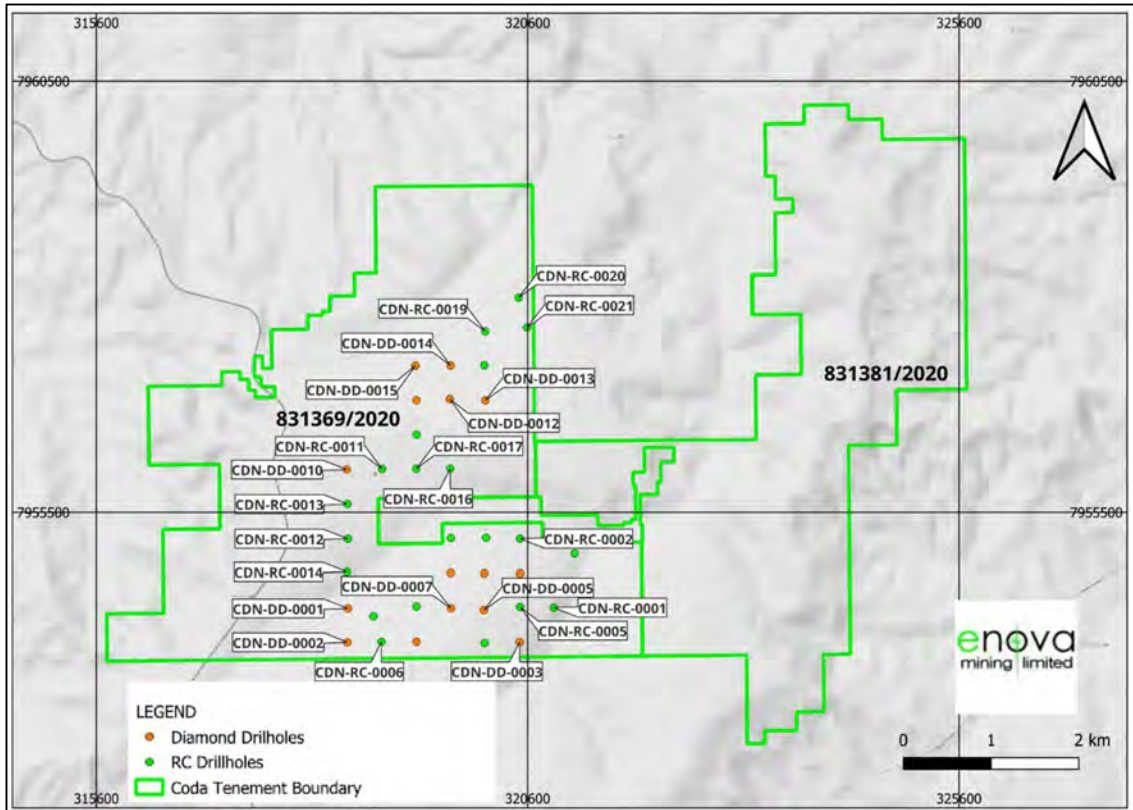


Figure 5: Drillhole locations in CODA North area

Enova's exploration efforts at CODA North have uncovered significant mineralised zones within the kamafugite lithostratigraphic units of the Patos formation, a component of the Cretaceous Mata Do Corda Group. This finding underscores the considerable potential for valuable REE mineral resources in the region, enhancing the project's promising outlook and strategic significance.

For personal use only



Figure 6: RC drilling in operation in CODA North



Figure 7: Very high magnetic susceptibility in saprolite from the hole CDN-RC-0012



Figure 8: Enova's professional geology team using dry riffle splitter for sub-sampling



Figure 9: Enova's professional geology team weighing samples

Over 1,500 drill samples have been dispatched to SGS Geosol laboratory in Vespasiano for assay analysis from Patos De Minas sample shade warehouse (see

Figure 10), including the samples already submitted in recent weeks. Enova's exploration team is meticulously overseeing the submission process and managing field activities to ensure efficient handling. Assay results will be announced as they are received.



Figure 10: Drill sample are being stacked under the protection of the Patos warehouse prior to dispatch to laboratory

MINERAL POTENTIAL OF CODA

The CODA tenements overlay the Patos geologic formation, with REE enriched Ionic Absorption Clays (IAC). Significant exploration drilling results from the CODA project¹ confirm the potential for REE enriched IAC in the Northern and Southern CODA tenements where drilling has been completed. The extent of the mineralised area at CODA North prospect is yet to be determined. All intersections from CODA South start from surface and are open in all directions including depth.

Enova is in discussions with metallurgical laboratories within Brazil and abroad to investigate the metallurgical character of the CODA mineralisation. Metallurgical samples have been provided to a local laboratory for processing. CODA is well placed with mineralised zones of IAC with exceptionally high REE grade. This is underpinned by CODA's potential for broad areas of mineralised zones of exceptional thickness which translate to a significant resource base giving longevity to future extractive operations.

¹ ASX announcement, "World Class Clay hosted rare earth grade uncovered at Coda North", 18 March 2024

REGIONAL GEOLOGY AND TENEMENT OVERVIEW

Enova is encouraged by the location and size of the tenements in relation to prospective geological features. The prospective geological unit present in the CODA project is composed of the Patos Formation. It formed during the Upper Cretaceous period, when a massive volcanic event occurred in the western part of Minas Gerais state. The volcanic activity exhibited both effusive (lava flows) and explosive (pyroclastic deposits) eruptions. The predominant rock type in this formation is kamafugite, which is classified as an alkaline-ultramafic rock. High-grade REE are also enriched in this formation.

The prospective unit consists of a horizontal bed of kamafugite, which can be up to 40 metres thick, overlain by overburden that varies from 0 to 50 metres. Weathering processes with thick clay zones are prevalent throughout this profile, leading to the accumulation of REE closer to the upper part of the formation. The rocks within this formation are predominantly soft and friable, with an extremely fine particle size. These characteristics are considered advantageous for the exploration of Ionic Clay REE deposits. (Refer to Figure 11 below for the locations of the tenements at the CODA Project.)

TENEMENTS/PERMITS

The title holder of the tenements is RBM Consultoria Mineral, who filed transfer requests of the granted exploration permits to its sole owner, Rodrigo de Brito Mello. The application cannot be transferred until the permit is published, however Rodrigo and RBM Consultoria Mineral will undertake contractual obligations to transfer the title to Enova as soon as the permit is published in the official gazette. Details of the CODA tenements are provided in the following table.

License ID	Area (Ha)	Ownership	In transference to	Status
831381-2020	1,537.60	RBM CONSULTORIA MINERAL LTDA	Rodrigo De Brito Mello	Granted
831369-2020	1,997.80	RBM CONSULTORIA MINERAL LTDA	Rodrigo De Brito Mello	Granted
830699-2021	1,999.80	RBM CONSULTORIA MINERAL LTDA	Rodrigo De Brito Mello	Granted
830737-2021	1,999.60	RBM CONSULTORIA MINERAL LTDA	Rodrigo De Brito Mello	Granted
831598-2020	1,807.80	RBM CONSULTORIA MINERAL LTDA	Rodrigo De Brito Mello	Granted
831388-2020	1,999.60	RBM CONSULTORIA MINERAL LTDA	Rodrigo De Brito Mello	Granted
830691-2021	1,992.80	RBM CONSULTORIA MINERAL LTDA	Rodrigo De Brito Mello	Granted
830698-2021	1,997.40	RBM CONSULTORIA MINERAL LTDA	Rodrigo De Brito Mello	Granted
	15,332.40			

Table 1: CODA Project tenements Minas Gerais, Brazil

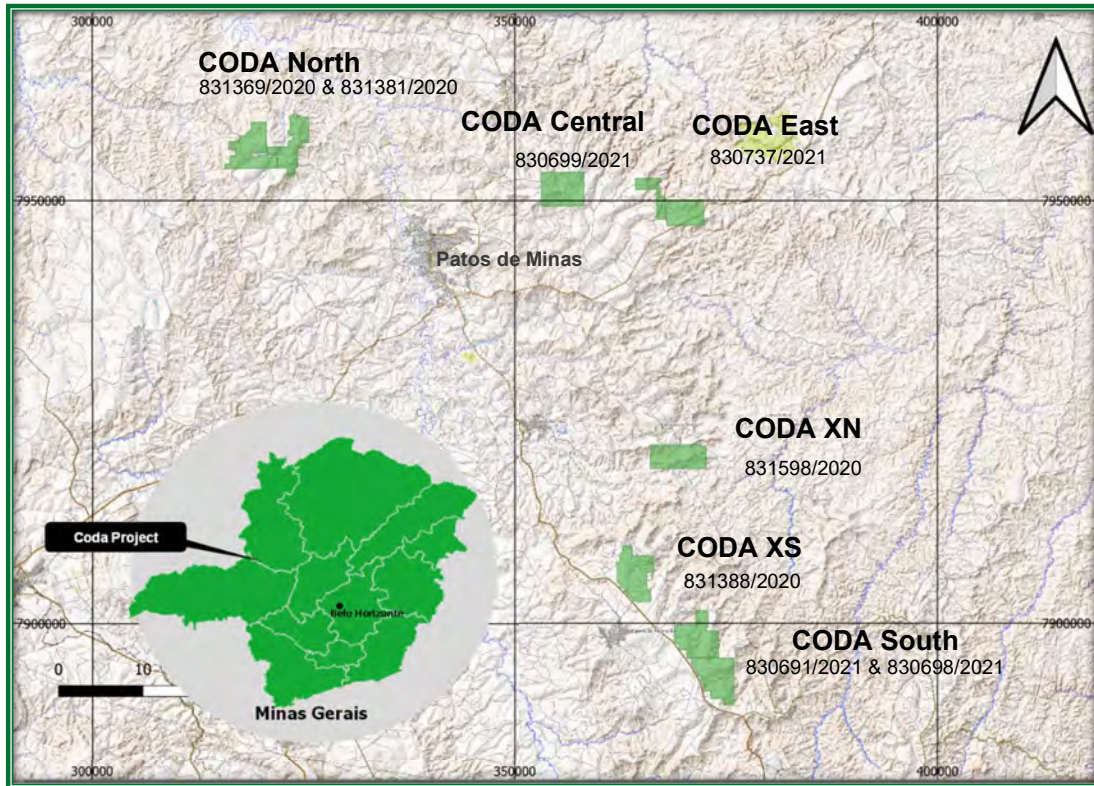


Figure 11: The CODA REE project tenements (100% ENV) Minas Gerais, Brazil

ATTRACTIVE BUSINESS ENVIRONMENT

Brazil has a developed and sophisticated mining industry, and is amongst the leading exporters of iron ore, tin, bauxite, manganese, copper, gold, rare earth, and lithium. The country investment risk is considered low and business environment as secure, based on:

- Mining is recognised as a key economic industry in Brazil and the State of Minas Gerais,
- Progressive mining policies, seeking investment, encouraging explorers and new developments,
- Mining investment free of government mandated ownership,
- Low sovereign risk and government interference,
- Attractive cost base and sophisticated support network for the mining industry,
- High level of exploration/mining technical skills and expertise in country.

MANAGING OUR COMMITMENTS

Enova is currently focussed on completing its exploration drilling program at the CODA North project. Enova also remains committed to the development of Charley Creek rare earth project with ongoing activities proceeding without disruption.

The Company will also continue to review projects and business opportunities as they arise.

Enova has a new website, updated with our Brazilian projects. The web address remains the same, www.enovamining.com.

The market will be kept apprised of developments, as required under ASX Listing Rules and in accord with continuous disclosure requirements.

Approved for release by the Board of Enova Mining Limited



Eric Vesel,
Enova Mining Limited
CEO/ Executive Director

Contact:
eric@enovamining.com

Competent Person Statement

The information related to Exploration Targets and Exploration Results is based on data compiled by Subhajit Deb Roy, a Competent Person and Chartered Professional Member of The Australasian Institute of Mining and Metallurgy. Mr Deb Roy is currently working as Exploration Manager with Enova Mining. Mr. Deb Roy has over 20 years of geological experience in the mining industry in range of mineral commodities and geological settings. He has sufficient experience that is relevant to the style of mineralisation and type of deposits under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr. Deb Roy consents to the inclusion in presenting the matters based on his information in the release.

Forward-looking statements

This announcement contains forward-looking statements which involve a number of risks and uncertainties. These forward-looking statements are expressed in good faith and believed to have a reasonable basis. These statements reflect current expectations, intentions or strategies regarding the future and assumptions based on currently available information. Should one or more of the risks or uncertainties materialise, or should underlying assumptions prove incorrect, actual results may vary from the expectations, intentions and strategies described in this announcement. No obligation is assumed to update forward looking statements if these beliefs, opinions and estimates should change or to reflect other future developments.

Precautionary Statement

The information contained in this announcement regarding the exploration results at CODA North is based on data collected from diamond and reverse circulation (RC) drilling programs. While the identification of significant mineralised zones within the Patos formation of the Mata Do Corda Group suggests the potential for Rare Earth Element (REE) mineral resources, it is important to note the following cautionary considerations. The project is currently at an exploration stage, and while initial drilling results are promising, further exploration and evaluation are necessary to ascertain the extent, quality, and economic viability of the mineral resources. Potential mineralisation identified by sampling in drill holes is currently undergoing comprehensive assaying, mineralogical evaluation, structural analysis and metallurgical test work. Until these analyses are completed, surety of resource estimates in the future remains speculative.

For personal use only

Disclaimer

This ASX announcement (Announcement) has been prepared by Enova Mining Limited ("Enova" or "the Company"). It should not be considered as an offer or invitation to subscribe for or purchase any securities in the Company or as an inducement to make an offer or invitation with respect to those securities. No agreement to subscribe for securities in the Company will be entered into on the basis of this Announcement.

This Announcement contains summary information about Enova, its subsidiaries, and their activities, which is current as at the date of this Announcement. The information in this Announcement is of a general nature and does not purport to be complete nor does it contain all the information which a prospective investor may require in evaluating a possible investment in Enova.

By its very nature exploration for minerals is a high-risk business and is not suitable for certain investors. Enova's securities are speculative. Potential investors should consult their stockbroker or financial advisor. There are many risks, both specific to Enova and of a general nature which may affect the future operating and financial performance of Enova and the value of an investment in Enova including but not limited to economic conditions, stock market fluctuations, commodity price movements, regional infrastructure constraints, timing of approvals from relevant authorities, regulatory risks, operational risks and reliance on key personnel.

Certain statements contained in this announcement, including information as to the future financial or operating performance of Enova and its projects, are forward-looking statements that: may include, among other things, statements regarding targets, estimates and assumptions in respect of mineral reserves and mineral resources and anticipated grades and recovery rates, production and prices, recovery costs and results, capital expenditures, and are or may be based on assumptions and estimates related to future technical, economic, market, political, social and other conditions; are necessarily based upon a number of estimates and assumptions that, while considered reasonable by Enova, are inherently subject to significant technical, business, economic, competitive, political and social uncertainties and contingencies; and, involve known and unknown risks and uncertainties that could cause actual events or results to differ materially from estimated or anticipated events or results reflected in such forward-looking statements.

Enova disclaims any intent or obligation to update publicly any forward-looking statements, whether because of new information, future events, or results or otherwise. The words 'believe', 'expect', 'anticipate', 'indicate', 'contemplate', 'target', 'plan', 'intends', 'continue', 'budget', 'estimate', 'may', 'will', 'schedule' and similar expressions identify forward-looking statements. All forward-looking statements made in this announcement are qualified by the foregoing cautionary statements. Investors are cautioned that forward-looking statements are not guarantee of future performance and accordingly investors are cautioned not to put undue reliance on forward-looking statements due to the inherent uncertainty therein. No verification: although all reasonable care has been undertaken to ensure that the facts and opinions given in this Announcement are accurate, the information provided in this Announcement has not been independently verified

**APPENDIX A
JORC TABLE 1**

Section 1 - Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> • <i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> • <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> • <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> • <i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i> 	<p>Coda North consisting of 831369/2020 and 831381/2020 areas were sampled using a diamond drill rig, and a Reverse Circulation drill rig.</p> <p>Diamond drillholes</p> <p>The drill cores representing in-situ rocks are collected in plastic core trays, and depth markers record the depth at the end of each drill run. In the initial holes composite sample was collected for 2m or 4m or longer intervals in the unmineralised or less mineralised overburden litho-stratigraphic unit which is undifferentiated detritus and/or lateritised cover.</p> <p>Samples were collected at every 1m for underlying mineralised zone in Patos formation.</p> <p>In the unconsolidated drill samples, the core was halved with a metal spatula and bagged in plastic bags, while a powered saw halved the hard and consolidated rock, bagged, and each sample was tagged with sample number.</p> <p>Reverse Circulation (RC) drillholes</p> <p>2m or 4m or longer composite sample was collected in the unmineralised or less mineralised overburden litho-stratigraphic unit which is undifferentiated detritus and/or lateritised cover.</p> <p>Samples were collected at every 1m for underlying mineralised zone in Patos formation.</p> <p>All samples were sent for preparation to the contracted laboratories, SGS Geosol in Vespasian, MG, Brazil.</p> <p>The undifferentiated detritus cover layer has been visually differentiated from kamafugite of Patos formation by professional geologist and additionally, magnetic susceptibility test carried out to differentiate the kamfugite litho-unit within Patos formation from overlying and underlying formations.</p>
Drilling techniques	<ul style="list-style-type: none"> • <i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i> 	<p>Diamond Drillholes</p> <p>Diamond drilling was carried out by Maquesonda MACH 1210 rig, drilling vertically and sampled generally at intervals of 1.0m within the mineralised strata. The drilling used a wireline diamond core of HQ diameter of 2.63 inches (core diameter).</p> <p>Drilling of each hole was conducted by the diamond core rig and terminated upon intercepting between 1 to 10 meters of Areado Group, indicative of penetration into the underlying unmineralised or less mineralised zone.</p> <p>Reverse Circulation Drillholes</p> <p>RC drilling was conducted using with a 4.75-inch diameter downhole rigs.</p> <p>The drill site preparation included clearing, levelling the ground, and delineating the drilling area. The RC drilling was terminated upon</p>

		<p>intercepting between 1 to 10 meters of Areado Group, indicative of penetration into the underlying unmineralised or less mineralised zone.</p> <p>Diamond drilling was predominantly used for establishing the extent of the ore body while RC drilling being used to test the continuity of mineralised zone between diamond drillholes.</p>
<p><i>Drill sample recovery</i></p>	<ul style="list-style-type: none"> • <i>Method of recording and assessing core and chip sample recoveries and results assessed.</i> • <i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i> • <i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i> 	<p>Recovery in Diamond Drillholes</p> <p>Calculated after each run, comparing the length of core recovery vs. drill depth. Overall core recoveries are above 90% in diamond drilling.</p> <p>Recovery in RC drillholes</p> <p>Every 1m sample in the mineralised strata is collected in plastic bags and weighed (Figure 9). Each sample averages approximately 6-12kg, which is considered acceptable given the hole diameter and the specific density of the material. However, the recovery was initially above 50% due to high clay content in the strata and later holes the recovery of drill cuttings increased up to 70%.</p> <p>Any sample bias due to low recovery will be determined after the assay and mineral characterisation completed.</p>
<p><i>Logging</i></p>	<ul style="list-style-type: none"> • <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> • <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> • <i>The total length and percentage of the relevant intersections logged.</i> 	<p>Diamond Drillholes</p> <p>Lithological descriptions (Appendix -2 Table 3) are carried out at site or in Enova's warehouse facility by professional geologist, covering the pedolith, saprolite, SAP rock and underlying Areado group and the contacts. Parameters logged include grain size, texture, colour, mineralogy, magnetism, type of alterations (hydrothermal or weathering) and type of lithologic contact, which can help to identify the parent rock before weathering.</p> <p>All drill holes are photographed and stored at the core facility in Patos De Minas.</p> <p>Reverse Circulation Drillholes</p> <p>A professional geologist logs the material at the drill site or in the Enova's warehouse facility, covering the pedolith, saprolite, SAP rock and Areado group and the contacts. Other parameters recorded include grain size, texture, and colour, which can help identify the parent rock before weathering.</p> <p>Due to the nature of the drilling, sampling is done at 1m intervals within the mineralised zone. 1m samples weighing approximately 6-12kg (Figure 9) are collected in a bucket and presented for sampling and logging. The average weight improved to 15kg with increasing recovery of samples.</p> <p>The chip trays of all drilled holes have a digital photographic record and are stored at the Enova's warehouse facility in Patos De Minas.</p>
<p><i>Sub-sampling techniques and sample preparation</i></p>	<ul style="list-style-type: none"> • <i>If core, whether cut or sawn and whether quarter, half or all cores taken.</i> • <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i> • <i>For all sample types, the nature,</i> 	<p>Diamond Drillholes</p> <p>Collection and labelling: Samples of diamond cores are taken at 1.0m intervals from mineralised kamafugite lithological unit</p> <p>The cores are split longitudinally using a spatula for unconsolidated portions or using riffle splitter (Figure 8) and a rock-cutting saw for hard rock.</p> <p>The samples were placed in labelled plastic bags and in the process</p>

	<p>quality, and appropriateness of the sample preparation technique.</p> <ul style="list-style-type: none"> Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<p>of dispatching to SGS Geosol laboratory in Vespasiano.</p> <p>Field Duplicates: Duplicates are taken approximately every 20 samples using quarter core for QA/QC procedures</p> <p>Reverse Circulation (RC) Drillholes</p> <p>RC drillholes samples are currently sent to SGS Geosol Laboratory for preparation and subsampling. SGS Geosol laboratory follows industry standard protocols for sub-sampling procedure.</p> <p>The sample assays will be conducted in the following method</p> <p>SGS Laboratory</p> <p>At the lab, SGS-Geosol commercial laboratory, in Vespasiano, the samples are dried at 60^o or 105^o C, 75% material crushed to a nominal 3mm using a jaw crusher before being split using Jones riffle splitter for pulverising.</p> <p>The aliquots are pulverised to a nominal >95% of 300g passing 150 micron for which a 100g sample is then selected for analysis. A spatula is used to sample from the pulverised sample for digestion.</p> <p>Quality Control: The laboratory follows strict quality control procedures, ensuring the accuracy and precision of the assay data. Internally, the laboratory uses duplicate assays, standards, and blanks to maintain quality.</p>																																																																						
<p>Quality of assay data and laboratory tests</p>	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<p>Samples are analysed at the SGS Geosol laboratory in batches of approximately 100 samples including control samples (duplicate, blank, and standards).</p> <p>Industry standard protocols are used by SGS-Geosol to prepare the samples for analysis. Samples are dried, and a sub sample of 300g was pulverised. For rare earth element analysis, samples are prepared with lithium/Metaborate fusion and are analysed by Inductively Coupled Plasma Mass Spectrometry (ICP-MS) or Inductively Coupled Plasma Optical Emission Spectrometry (ICP-OES).</p> <p>3.1) ICP95A</p> <table border="1"> <thead> <tr> <th colspan="4">Determinação por Fusão com Metaborato de Lítio - ICP OES</th> <th>PM-0000373</th> </tr> </thead> <tbody> <tr> <td>Al₂O₃ 0.01 - 75 (%)</td> <td>Ba 10 - 100000 (ppm)</td> <td>CaO 0.01 - 60 (%)</td> <td>Cr₂O₃ 0.01 - 10 (%)</td> <td></td> </tr> <tr> <td>Fe₂O₃ 0.01 - 75 (%)</td> <td>K₂O 0.01 - 25 (%)</td> <td>MgO 0.01 - 30 (%)</td> <td>MnO 0.01 - 10 (%)</td> <td></td> </tr> <tr> <td>Na₂O 0.01 - 30 (%)</td> <td>P₂O₅ 0.01 - 25 (%)</td> <td>SiO₂ 0.01 - 90 (%)</td> <td>Sr 10 - 100000 (ppm)</td> <td></td> </tr> <tr> <td>TiO₂ 0.01 - 25 (%)</td> <td>V 5 - 10000 (ppm)</td> <td>Zn 5 - 10000 (ppm)</td> <td>Zr 10 - 100000 (ppm)</td> <td></td> </tr> </tbody> </table> <p>3.2) IMS95A</p> <table border="1"> <thead> <tr> <th colspan="4">Determinação por Fusão com Metaborato de Lítio - ICP MS</th> <th>PM-0000373</th> </tr> </thead> <tbody> <tr> <td>Ce 0.1 - 10000 (ppm)</td> <td>Co 0.5 - 10000 (ppm)</td> <td>Cs 0.05 - 1000 (ppm)</td> <td>Cu 5 - 10000 (ppm)</td> <td></td> </tr> <tr> <td>Dy 0.05 - 1000 (ppm)</td> <td>Er 0.05 - 1000 (ppm)</td> <td>Eu 0.05 - 1000 (ppm)</td> <td>Ga 0.1 - 10000 (ppm)</td> <td></td> </tr> <tr> <td>Gd 0.05 - 1000 (ppm)</td> <td>Hf 0.05 - 500 (ppm)</td> <td>Ho 0.05 - 1000 (ppm)</td> <td>La 0.1 - 10000 (ppm)</td> <td></td> </tr> <tr> <td>Lu 0.05 - 1000 (ppm)</td> <td>Mg 2 - 10000 (ppm)</td> <td>Nb 0.05 - 1000 (ppm)</td> <td>Nd 0.1 - 10000 (ppm)</td> <td></td> </tr> <tr> <td>Ni 5 - 10000 (ppm)</td> <td>Pr 0.05 - 1000 (ppm)</td> <td>Rb 0.2 - 10000 (ppm)</td> <td>Sm 0.1 - 1000 (ppm)</td> <td></td> </tr> <tr> <td>Sn 0.3 - 1000 (ppm)</td> <td>Ta 0.05 - 10000 (ppm)</td> <td>Tb 0.05 - 1000 (ppm)</td> <td>Th 0.1 - 10000 (ppm)</td> <td></td> </tr> <tr> <td>Tl 0.5 - 1000 (ppm)</td> <td>Tm 0.05 - 1000 (ppm)</td> <td>U 0.05 - 10000 (ppm)</td> <td>W 0.1 - 10000 (ppm)</td> <td></td> </tr> <tr> <td>Y 0.05 - 10000 (ppm)</td> <td>Yb 0.1 - 1000 (ppm)</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> <p>QA/QC samples are included amongst the submitted samples. Both standards, duplicates and blank QA/QC samples were included in the sample submission.</p> <p>Oreas 460 and Oreas 461 samples sent from Australia were used in 12gm package as certified reference material at an interval every 15-20 samples.</p> <p>The assays were done using ICP MS, ICP AES after Fusion with Lithium Metaborate - ICP MS for major Oxides.</p>	Determinação por Fusão com Metaborato de Lítio - ICP OES				PM-0000373	Al ₂ O ₃ 0.01 - 75 (%)	Ba 10 - 100000 (ppm)	CaO 0.01 - 60 (%)	Cr ₂ O ₃ 0.01 - 10 (%)		Fe ₂ O ₃ 0.01 - 75 (%)	K ₂ O 0.01 - 25 (%)	MgO 0.01 - 30 (%)	MnO 0.01 - 10 (%)		Na ₂ O 0.01 - 30 (%)	P ₂ O ₅ 0.01 - 25 (%)	SiO ₂ 0.01 - 90 (%)	Sr 10 - 100000 (ppm)		TiO ₂ 0.01 - 25 (%)	V 5 - 10000 (ppm)	Zn 5 - 10000 (ppm)	Zr 10 - 100000 (ppm)		Determinação por Fusão com Metaborato de Lítio - ICP MS				PM-0000373	Ce 0.1 - 10000 (ppm)	Co 0.5 - 10000 (ppm)	Cs 0.05 - 1000 (ppm)	Cu 5 - 10000 (ppm)		Dy 0.05 - 1000 (ppm)	Er 0.05 - 1000 (ppm)	Eu 0.05 - 1000 (ppm)	Ga 0.1 - 10000 (ppm)		Gd 0.05 - 1000 (ppm)	Hf 0.05 - 500 (ppm)	Ho 0.05 - 1000 (ppm)	La 0.1 - 10000 (ppm)		Lu 0.05 - 1000 (ppm)	Mg 2 - 10000 (ppm)	Nb 0.05 - 1000 (ppm)	Nd 0.1 - 10000 (ppm)		Ni 5 - 10000 (ppm)	Pr 0.05 - 1000 (ppm)	Rb 0.2 - 10000 (ppm)	Sm 0.1 - 1000 (ppm)		Sn 0.3 - 1000 (ppm)	Ta 0.05 - 10000 (ppm)	Tb 0.05 - 1000 (ppm)	Th 0.1 - 10000 (ppm)		Tl 0.5 - 1000 (ppm)	Tm 0.05 - 1000 (ppm)	U 0.05 - 10000 (ppm)	W 0.1 - 10000 (ppm)		Y 0.05 - 10000 (ppm)	Yb 0.1 - 1000 (ppm)			
Determinação por Fusão com Metaborato de Lítio - ICP OES				PM-0000373																																																																				
Al ₂ O ₃ 0.01 - 75 (%)	Ba 10 - 100000 (ppm)	CaO 0.01 - 60 (%)	Cr ₂ O ₃ 0.01 - 10 (%)																																																																					
Fe ₂ O ₃ 0.01 - 75 (%)	K ₂ O 0.01 - 25 (%)	MgO 0.01 - 30 (%)	MnO 0.01 - 10 (%)																																																																					
Na ₂ O 0.01 - 30 (%)	P ₂ O ₅ 0.01 - 25 (%)	SiO ₂ 0.01 - 90 (%)	Sr 10 - 100000 (ppm)																																																																					
TiO ₂ 0.01 - 25 (%)	V 5 - 10000 (ppm)	Zn 5 - 10000 (ppm)	Zr 10 - 100000 (ppm)																																																																					
Determinação por Fusão com Metaborato de Lítio - ICP MS				PM-0000373																																																																				
Ce 0.1 - 10000 (ppm)	Co 0.5 - 10000 (ppm)	Cs 0.05 - 1000 (ppm)	Cu 5 - 10000 (ppm)																																																																					
Dy 0.05 - 1000 (ppm)	Er 0.05 - 1000 (ppm)	Eu 0.05 - 1000 (ppm)	Ga 0.1 - 10000 (ppm)																																																																					
Gd 0.05 - 1000 (ppm)	Hf 0.05 - 500 (ppm)	Ho 0.05 - 1000 (ppm)	La 0.1 - 10000 (ppm)																																																																					
Lu 0.05 - 1000 (ppm)	Mg 2 - 10000 (ppm)	Nb 0.05 - 1000 (ppm)	Nd 0.1 - 10000 (ppm)																																																																					
Ni 5 - 10000 (ppm)	Pr 0.05 - 1000 (ppm)	Rb 0.2 - 10000 (ppm)	Sm 0.1 - 1000 (ppm)																																																																					
Sn 0.3 - 1000 (ppm)	Ta 0.05 - 10000 (ppm)	Tb 0.05 - 1000 (ppm)	Th 0.1 - 10000 (ppm)																																																																					
Tl 0.5 - 1000 (ppm)	Tm 0.05 - 1000 (ppm)	U 0.05 - 10000 (ppm)	W 0.1 - 10000 (ppm)																																																																					
Y 0.05 - 10000 (ppm)	Yb 0.1 - 1000 (ppm)																																																																							

<p>Verification of sampling and assaying</p>	<ul style="list-style-type: none"> • <i>The verification of significant intersections by either independent or alternative company personnel.</i> • <i>The use of twinned holes.</i> • <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> • <i>Discuss any adjustment to assay data.</i> 	<p>Enova's Brazilian team of professional geologist (Figure 7) has reviewed the data collated and compared with electronic copies to verify the accuracy. Assay data, in electronic form, is checked to verify to ensure the datafiles are correctly handled in spreadsheets where calculations are needed. The process of verifying sampling and assaying is still ongoing as drilling progresses.</p> <p>This was a maiden drilling program by Enova. Hence, twinned holes were not drilled to verify the representation of historical drill data.</p> <p>2m or 4m or longer interval composite samples of the overburden strata of undifferentiated detritus and/or lateritised cover. 1m samples taken from the mineralised zone of kamafugite within Patos formation Field geological data was recorded on logs (Appendix 2 Table 3) and typed into a spreadsheet for subsequent import to a database.</p> <p>Assay data is received in spreadsheet form from the laboratory</p>
<p>Location of data points</p>	<ul style="list-style-type: none"> • <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> • <i>Specification of the grid system used.</i> • <i>Quality and adequacy of topographic control.</i> 	<p>The drill hole collars were picked up using a Garmin handheld GPS. Datum for all sitework is considered SIRGAS 2000, Zone 23 South or WGS 84 UTM Zone 23S. The error in the handheld GPS is around ±3m (Appendix 1, Table 2).</p> <p>This universal grid system facilitates consistent data interpretation and integration with other geospatial datasets.</p>
<p>Data spacing and distribution</p>	<ul style="list-style-type: none"> • <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i> 	<p>The average spacing between adjacent planned holes is about 400m x 400 m, varied according to the extent, width, and length of the tenements.</p> <p>Diamond drilling is to provide insights into extent of the potential mineralised zones. The exploratory nature of the diamond drilling further supports the overall geological understanding. Hence, they are drilled at larger spacings 400m x 400m. However, the current holes are being drilled at the margin of the grid which put the holes apart by more than 400 m spacings.</p> <p>Reverse circulation (RC) drilling carried out on a structured grid with a 400 x 400 metres spacing. This grid pattern is tailored to enhancing our understanding of the mineral distribution and geological continuity across the target zone. The grid spacing may be adjusted according to the outcome of intersects of mineralised zone in each hole.</p> <p>2m or 4m or longer interval sample compositing was used to produce a sample for assay unmineralised and less mineralised overburden zone. No other compositing of samples done at this stage.</p> <p>No resources are reported.</p>
<p>Orientation of data in relation to geological structure</p>	<ul style="list-style-type: none"> • <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have</i> 	<p>Mineralisation is moderately flat lying. The drillholes are vertical, which is closely perpendicular to mineralised horizons.</p> <p>Vertical drillholes are considered appropriate due to the characteristics of the deposit. The deposit is a supergene enrichment type with a greater horizontal extent compared to the thickness of the mineralised body. This kind of deposit is typically expansive horizontally with a relatively uniform thickness.</p> <p>There is no evidence that the drilling orientation has introduced any sampling bias regarding the critical mineralised structures. The drilling</p>

	<i>introduced a sampling bias, this should be assessed and reported if material.</i>	orientation is well-aligned with the known geology of the deposit, ensuring accurate representation and unbiased sampling of the mineralized zones. Any potential bias due to drilling orientation is considered negligible in this context.
Sample security	<ul style="list-style-type: none"> <i>The measures taken to ensure sample security.</i> 	All samples were collected by field personnel and meticulously packed in labelled plastic bags. They were then transported directly to the SGS-GEOSOL in Brazil. The samples were secured during transit to prevent tampering, contamination, or loss. A chain of custody was maintained from the field to the laboratory, with proper documentation accompanying each batch to ensure transparency and traceability throughout the sampling process. Utilising a reputable laboratory further ensures the security and integrity of the assay results.
Audits or reviews	<ul style="list-style-type: none"> <i>The results of any audits or reviews of sampling techniques and data.</i> 	The site is attended by Enova's Brazilian Professional Geology Team to inspect drilling and sampling procedures, verify survey methods, inspect the storage shed, verification geological records, review QAQC procedures and review the geologic model.

Section 2 - Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<p>The title holder of the tenements is RBM Consultoria Mineral, who filed transfer requests of the granted exploration permits to its sole owner, Rodrigo de Brito Mello. The application cannot be transferred until the permit is published, however Rodrigo and RBM Consultoria Mineral will undertake contractual obligations to transfer the title to Enova as soon as the permit is published in the official gazette. Details of the CODA tenements are provided in the following table (Table 1).</p> <p>The current exploration is taking place in Coda North area consisting of tenements 831369/2020 and 831381/2020.</p> <p>Enova has submitted the required fees and annual reports of the above tenements to ANM on and before 2 August 2024 and the renewal of the tenements is under process through to the next year.</p>
Exploration done by other parties	<ul style="list-style-type: none"> <i>Acknowledgment and appraisal of exploration by other parties.</i> 	The area was earlier explored by Vicenza and the significant results of historical drilling of Coda North is announced via ASX release ² dated 18 March 2024
Geology	<ul style="list-style-type: none"> <i>Deposit type, geological setting and style of mineralisation.</i> 	The prospective geological unit present in the CODA project is composed of the Patos formation. It formed during the Upper Cretaceous period, when a massive volcanic event occurred in the western part of Minas Gerais state. The volcanic activity exhibited both effusive (lava flows) and explosive (pyroclastic deposits) eruptions. The predominant rock type in this formation is kamafugite, which is classified as an alkaline-ultramafic rock. High-grade REE are also enriched in this formation.

² ASX announcement "World class clay hosted rare earth grades uncovered at coda north" dated 18 March 2024

		<p>The prospective unit consists of a horizontal bed of kamafugite, which can be up to 40 metres thick, overlain by overburden that varies from 0 to 50 metres. Weathering processes with thick clay zones are prevalent throughout this profile, leading to the accumulation of REE closer to the upper part of the formation. The rocks within this formation are predominantly soft and friable, with an extremely fine particle size. These characteristics are considered advantageous for the exploration of Ionic Clay REE deposits.</p>
<p><i>Drill hole Information</i></p>	<ul style="list-style-type: none"> • <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> • <i>easting and northing of the drill hole collar</i> • <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> • <i>dip and azimuth of the hole</i> • <i>down hole length and interception depth</i> • <i>hole length.</i> • <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	<p>The data and information of about the drillholes are given below,</p> <p>Total number of holes completed.</p> <p>Diamond Drill holes 14</p> <p>RC drillholes 21</p> <p>Refer, Appendix 1 Table2 for Drillhole Collar Information</p>
<p><i>Data aggregation methods</i></p>	<ul style="list-style-type: none"> • <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> • <i>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> • <i>The assumptions used for any reporting of metal equivalent</i> 	<p>The data will be compiled in Collar, Survey and Geology files. Once Assay will be received the Assay data will be compiled in the Assay table. The database will be compiled as per industry best practices and for the use of resource modelling in the next stage.</p> <p>The conversion of Total Rare Earth Oxide (TREO) will be calculated using standard conversion table as mentioned below.</p> <p>The conversion of elemental assay results to expected common rare earth oxide products, uses conversion factors applied relating to the atomic composition of common rare earth oxide sale products. The following calculation for TREO provides REE to RE oxide conversion factors and lists the REE included:</p> <p>TREO=</p> <p>(Ce*1.23) +(Dy*1.15) +(Er*1.14) +(Gd*1.15)</p> <p>+(Ho*1.15) +(La*1.17) +(Lu*1.14) +(Nd*1.17) +(Pr*1.21) +(Sm*1.16)</p> <p>+(Tb*1.18) +(Tm*1.14)</p> <p>+(Y*1.27) +(Yb*1.14)</p>

	<p><i>values should be clearly stated.</i></p>	
<p><i>Relationship between mineralisation widths and intercept lengths</i></p>	<ul style="list-style-type: none"> • <i>These relationships are particularly important in the reporting of Exploration Results.</i> • <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> • <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i> 	<p>Due to the geometry of the mineralisation, the vertical orientation of the drill holes, the downhole lengths are likely to be close approximations of the true widths of the mineralised zones.</p> <p>In instances where discrepancies between downhole lengths and true widths may occur, it should be noted as "downhole thickness or length, not the true width".</p> <p>All drill holes are vertical and suitable for the deposit type, ensuring unbiased sampling of the mineralisation</p>
<p><i>Diagrams</i></p>	<ul style="list-style-type: none"> • <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<p>The data provided in this report aids readers in comprehending the information more effectively. The document includes various diagrams and supplementary details, which enhance the clarity and accessibility of the geological findings and exploration results. Please refer to the Figure 1 to 9 for drilling, sampling related data and information and Figure 11 for Coda North tenement and Figure 5 for drillhole locations.</p>
<p><i>Balanced reporting</i></p>	<ul style="list-style-type: none"> • <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<p>The data presented in this report aims to offer a transparent and comprehensive overview of the exploration activities and findings. It thoroughly covers information on sampling techniques, geological context, prior exploration work, and assay results. Relevant cross-references to previous announcements are included to ensure continuity and clarity. Diagrams, such as drillhole plan and tenements maps and tables, are provided to facilitate a deeper understanding of the data.</p> <p>Additionally, the report distinctly mentions the source of the samples, whether from saprolitic clays, kamafugite lithounits under Patos formation, to ensure a balanced perspective. This report represents the exploration activities and findings without any undue bias or omission.</p>
<p><i>Other substantive exploration data</i></p>	<ul style="list-style-type: none"> • <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<p>There is no additional substantive, relevant and significant exploration data to report currently.</p>

<p><i>Further work</i></p>	<ul style="list-style-type: none">• <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i>• <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive</i>	<p>In the current stage, resource delineation drilling is focused on systematically mapping the extent and continuity of the mineralised zones identified during initial exploration. This involves both infill and step-out drilling to provide detailed information on the grade and distribution of the mineralised zones, reducing geological uncertainty and will improve the confidence and accuracy of the resource model in the next stage.</p> <p>As we move to the next stage, resource definition will take precedence, leading to a compliant mineral resource estimate.</p> <p>Diagrams and figures in the current document entail the future infill drilling requirement in the gaps to enhance the confidence on geological and grade continuity and resource categorisation.</p>
----------------------------	---	--

Appendix -1

The drillholes completed in Coda North Area

HoleID	Project	Target	East_UTM	North_UTM	Elev	Datum	Zone	DIP	EOH (m)	DrillType
CDN-DD-0001	CODA	North	318514.2430	7954393.1180	1016.1750	WGS84	23S	90	39.36	DD
CDN-DD-0002	CODA	North	318509.1070	7954000.7770	1045.5960	WGS84	23S	90	57.1	DD
CDN-DD-0003	CODA	North	320507.1210	7954002.0970	1032.5940	WGS84	23S	90	53.42	DD
CDN-DD-0004	CODA	North	320513.5940	7954795.2570	1042.5720	WGS84	23S	90	79.9	DD
CDN-DD-0005	CODA	North	320092.7850	7954374.7610	1073.7280	WGS84	23S	90	81.21	DD
CDN-DD-0006	CODA	North	319310.2090	7954006.5060	1057.6750	WGS84	23S	90	81.11	DD
CDN-DD-0007	CODA	North	319709.8490	7954395.9390	1061.3830	WGS84	23S	90	61.81	DD
CDN-DD-0008	CODA	North	320096.4060	7954796.8600	1052.6370	WGS84	23S	90	63.09	DD
CDN-DD-0009	CODA	North	319706.8580	7954801.5940	1048.2030	WGS84	23S	90	59.45	DD
CDN-DD-0010	CODA	North	318501.9340	7955997.4790	1063.5790	WGS84	23S	90	68.65	DD
CDN-DD-0011	CODA	North	319309.7230	7956800.6830	1019.8230	WGS84	23S	90	45.89	DD
CDN-DD-0012	CODA	North	319697.1410	7956813.4230	1056.7030	WGS84	23S	90	43.31	DD
CDN-DD-0013	CODA	North	320110.3640	7956800.2750	1064.6670	WGS84	23S	90	54.27	DD
CDN-DD-0014	CODA	North	319705.8060	7957204.4650	1047.4190	WGS84	23S	90	36.24	DD
CDN-DD-0015	CODA	North	319298.1050	7957202.3820	956.8120	WGS84	23S	90	27.71	DD
CDN-RC-0001	CODA	North	320905.4100	7954402.7800	1013.6150	WGS84	23S	90	50	RC
CDN-RC-0002	CODA	North	320511.8270	7955196.2730	1011.5860	WGS84	23S	90	42	RC
CDN-RC-0003	CODA	North	320100.8390	7953991.2930	1055.6710	WGS84	23S	90	48	RC
CDN-RC-0004	CODA	North	321144.6840	7955026.3310	996.659	WGS84	23S	90	30	RC
CDN-RC-0005	CODA	North	320512.4660	7954410.2640	1046.2830	WGS84	23S	90	67	RC
CDN-RC-0006	CODA	North	318903.9350	7954005.7500	1054.6310	WGS84	23S	90	62	RC
CDN-RC-0007	CODA	North	318811.9840	7954302.0840	1036.3290	WGS84	23S	90	40	RC
CDN-RC-0008	CODA	North	319312.3660	7954414.0930	1049.2380	WGS84	23S	90	56	RC
CDN-RC-0009	CODA	North	320117.8920	7955206.2870	1026.0340	WGS84	23S	90	51	RC
CDN-RC-0010	CODA	North	319710.1470	7955202.2160	1015.9080	WGS84	23S	90	35	RC
CDN-RC-0011	CODA	North	318911.6630	7956005.9100	1054.3350	WGS85	23S	90	44	RC
CDN-RC-0012	CODA	North	318513.6870	7955195.0750	1043.3560	WGS86	23S	90	58	RC
CDN-RC-0013	CODA	North	318509.0160	7955597.1740	1054.2750	WGS87	23S	90	59	RC
CDN-RC-0014	CODA	North	318502.8400	7954814.4140	1014.5290	WGS88	23S	90	36	RC
CDN-RC-0015	CODA	North	319312.7430	7956403.5520	1062.3590	WGS89	23S	90	58	RC
CDN-RC-0016	CODA	North	319702.4270	7956007.8640	979.000	WGS90	23S	90	27	RC
CDN-RC-0017	CODA	North	319308.1570	7956006.6800	1023.8420	WGS91	23S	90	28	RC
CDN-RC-0018	CODA	North	320096.6030	7957206.9340	1059.1700	WGS92	23S	90	41	RC
CDN-RC-0019	CODA	North	320108.1060	7957600.4370	1047.5010	WGS93	23S	90	40	RC
CDN-RC-0020	CODA	North	320494.8310	7957991.9350	1047.1420	WGS94	23S	90	51	RC
CDN-RC-0021	CODA	North	320592.2110	7957644.6180	1069.6200	WGS95	23S	90	62	RC

Table 2: The coordinates of Diamond and RC drillholes completed in Coda North area

For personal use only

Appendix -2

HoleID	FROM	TO	Lithology	Stratigraphy
CDN-DD-0001	0	22.4	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-DD-0001	22.4	24.35	Kamafugite	Patos Formation
CDN-DD-0001	24.35	31	Ignibrite	Patos Formation
CDN-DD-0001	31	34.5	Ignibrite	Patos Formation
CDN-DD-0001	34.5	39.36	Sandstone	Areado Group
CDN-DD-0002	0	11.48	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-DD-0002	11.48	50.64	Kamafugite	Patos Formation
CDN-DD-0002	50.64	57.1	Ignibrite	Patos Formation
CDN-DD-0003	0	7	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-DD-0003	7	49	Kamafugite	Patos Formation
CDN-DD-0003	49	53.42	Conglomerate	Capacete Formation
CDN-DD-0004	0	6.65	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-DD-0004	6.65	11	Laterite	Tertiary Sedimentary Cover
CDN-DD-0004	11	71.5	Kamafugite	Patos Formation
CDN-DD-0004	71.5	79.9	Conglomerate	Capacete Formation
CDN-DD-0005	0	19.71	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-DD-0005	19.71	26.57	Laterite	Tertiary Sedimentary Cover
CDN-DD-0005	26.57	81.59	Kamafugite	Patos Formation
CDN-DD-0005	81.59	81.21	Sandstone	Areado Group
CDN-DD-0006	0	20	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-DD-0006	20	28.83	Laterite	Tertiary Sedimentary Cover
CDN-DD-0006	28.83	80	Kamafugite	Patos Formation
CDN-DD-0006	80	81.11	Sandstone	Areado Group
CDN-DD-0007	0	24	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-DD-0007	24	26	Laterite	Tertiary Sedimentary Cover
CDN-DD-0007	27	59.61	Kamafugite	Patos Formation
CDN-DD-0007	59.61	60	Sandstone	Areado Group
CDN-DD-0007	60	61.81	Kamafugite	Patos Formation
CDN-DD-0008	0	7.89	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-DD-0008	7.89	13.3	Laterite	Tertiary Sedimentary Cover
CDN-DD-0008	13.3	63.09	Kamafugite	Patos Formation
CDN-DD-0009	0	7	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-DD-0009	7	11	Laterite	Tertiary Sedimentary Cover
CDN-DD-0009	11	57	Kamafugite	Patos Formation
CDN-DD-0009	57	59.45	Kamafugite	Patos Formation
CDN-DD-0010	0	28.15	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-DD-0010	28.15	32.84	Laterite	Tertiary Sedimentary Cover
CDN-DD-0010	32.84	68.21	Kamafugite	Patos Formation
CDN-DD-0010	68.21	68.65	Sandstone	Areado Group
CDN-DD-0011	0	11.49	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-DD-0011	11.49	16.04	Laterite	Tertiary Sedimentary Cover
CDN-DD-0011	16.04	26	Kamafugite	Patos Formation
CDN-DD-0011	26	45.89		Areado or Bambui Group
CDN-DD-0012	0	21	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover

CDN-DD-0012	21	30.16	Laterite	Tertiary Sedimentary Cover
CDN-DD-0012	30.16	42.71	Kamafugite	Patos Formation
CDN-DD-0012	42.71	43.31	Sandstone	Areado Group
CDN-DD-0013	0	21.32	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-DD-0013	21.32	29.49	Laterite	Tertiary Sedimentary Cover
CDN-DD-0013	29.49	53.72	Kamafugite	Patos Formation
CDN-DD-0013	53.72	54.27	Sandstone	Areado Group
CDN-DD-0014	0	16.64	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-DD-0014	16.64	20.69	Laterite	Tertiary Sedimentary Cover
CDN-DD-0014	20.69	35.24	Kamafugite	Patos Formation
CDN-DD-0014	35.24	36.24	Sandstone	Areado Group
CDN-DD-0015	0	9.76	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-DD-0015	9.76	15.8	Laterite	Tertiary Sedimentary Cover
CDN-DD-0015	15.8	25.51	Kamafugite	Patos Formation
CDN-DD-0015	25.51	27.71	Sandstone	Areado Group
CDN-RC-0001	0	4	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0001	4	50	Kamafugite	Patos Formation
CDN-RC-0002	0	5	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0002	5	42	Kamafugite	Patos Formation
CDN-RC-0003	0	21	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0003	21	48	Kamafugite	Patos Formation
CDN-RC-0004	0	3	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0004	3	24	Kamafugite	Patos Formation
CDN-RC-0004	24	27	Ignibrite	Patos Formation
CDN-RC-0004	27	30	Sandstone	Areado Group
CDN-RC-0005	0	7	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0005	7	40	Kamafugite	Patos Formation
CDN-RC-0005	40	67	Ignibrite	Patos Formation
CDN-RC-0006	0	20	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0006	21	62	Kamafugite	Patos Formation
CDN-RC-0007	0	11	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0007	12	38	Kamafugite	Patos Formation
CDN-RC-0007	39	40	Sandstone	Areado Group
CDN-RC-0008	0	17	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0008	18	56	Kamafugite	Patos Formation
CDN-RC-0009	0	8	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0009	9	51	Kamafugite	Patos Formation
CDN-RC-0010	0	2	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0010	3	31	Kamafugite	Patos Formation
CDN-RC-0010	31	35	Sandstone	Areado Group
CDN-RC-0011	0	26	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0011	27	40	Kamafugite	Patos Formation
CDN-RC-0011	41	44	Sandstone	Areado Group
CDN-RC-0012	0	8	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0012	9	18	Laterite	Tertiary Sedimentary Cover
CDN-RC-0012	19	57	Kamafugite	Patos Formation

CDN-RC-0012	57	58	Sandstone	Areado Group
CDN-RC-0013	0	30	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0013	31	35	Laterite	Tertiary Sedimentary Cover
CDN-RC-0013	36	57	Kamafugite	Patos Formation
CDN-RC-0013	58	59	Sandstone	Areado Group
CDN-RC-0014	0	19	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0014	20	29	Laterite	Tertiary Sedimentary Cover
CDN-RC-0014	30	33	Kamafugite	Patos Formation
CDN-RC-0014	34	36	Sandstone	Areado Group
CDN-RC-0015	0	29	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0015	30	33	Laterite	Tertiary Sedimentary Cover
CDN-RC-0015	34	54	Kamafugite	Patos Formation
CDN-RC-0015	55	58	Sandstone	Areado Group
CDN-RC-0016	0	3	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0016	4	11	Laterite	Tertiary Sedimentary Cover
CDN-RC-0016	12	24	Kamafugite	Patos Formation
CDN-RC-0016	25	27	Sandstone	Areado Group
CDN-RC-0017	0	10	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0017	11	13	Laterite	Tertiary Sedimentary Cover
CDN-RC-0017	14	26	Kamafugite	Patos Formation
CDN-RC-0017	27	28	Sandstone	Areado Group
CDN-RC-0018	0	18	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0018	19	27	Laterite	Tertiary Sedimentary Cover
CDN-RC-0018	28	39	Kamafugite	Patos Formation
CDN-RC-0018	40	41	Sandstone	Areado Group
CDN-RC-0019	0	15	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0019	16	20	Laterite	Tertiary Sedimentary Cover
CDN-RC-0019	21	37	Kamafugite	Patos Formation
CDN-RC-0019	37	40	Sandstone	Areado Group
CDN-RC-0020	1	13	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0020	14	19	Laterite	Tertiary Sedimentary Cover
CDN-RC-0020	20	48	Kamafugite	Patos Formation
CDN-RC-0020	49	51	Sandstone	Areado Group
CDN-RC-0021	0	8	Tertiary Sedimentary Cover	Tertiary Sedimentary Cover
CDN-RC-0021	9	30	Laterite	Tertiary Sedimentary Cover
CDN-RC-0021	31	60	Kamafugite	Patos Formation
CDN-RC-0021	61	62	Sandstone	Areado Group

Table 3: Preliminary lithological logs of the drillholes of Coda North area

For personal use only