

## New Approval for Western Strategy

### Resource Expansion Drilling at Paradox Project

ASX: **ASN** Announcement

**Highlights:**

- Anson has received a new approval from the USA, Department of Interior Bureau of Land Management (BLM) for its Western Strategy drilling program at the Paradox Lithium Project in Utah, USA
- Re-entry drilling will target the Mineral Canyon Fed 1-3 and Sunburst 1 wells and is designed to deliver a substantial JORC Mineral Resource increase by converting a large Exploration Target into Indicated and Inferred Resources
- The new approval confirms the previous approval granted by the BLM in October 2022 and comes after a final review of the impact of the project

Anson Resources Limited (ASX: ASN) ("**Anson Resources**" or the Company) through its 100% owned subsidiary A1 Lithium is pleased to announce that it has received a new approval from the USA, Department of the Interior, Bureau of Land Management (BLM) for its Plan of Operation (POO) to commence its western expansion Mineral Resource drilling program at the Paradox Lithium Project (the Project) in south-eastern Utah, USA. The Record of Decision was issued 1<sup>st</sup> October 2024.

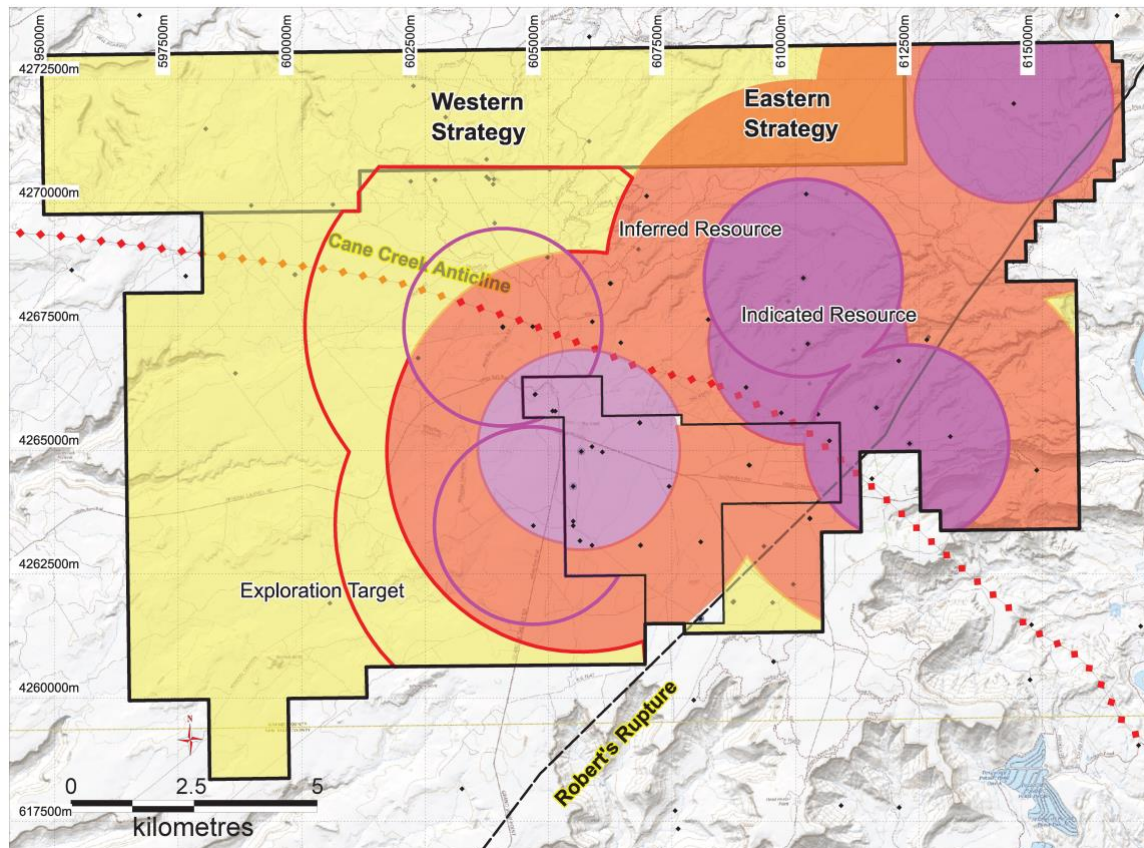


Figure 1: Plan showing proposed Areas of Influence (AOI) for the Western Strategy drilling program at Paradox Project.

For personal use only

Anson plans to re-enter the Mineral Canyon and Sunburst wells to expand the JORC Mineral Resource estimate as part of its western strategy drilling at the Paradox Project. The program includes the sampling of the thick Mississippian units and the Pennsylvanian clastic horizons. It is expected that the program will deliver a significant increase to the Project's existing JORC Mineral Resource; **1.04Mt of Lithium Carbonate Equivalent (LCE) and 5.27Mt of Bromine** (ASX announcement, 2 November 2022).

Category	Brine Volume (MI <sup>3</sup> )	Brine Tonnes (Mt)	Li (ppm)	Br (ppm)	Contained ('000t) <sup>1</sup>	
					LCE	Br <sub>2</sub>
Indicated	4,350	530	123	3,474	346	1,840
Inferred	8,108	1,038	125	3,308	692	3,434
<b>Resource</b>	<b>12,458</b>	<b>1,568</b>	<b>124</b>	<b>3,364</b>	<b>1,038</b>	<b>5,275</b>

Table 1: Paradox Lithium Project Total JORC Mineral Resource upgraded estimation

### Background to Approvals Process

Anson had previously been granted approval for its western strategy drilling at Paradox from the Utah Division of Oil, Gas and Mining (UDOGM) (ASX Announcement 25 January 2023), and advised that the requisite Reclamation Bond had been paid (ASX announcement 22 March 2023). Site works commenced at the Mineral Canyon Fed 1-3 well in the Q2 2023, (ASX Announcement May 4, 2023).



Figure 2: Picture of Commencement of Site Works at Mineral Canyon Site May 2023

The BLM state office subsequently conducted a further review of Anson's approved submission for its western strategy drilling program at Paradox. Anson, BLM and UDOGM personnel visited the Mineral Canyon and Sunburst well sites, and Anson was given positive approval for the re-establishment of the Mineral Canyon well pad, which was completed at the time of the visit.

The BLM review has now been completed, and final BLM confirmation of approval for Anson's POO for its proposed Western Strategy drilling program has now been granted.

### Background to Western Resource Expansion Program

Anson plans to re-enter two wells in the Western Strategy drilling: the Mineral Canyon well and Sunburst well.

The wells are located approximately 1km from historic lithium-rich assayed brines previously sampled from several wells in the "Big Flat" area. It is known from previous drilling of the Mississippian units that it is a very large reservoir which may result in a significant increase in the JORC Mineral Resource at the Paradox Project once the drilling program is completed.

The program is designed to sample the thick Mississippian units and the Pennsylvanian clastic horizons, to further increase the Project's existing JORC Mineral Resource of (ASX announcement, 2 November 2022).

### Western Strategy Exploration Target

Anson has previously reported a significant Exploration Target for its western strategy at the Paradox Project, of; **2.10Bt - 2.56Bt of brine grading 108 - 200ppm Li and 2,000 - 3,000ppm Br.** (ASX announcement 22 March 2023).

*The Exploration Target figure is conceptual in nature as there has been insufficient exploration undertaken on the project to define a mineral resource for the Leadville. It is uncertain that future exploration will result in a mineral resource.*

The Exploration Target draws on data generated from previous oil and gas drilling programs, and drill results from Anson's exploration programs. It also uses the parameters from the Company's current JORC Mineral Resource at the Paradox Project, such as the laboratory determined specific yield. It is noted that it does not include the additional Clastic Zones discovered in the recent Cane Creek 32-1 drilling.

The data and available assay results from these drilling programs have been used by a third party to estimate a brine Exploration Target. The Exploration Target ranges have been estimated using a combination of historic drilling data and calculations carried out from exploration programs and therefore the level of accuracy of the Exploration Target range is more accurate.

This announcement has been authorized for release by the Executive Chairman and CEO.

END

For further information please contact:

Bruce Richardson  
Executive Chairman and CEO  
E: [info@ansonresources.com](mailto:info@ansonresources.com)  
Ph: +61 7 3132 7990  
[www.ansonresources.com](http://www.ansonresources.com)  
Follow us on Twitter @anson\_ir

Will Maze  
Head of Investor Relations  
E: [investors@ansonresources.com](mailto:investors@ansonresources.com)  
Ph: +61 7 3132 7990

*Click here to subscribe to news from Anson Resources: <https://www.ansonresources.com/contact/>*

#### About Anson Resources Ltd

Anson Resources (ASX: ASN) is an ASX-listed mineral resources company with a portfolio of minerals projects in key demand-driven commodities. Its core asset is the Paradox Lithium Project in Utah, in the USA. Anson is focused on developing the Paradox Project into a significant lithium producing operation. The Company's goal is to create long-term shareholder value through the discovery, acquisition and development of natural resources that meet the demand of tomorrow's new energy and technology markets.

**Forward Looking Statements:** Statements regarding plans with respect to Anson's mineral projects are forward-looking statements. There can be no assurance that Anson's plans for development of its projects will proceed as expected and there can be no assurance that Anson will be able to confirm the presence of mineral deposits, that mineralisation may prove to be economic or that a project will be developed.

**Competent Person's Statement 1:** The information in this announcement that relates to exploration results, geology, Exploration Target and Mineral Resources is based on information compiled and/or reviewed by Mr Greg Knox, a member in good standing of the Australasian Institute of Mining and Metallurgy. Mr Knox is a geologist who has sufficient experience which is relevant to the style of mineralisation under consideration and to the activity being undertaken to qualify as a "Competent Person", as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves and consents to the inclusion in this report of the matters based on information in the form and context in which they appear. Mr Knox is a director of Anson.

For personal use only

## JORC Code 2012 “Table 1” Report

### Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

For personal use only

Criteria	JORC Code Explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> <li>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialized industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralization that are Material to the Public Report.</li> <li>In cases where ‘industry standard’ work has been done this would be relatively simple (e.g. ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverized to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralization types (e.g. submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul style="list-style-type: none"> <li>Historical oil wells (Gold Bar Unit #2, Cane Creek #32-1-25-20, Skyline Unit 1, and Long Canyon Unit 2) were utilized to access brine bearing horizons for sampling at the Paradox Project. Geophysical logging was completed to determine geologic relationships and guide casing perforation. Once perforated, a downhole packer system was utilized to isolate individual clastic zones and Mississippian Units (production intervals) for sampling. Perforation and packer isolated sampling moved from bottom to top to allow for the use of a single element packer.</li> <li>Brine fluid samples will be discharged from each sample interval to large 1,000 L plastic totes. Samples were drawn from these totes to provide representative samples of the complete volume sampled at each production interval.</li> <li>The brine samples will be collected in clean plastic bottles. Each bottle was marked with the location and sample interval.</li> </ul>
Drilling Techniques	<ul style="list-style-type: none"> <li>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, facesampling bit or other type, whether core is oriented and if so, by what method, etc.).</li> </ul>	<ul style="list-style-type: none"> <li>Standard mud rotary drilling will be utilized to re-enter historical oil wells. The wells had been previously plugged and abandoned in some cases, requiring drill out of cement abandonment plugs. All drilling fluids were flushed from the well casing prior to perforation and sampling activities.</li> <li>Historical drilling techniques into the Mississippian are not known but the wells were deep exploratory wells accessing oil and gas.</li> </ul>
Drill Sample Recovery	<ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul style="list-style-type: none"> <li>No new drill holes were completed. Therefore, no drill chips, cuttings, or core was available for review.</li> <li>Drilling procedures for well re-entry will only produce cuttings from cement plugs.</li> </ul>

For personal use only

<p>Logging</p>	<ul style="list-style-type: none"> <li>• Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>• Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography.</li> <li>• The total length and percentage of the relevant intersections logged.</li> </ul>	<ul style="list-style-type: none"> <li>• No new drill holes will be completed.</li> <li>• Cuttings and core samples can be retrieved from UGS and USGS core libraries</li> <li>• Not all wells were cored, but cuttings were collected.</li> <li>• Cuttings were recovered from mud returns.</li> <li>• Sampling of the targeted horizons will be carried out at the depths interpreted from the historical records and newly completed geophysical logs.</li> <li>• The Mississippian Units and Clastic Zones 17, 19, 29, 31 and 33 will be sampled.</li> </ul>
<p>Sub-sampling Techniques and Preparation</p>	<ul style="list-style-type: none"> <li>• If core, whether cut or sawn and whether quarter, half or all core taken. • If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry.</li> <li>• For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>• Quality control procedures adopted for all sub-sampling stages to maximize representivity of samples.</li> <li>• Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>• Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>	<ul style="list-style-type: none"> <li>• Bulk brine samples will be collected for potential further analysis.</li> <li>• Core samples were collected in the Long Canyon No 1, Big Flat Unit 1, Big Flat Unit 2 and Big Flat Unit 3 wells from the Mississippian Units.</li> <li>• Cuttings have been saved for most of the wells drilled in the area.</li> </ul>
	<ul style="list-style-type: none"> <li>• For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>• Quality control procedures adopted for all sub-sampling stages to maximize representivity of samples.</li> <li>• Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>	<p>Historic Wells</p> <ul style="list-style-type: none"> <li>• Sample size and quality were considered appropriate by operators/labs.</li> </ul> <p>Re-Entries</p> <ul style="list-style-type: none"> <li>• Sampling will follow the protocols produced by SRK for lithium brine sampling.</li> <li>• Samples will be collected in IBC containers and samples taken from them.</li> <li>• Duplicate samples kept Storage samples will also be collected and securely stored.</li> <li>• Bulk samples will also be collected for future use.</li> <li>• Sample sizes will be appropriate for the program being completed.</li> </ul>
<p>Quality of Assay Data and Laboratory Tests</p>	<ul style="list-style-type: none"> <li>• The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>• For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>• Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</li> </ul>	<ul style="list-style-type: none"> <li>• Analysis of brine fluids were completed at several laboratories including SGS (Applied Technology and Innovative Centre), Empact Laboratories and Enviro-Chem Analytical, Inc. All labs followed a standard QA/QC program that included duplicates, standards, and blind control samples. Future sampling will also be carried out at these laboratories.</li> <li>• The quality control and analytical procedures used by the three analytical laboratories are considered to be of high quality.</li> <li>• The assaying technique for the Big Flat No 2 well in the Mississippian is not known. The sample was assayed by the Ethyl Corporation.</li> <li>• Duplicate and standard analyses are considered to be of acceptable quality. Limited downhole geophysical tools were utilized for orientation within the cased oil wells prior to perforation. These are believed to be calibrated periodically to provide consistent results.</li> </ul>

<p><i>Verification of Sampling and Assaying</i></p>	<ul style="list-style-type: none"> <li>• <i>The verification of significant intersections by either independent or alternative company personnel.</i></li> <li>• <i>The use of twinned holes.</i></li> <li>• <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></li> <li>• <i>Discuss any adjustment to assay data.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Accuracy, the closeness of measurements to the “true” or accepted value, was monitored by the insertion of laboratory certified standards.</li> <li>• Duplicate samples in the analysis chain were submitted as part of the laboratory batch and results are considered acceptable.</li> <li>• Laboratory data reports were verified by the C P .</li> <li>• Historical assays are recorded in Concentrated Subsurface Brines, UGS Special Publication 13, printed in 1965.</li> </ul>
<p><i>Location of Data Points</i></p>	<ul style="list-style-type: none"> <li>• <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></li> <li>• <i>Specification of the grid system used.</i></li> <li>• <i>Quality and adequacy of topographic control.</i></li> </ul>	<ul style="list-style-type: none"> <li>• The location of historical oil wells within the Paradox Basin is well documented.</li> <li>• Coordinates of historical oil wells utilized for accessing clastic zones for sampling is provided in Table 9-1 of the report.</li> <li>• Re-entries re-surveyed by licensed surveyor.</li> </ul>
<p><i>Data Spacing and Distribution</i></p>	<ul style="list-style-type: none"> <li>• <i>Data spacing for reporting of Exploration Results.</i></li> <li>• <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></li> <li>• <i>Whether sample compositing has been applied.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Data spacing is considered acceptable for a brine sample but has not been used in any Resource calculations.</li> <li>• There has been no compositing of brine samples.</li> </ul>
<p><i>Orientation of Data in Relation to Geological Structure</i></p>	<ul style="list-style-type: none"> <li>• <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></li> <li>• <i>If the relationship between the drilling orientation and the orientation of key mineralized structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i></li> <li>•</li> </ul>	<ul style="list-style-type: none"> <li>• The Paradox Basin hosts bromine and lithium bearing brines within a sub-horizontal sequence of salts, anhydrite, shale and dolomite. The historical oil wells are vertical (dip -90), perpendicular to the target brine hosting sedimentary rocks.</li> <li>• Sampling records do not indicate any form of sampling bias for brine samples.</li> </ul>
<p><i>Sample Security</i></p>	<ul style="list-style-type: none"> <li>• <i>The measures taken to ensure sample security.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Brine samples previously collected were moved from the drill pad as necessary and secured.</li> <li>• All samples were marked with unique identifiers upon collection.</li> </ul>
<p><i>Audits or Reviews</i></p>	<ul style="list-style-type: none"> <li>• <i>The results of any audits or reviews of sampling techniques and data</i></li> </ul>	<ul style="list-style-type: none"> <li>• No audits or reviews have been conducted at this point in time.</li> </ul>

## Section 2 Reporting of Exploration Results

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
<i>Mineral Tenement and Land Tenure Status</i>	<ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.</li> </ul>	<ul style="list-style-type: none"> <li>The Paradox Basin Brine Project is located in southeastern Utah, USA, and encompasses a land position of 21,450 hectares.</li> <li>The land position is constructed from 2,434 Federal placer mineral claims, and three mineral leases from the State of Utah.</li> <li>A1 Lithium has 50% ownership of 87 of the 2,434 mineral claims through an earn-in joint venture with Voyageur Mineral Ltd. All other claims and leases are held 100% by Anson's U.S. based subsidiary, A1 Lithium Inc.</li> <li>The claims/leases are in good standing, with payment current to the relevant governmental agencies.</li> </ul>
<i>Exploration Done by Other Parties</i>	<ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>	<ul style="list-style-type: none"> <li>Historical exploration for brines within the Paradox Basin includes only limited work in the 1960s. No brine resource estimates had been completed in the area, nor has there been any historical economic production of bromine or lithium from these fluids.</li> <li>The historical data generated through oil and gas development in the Paradox Formation has supplied some information on brine chemistry.</li> </ul>
<i>Geology</i>	<ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralization.</li> </ul>	<ul style="list-style-type: none"> <li>The geology of the Paradox Formation indicates a restricted marine basin, marked by 29 evaporite sequences. Brines that host bromine and lithium mineralization occur within the saline facies of the Paradox Formation and are generally hosted in the more permeable dolomite sediments.</li> <li>Controls on the spatial distribution of certain salts (boron, bromine, lithium, magnesium, etc.) within the clastic aquifers of the Paradox Basin is poorly understood but believed to be in part dictated by the geochemistry of the surrounding depositional cycles, with each likely associated with a unique geochemical signature.</li> <li>The source and age of the brine requires further investigation.</li> </ul>
<i>Drill Hole Information</i>	<ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in meters) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length.</li> </ul> </li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul>	<ul style="list-style-type: none"> <li>Four existing oil wells were re-entered and worked at the Paradox Project to collect brine samples. Although these wells may be directional, all wells are vertical (dip -90, azimuth 0 degrees) through the stratigraphy of interest.</li> <li>Detailed historical files on these oil wells were reviewed to plan the re-entry, workover and sampling activities.</li> <li>Following geophysical logging to confirm orientation within the cased well, potential production intervals were perforated, isolated and sampled.</li> <li>The target horizons in the Paradox Formation are approximately 1,800 meters below ground surface.</li> <li>Data on hundreds of historic wells is contained with a database published by the Utah Geological Survey. Open File Report 600 'WELL DATABASE AND MAPS OF SALT CYCLES AND POTASH ZONES OF THE PARADOX BASIN, UTAH', published in 2012.</li> </ul>

For personal use only



Criteria	JORC Code Explanation	Commentary
Data Aggregation Methods	<ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade</li> <li>Brine samples taken in holes were averaged (arithmetic average) without 14 Criteria JORC Code explanatory truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>	<ul style="list-style-type: none"> <li>No weighting or cut-off grades have been applied.</li> </ul>
Relationship Between Mineralization Widths and Intercept Lengths	<ul style="list-style-type: none"> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralization with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</li> </ul>	<ul style="list-style-type: none"> <li>The sediments hosting the brine aquifer are interpreted to be essentially perpendicular to the vertical oil wells. Therefore, all reported thicknesses are believed to be accurate.</li> <li>Brines are collected and sampled over the entire perforated width of the zone.</li> <li>The Mississippian Units are assumed to be porous and permeable over its entire vertical width based on drilling records.</li> </ul>
Diagrams	<ul style="list-style-type: none"> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> </ul>	<ul style="list-style-type: none"> <li>A diagram is presented in the text showing the location of the properties and re-entered oil wells.</li> </ul>
Balanced Reporting	<ul style="list-style-type: none"> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</li> </ul>	<ul style="list-style-type: none"> <li>All data generated by Blackstone Minerals through re-entry, workover, and sampling of historical oil wells has been previously presented. No newly generated data has been withheld or summarized.</li> </ul>
Other Substantive Exploration Data	<ul style="list-style-type: none"> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</li> </ul>	<ul style="list-style-type: none"> <li>All available current exploration data has been presented.</li> </ul>
Further Work	<ul style="list-style-type: none"> <li>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>	<ul style="list-style-type: none"> <li>The well re-entries and sampling planned will cover the Paradox Formation and Leadville Limestone.</li> <li>Future well re-entries will focus on wells surrounding the proposed re-entry locations to upgrade future JORC resources.</li> </ul>