

Assays return high grade shallow silver intercepts of 1,615 g/t over 13m in 25WCDD011 including 2m at 10,049 g/t

High grade gold interval of 11.1 g/t over 1m also intercepted in 25WCDD011

Highlights

- Assays from drill hole 25WCDD011 have identified several significant highgrade silver zones including:
 - 17 metres at 858g/t Ag from 5 metres including:
 - 2 metres at 6,349g/t Ag from 7 metres;
 - 10 metres at 850g/t Ag from 47 metres including:
 - 3 metres at 2,593g/t Ag from 50 metres; and
 - 13 metres at 1,615g/t Ag from 62 metres including:
 - 2 metres at 10,049g/t Ag from 63 metres.
- Native silver has been identified in 25WCDD011.
- 25WCDD011 has also intersected high grade gold including:
 - 1 metre at 11.1g/t Au from 51 metres.
- Assays from drill hole 25WCDD012 have also returned significant high-grade silver intercepts including:
 - 6 metres at 317g/t Ag from 10 metres including:
 - 1m at 1,455g/t Ag from 13 metres; and
 - 14 metres at 162g/t Ag from 18 metres.
- Drilling at Elizabeth Hill continues to identify mineralisation and these results will be used to outline a near surface resource.

ACN: 155 472 834

West Coast Silver Limited (ASX: WCE) ('West Coast Silver' or the 'Company') is pleased to advise it has received further outstanding silver intercepts from the inaugural diamond drill program (12 holes for 1,183m) at the high-grade Elizabeth Hill Silver Project in the Pilbara. Of the assay results for four drill holes (25WCDD003, 25WCDD004, 25WCDD011 and 25WCDD012), exceptionally shallow, high grade silver results were returned for 25WCDD011 and 25WCDD012 (Figure 3 and Figure 4).

Both holes intersected significant silver mineralisation from near surface (Table 1), with particularly impressive results from hole **25WCDD011** which intersected:

- 17 metres at 858g/t Ag from 5 metres including:
 - 2 metres at 6,349g/t Ag from 7 metres;
- 10 metres at 850g/t Ag from 47 metres including:
 - o 3 metres at 2,593g/t Ag from 50 metres; and
- 13 metres at 1,615g/t Ag from 62 metres including
 - 2 metres at 10,049g/t Ag from 63 metres.

Drill hole **25WCDD011**, which was strategically drilled to test depth and mineralisation continuity, has also intersected significant high grade gold mineralisation (Table 2) including **1 metre at 11.1g/t Au**.

Along with significant silver and gold mineralisation, **native silver** has also been identified in **25WCDD011** (Figure 1 & Figure 2). This development has initiated investigations within the company into the viability of simplistic gravity separation process to recover free silver from Elizabeth Hill style mineralisation. Elizabeth Hill is located adjacent to a number of existing processing facilities including Radio Hill which is located ~25km to the north. Utilisation of these facilities will be factored into the companies assessment into the potential processing of Elizabeth Hill material.

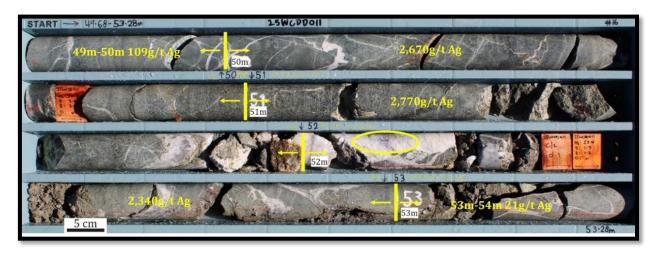


Figure.7._8**0**WCDD677;0**9@2.0**9;8**0**m.-.visible.native.silver.and.silver.sulphide.minerals.(yellow.circle).in.coarse. crystalline.calcite_quartz..vein;.The.vein.is.hosted.in.fine_to.medium.grained.pyroxenite;.The.silver.minerals.are.between. 7mm.and.8mm.in.size.and.comprise.about.7 > .of.the.86cm.calcite_quartz.vein?commencing.at.**0**8m;

Cautionary Statement: In relation to disclosure of visual estimates of native silver and silver sulphide minerals, the Company cautions that visual methods of mineral identification and estimation of minerals abundance should not be considered as a proxy of substitute for laboratory analysis. The Ag concentrations as determined with the laboratory analysis are shown for the respective intervals on the core tray. Visual information also potentially provides no information regarding impurities or deleterious physical properties relevant to valuations.

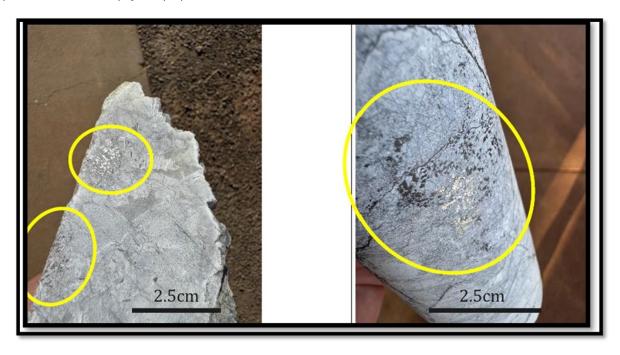


Figure.8._,8**0**WCDD677;**.0**8;67**_0**8;8m.(SAMPLE.8**0**WC60_67**0**),-.Silver_grey.native.silver.and.silver.sulphide.minerals.7mm.to. 8mm.in.size.comprise.about.7> vof.the.fine_grained.quartz.and.coarse.grained.calcite.vein;.Quartz.comprises.about.86> vof.the.vein;

Commenting on the results, Executive Chairman Bruce Garlick said:

"We are extremely pleased with the delivery of more outstanding results from our maiden drill program at Elizabeth Hill. We have intersected more high-grade silver from surface and with grades up to 10,049g/t we are now very confident in the near-surface potential at Elizabeth Hill.

What is even more encouraging is the intersection of high-grade gold up to 11.1g/t in hole 25CWDD011. We look forward to additional assay results that should be received in the coming weeks."

In addition to **25WCDD011**, drill hole **25WCDD012** has also intersected high grade silver from near surface including:

- 6 metres at 317g/t Ag from 10 metres including.
 - 1m at 1,455g/t Ag from 13 metres.

Hole ID	Interval (m)	Ag (g/t)	From (m)
25WCDD011	17.00	858	5.00
Including	2.00	6,349	7.00
25WCDD011	7.00	545	25.00
25WCDD011	1.00	29	42.00
Including	0.77	3,741	26.00
25WCDD011	10.00	850	47.00
including	3.00	2,593	50.00
25WCDD011	1.00	33	59.00
25WCDD011	13.00	1,615	62.00
Including	2.00	10,049	63.00
25WCDD011	8.00	101	80.00
25WCDD011	4.00	49	99.00
25WCDD012	1.00	28	4.00
25WCDD012	6.00	317	10.00
Including	1.00	1,455	13.00
25WCDD012	14.00	162	18.00
Including	2.00	882	26.00

Table.7.-.Significant.Silver.Intercept.Table.(8@g-t.Ag.cut_off)

Hole ID	Interval (m)	Au (g/t)	From (m)
25WCDD011	2.50	0.86	26.5
25WCDD011	1.00	11.10	51
25WCDD011	3.00	1.51	62

Table.8.-.Significant.Gold.Intercept.Table.(6;7g-t.Au.cut_off)

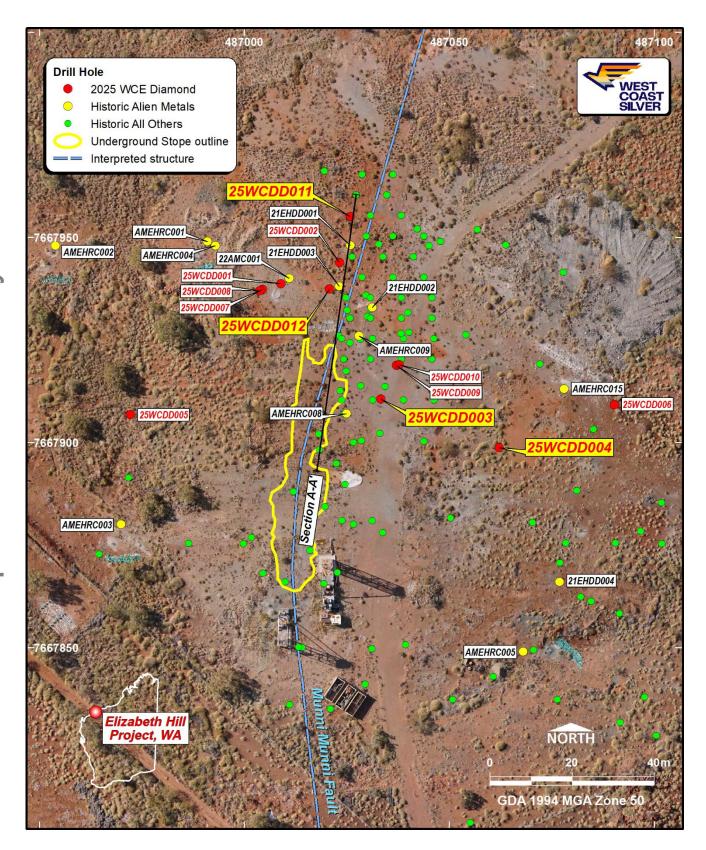


Figure.9--.Plan.view.of.868@West.Coast.Silver.Diamond.core.drilling.and.historical.drilling

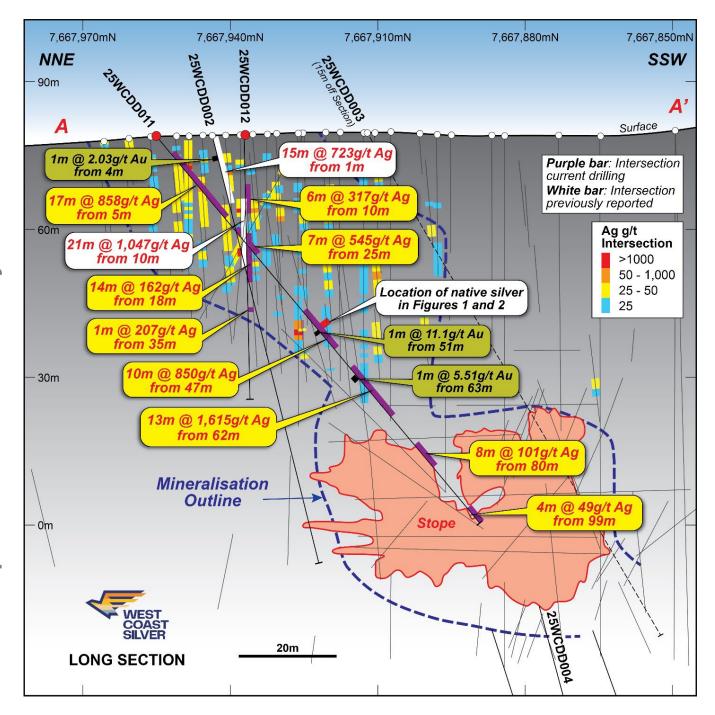


Figure.0.-.Long.section.showing.drill.holes.8**0**WCDD660?8**0**WCDD677.™.8**0**WCDD678.and.previously.reported. 8**0**WCDD667.™.8**0**WCDD668(looking.ESE.(refer.to.ASX.announcement.dated.7**0**° July.868**0**;

Laboratory Testing

Results have now been received for six diamond drill holes (25CWDD001, 002, 003, 004, 011 & 012) with no significant drill intercepts received for holes 25CWDD003 and 25WCDD004 (Figure 4). The collar locations and assay results for the four holes reported in this release are provided in Appendices A and B, respectively. The remaining results for the six outstanding drill holes are expected to be returned within 4–6 weeks. Result timeframes may vary pending laboratory analysis requirements for further testing.

Upcoming Works at Elizabeth Hill

Value Pathway and Advancement Strategy

Proven High Grade Silver Mineralisation with Key Upcoming Catalysts.









Remaining Assays

- Additional assays as part of Inaugural drilling campaign
- Combination of shallow holes and testing for deeper mineralisation

Near Mine Exploration & Development

- Trenching
- Shallow Auger Drilling
- Geochemistry
- Open Pit
 Quantification

Follow on Drill Program

- Additional drilling at Elizabeth Hill
- Near mine drilling targeting additional Elizabeth Hill Style deposits

Regional Exploration

Mapping of high priority targets

August – December 2025



Figure. Q_. Key.upcoming.works.and.catalysts

The Elizabeth Hill Project

Elizabeth Hill is one of Australia's high-grade silver projects and has a proven production history outlined below:

- **High grades enabled low processing tonnes:** 1.2Moz of silver was produced from just 16,830t of ore at a head grade of 2,194g/t (70.5 oz/t Ag)¹
- Previous mining operation ceased in 2000: because of low silver prices (US\$5)²
- Simplistic historical processing technique: native silver was recovered via low-cost gravity separation techniques
- **Untapped potential remains** in ground with deposit open at depth and recent consolidation of land package offers potential to discover more Elizabeth Hill style deposits.
- Tier 1 Mining Jurisdiction located on a mining lease with potential processing option at the nearby Radio Hill site.

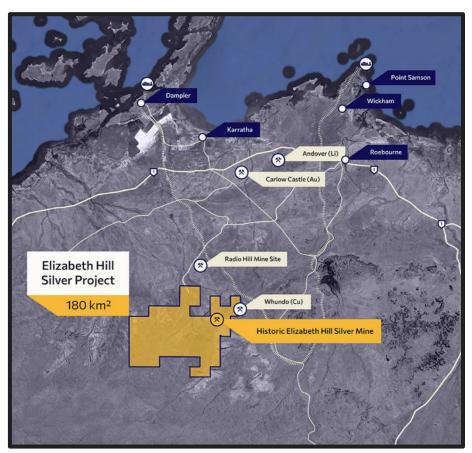


Figure.@_.Tenement.Location

Through the consolidation of the surrounding land packages into a single contiguous 180km² package significant exploration and growth potential exists both near mine and regionally.

The land package holds a significant portion of the Munni Munni fault system which is considered prospective for Elizabeth Hill look-a-like silver deposits.

¹ WAMEX Annual Report, 1 April 2014 to 31 March 2015, Elizabeth Hill Silver Project, Global Strategic Metals NL, p16 2 www.kitco.com/charts/silver

This ASX announcement has been authorised for release by the Board of Directors of West Coast Silver Limited. For further information, please contact:

Bruce Garlick
Executive Director
West Coast Silver Limited

E: info@westcoastsilver.com.au

Competent Person Statement

The information in this report that relates to Exploration Results is based on information reviewed by Mr Reddicliffe a Competent Person who is a Fellow of the Australasian Institute of Mining and Metallurgy and is a Director and shareholder of West Coast Silver. Mr Reddicliffe, BSc (Hons), MSc, has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration to qualify as a Competent Person as defined in the 2012 edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Thomas Reddicliffe consents to the inclusion in the report of the information in the form and context in which it appears.

Forward-Looking Statements

Statements in this announcement which are not statements of historical facts, including but not limited to those relating to the proposed transaction, are forward-looking statements. These statements instead represent management's current expectations, estimates and projections regarding future events. Although management believes the expectations reflected in such forward-looking statements are reasonable, forward-looking statements are based on the opinions, assumptions and estimates of management at the date the statements are made and are subject to a variety of risks and uncertainties and other factors that could cause actual events or results to differ materially from those projected in the forward-looking statements.

Accordingly, investors are cautioned not to place undue reliance on such statements.

Cautionary Statement

This document is confidential and may not be reproduced, redistributed or passed on, directly or indirectly. This document is neither a prospectus nor an offer to subscribe for fully paid ordinary shares. West Coast Silver and its directors, employees and consultants make no representations or warranty as to the accuracy, reliability or completeness of this document, and have no liability, including liability to any person by reason of negligence of, or contained in or derived from, or for any omissions from this document, except liability under statute that cannot be excluded. This document contains reference to certain targets and plans of West Coast Silver which may or may not be achieved. The performance of West Coast Silver may be influenced by a number of factors, uncertainties and contingencies, many of which are outside the control of the Company and its directors, staff and consultants.

Appendix A - Drill Collar Locations for West Coast Silver

Hole ID	Easting_m	Northing_m	RL	Azi	Dip	EOH (m)
25WCDD001	487008	7667938	79	91	62	47.2
25WCDD002	487023	7667943	79	165	75	90.5
25WCDD003	487033	7667910	80	180	60	120.4
25WCDD004	487062	7667898	82	240	65	141.9
25WCDD005	486972	7667906	79	140	65	171.3
25WCDD006	487090	7667909	84	250	57	192.41
25WCDD007	487004	7667937	79	110	55	57.3
25WCDD008	487003	7667936	79	130	62	63.3
25WCDD009	487037	7667918	80	265	65	60.1
25WCDD010	487037	7667918	80	250	72	66.4
25WCDD011	487025	7667955	79	180	50	103
25WCDD012	487020	7667937	79	164	90	54

Coordinate system GDA94z50

Appendix B – Assay Results for West Coast Silver

Hole_ID	From	То	Ag g/t	Au g/t	Cu %	Pb ppm	Zn ppm
25WCDD003	0.00	1.00	0.39	0.005	0.061	2.2	48
25WCDD003	1.00	2.00	0.19	0.005	0.110	1.8	93
25WCDD003	2.00	3.00	0.24	0.005	0.077	1.1	85
25WCDD003	3.00	4.00	0.41	0.005	0.065	0.9	70
25WCDD003	4.00	5.00	1.48	0.010	0.129	1.4	74
25WCDD003	5.00	6.00	2.12	0.005	0.121	1.3	70
25WCDD003	6.00	7.00	2.37	0.005	0.074	1.3	64
25WCDD003	7.00	8.00	1.69	0.010	0.045	0.8	63
25WCDD003	8.00	9.00	1.67	0.005	0.052	1	62
25WCDD003	9.00	10.00	0.67	0.005	0.028	0.8	65
25WCDD003	10.00	11.00	0.86	0.005	0.033	0.8	60
25WCDD003	11.00	12.00	1.29	0.005	0.045	0.8	59
25WCDD003	12.00	13.00	1.92	0.005	0.075	0.7	63
25WCDD003	13.00	14.00	0.98	0.005	0.039	1	65
25WCDD003	14.00	15.00	0.26	0.005	0.001	8.6	103
25WCDD003	15.00	16.00	0.16	0.020	0.001	5.2	135
25WCDD003	16.00	17.00	0.15	0.005	0.006	3.1	94
25WCDD003	17.00	18.00	0.24	0.005	0.011	1.9	83
25WCDD003	18.00	19.00	1.23	0.010	0.060	0.8	52
25WCDD003	19.00	20.00	0.58	0.005	0.029	0.8	56
25WCDD003	20.00	21.00	1.06	0.010	0.054	0.7	62

Hole_ID	From	То	Ag g/t	Au g/t	Cu %	Pb ppm	Zn ppm
25WCDD003	21.00	22.00	2.18	0.070	0.125	1	72
25WCDD003	22.00	23.00	1.91	0.020	0.122	1	68
25WCDD003	23.00	24.00	1.10	0.005	0.064	0.7	64
25WCDD003	24.00	25.00	1.26	0.005	0.076	0.8	63
25WCDD003	25.00	26.00	7.83	0.010	0.407	1.2	69
25WCDD003	26.00	27.00	5.32	0.020	0.302	1.4	73
25WCDD003	27.00	28.00	1.94	0.030	0.091	0.9	61
25WCDD003	28.00	29.00	0.80	0.010	0.026	0.6	56
25WCDD003	29.00	30.00	0.65	0.005	0.023	0.8	56
25WCDD003	30.00	31.00	0.30	0.005	0.007	0.6	52
25WCDD003	31.00	32.00	0.36	0.005	0.010	0.6	51
25WCDD003	32.00	33.00	0.64	0.005	0.027	0.7	55
25WCDD003	33.00	34.00	0.33	0.010	0.011	1.4	59
25WCDD003	34.00	35.00	0.41	0.005	0.018	0.6	59
25WCDD003	35.00	36.00	2.12	0.010	0.131	0.7	62
25WCDD003	36.00	37.00	0.49	0.010	0.033	0.6	59
25WCDD003	37.00	38.00	0.85	0.010	0.054	0.7	59
25WCDD003	38.00	39.00	0.75	0.005	0.054	1.1	67
25WCDD003	39.00	40.00	0.63	0.010	0.047	2.5	69
25WCDD003	40.00	41.00	0.81	0.005	0.092	7.9	81
25WCDD003	41.00	42.00	0.42	0.005	0.039	3.9	77
25WCDD003	63.00	64.00	1.06	0.020	0.149	1.2	65
25WCDD003	64.00	65.00	0.72	0.010	0.087	1.3	65
25WCDD003	67.00	68.00	1.56	0.020	0.201	15.6	84
25WCDD003	68.00	69.00	1.03	0.010	0.156	12.7	84
25WCDD003	74.00	75.00	1.14	0.010	0.152	12.8	75
25WCDD003	75.00	76.00	0.37	0.005	0.056	4.1	76
25WCDD003	91.00	92.00	0.51	0.005	0.067	5.6	78
25WCDD003	92.00	93.00	0.42	0.005	0.045	4.6	70
25WCDD004	19.00	20.00	1.75	0.050	0.148	37.6	53
25WCDD004	24.00	25.00	0.38	0.010	0.038	1.4	59
25WCDD004	25.00	26.00	1.56	0.040	0.352	11.3	86
25WCDD004	26.00	27.00	1.17	0.010	0.205	1.9	78
25WCDD004	44.00	45.00	2.24	0.010	0.397	6	59
25WCDD004	45.00	46.00	0.85	0.005	0.144	3.1	51
25WCDD004	52.00	53.00	0.39	0.005	0.078	5.3	68
25WCDD004	57.00	58.00	0.72	0.005	0.170	5	66
25WCDD004	58.00	59.00	2.03	0.010	0.443	28.4	66
25WCDD004	74.00	75.00	3.31	0.010	0.811	16.3	91
25WCDD004	75.00	76.00	1.74	0.010	0.330	19.9	51
25WCDD004	76.00	77.00	2.95	0.010	0.482	9.6	59
25WCDD004	77.00	78.00	4.39	0.005	0.627	45.3	77

Hole_ID	From	То	Ag g/t	Au g/t	Cu %	Pb ppm	Zn ppm
25WCDD004	78.00	79.00	3.45	0.005	0.551	25.5	85
25WCDD004	79.00	80.00	2.20	0.005	0.277	27.1	81
25WCDD004	80.00	81.00	15.70	0.010	1.760	15.4	142
25WCDD004	81.00	82.00	3.64	0.005	0.352	8	88
25WCDD004	82.00	83.00	1.78	0.005	0.071	10.4	89
25WCDD004	87.00	88.00	1.80	0.005	0.044	3.2	80
25WCDD004	88.00	89.00	5.30	0.005	0.121	3.6	84
25WCDD004	90.00	91.00	17.25	0.005	0.496	5.4	101
25WCDD004	91.00	92.00	1.19	0.005	0.024	2	82
25WCDD004	92.00	93.00	1.06	0.005	0.017	1.5	79
25WCDD004	93.00	94.00	1.95	0.005	0.024	2.3	78
25WCDD004	94.00	95.00	1.56	0.005	0.019	2.6	82
25WCDD004	95.00	96.00	3.21	0.005	0.041	2.8	86
25WCDD004	96.00	97.00	3.00	0.005	0.029	5.1	83
25WCDD004	97.00	98.00	2.91	0.005	0.027	2.8	83
25WCDD004	98.00	99.00	2.28	0.005	0.019	3	84
25WCDD004	99.00	100.00	8.09	0.005	0.064	9.6	91
25WCDD004	100.00	101.00	5.58	0.005	0.048	10.4	81
25WCDD004	101.00	102.00	6.17	0.005	0.053	6400	84
25WCDD004	102.00	103.00	6.98	0.005	0.055	13.6	72
25WCDD004	103.00	104.00	7.89	0.005	0.067	6.4	73
25WCDD004	104.00	105.00	8.28	0.005	0.075	14.3	92
25WCDD004	105.00	106.00	6.84	0.005	0.060	19.3	90
25WCDD004	106.00	107.00	2.88	0.005	0.023	60.4	109
25WCDD004	107.00	108.00	4.36	0.005	0.037	6.3	84
25WCDD004	108.00	109.00	10.55	0.010	0.081	7.9	84
25WCDD004	109.00	110.00	8.80	0.005	0.070	19.8	93
25WCDD004	110.00	111.00	6.70	0.005	0.047	33.2	224
25WCDD004	111.00	112.00	2.03	0.005	0.019	16	148
25WCDD004	112.00	113.00	6.88	0.005	0.067	98.4	153
25WCDD004	113.00	114.00	4.95	0.005	0.041	37.5	88
25WCDD004	114.00	115.00	1.92	0.005	0.016	220	107
25WCDD004	115.00	116.00	5.73	0.005	0.046	37.2	179
25WCDD004	116.00	117.00	7.07	0.005	0.061	21.3	151
25WCDD004	117.00	118.00	4.45	0.010	0.041	42.7	319
25WCDD004	118.00	119.00	2.65	0.005	0.020	54.3	174
25WCDD004	119.00	120.00	2.82	0.005	0.036	49.2	228
25WCDD004	120.00	121.00	5.46	0.005	0.050	139	1050
25WCDD004	121.00	122.00	5.73	0.005	0.054	119.5	634
25WCDD004	122.00	123.00	2.84	0.005	0.034	371	367
25WCDD004	123.00	124.00	4.54	0.005	0.047	108	245
25WCDD004	124.00	125.00	2.45	0.005	0.026	105.5	230

Hole_ID	From	То	Ag g/t	Au g/t	Cu %	Pb ppm	Zn ppm
25WCDD004	125.00	126.00	4.89	0.005	0.040	246	635
25WCDD004	126.00	127.00	7.21	0.010	0.035	5830	1480
25WCDD004	127.00	128.00	2.96	0.005	0.034	208	437
25WCDD004	128.00	129.00	3.11	0.005	0.015	737	393
25WCDD004	129.00	130.00	3.91	0.010	0.006	520	142
25WCDD004	130.00	133.00	5.14	0.005	0.003	283	92
25WCDD004	133.00	134.00	11.55	0.010	0.002	70.9	57
25WCDD004	134.00	135.00	7.04	0.005	0.001	20	31
25WCDD004	135.00	136.00	2.70	0.010	0.001	21.9	26
25WCDD004	136.00	137.00	2.79	0.010	0.001	24.6	32
25WCDD004	137.00	138.00	0.41	0.010	0.001	38.6	19
25WCDD004	138.00	139.00	0.11	0.005	0.001	39.7	24
25WCDD004	139.00	140.00	0.12	0.010	0.000	41.8	23
25WCDD004	140.00	141.00	0.18	0.010	0.001	42.4	22
25WCDD004	141.00	141.90	0.08	0.010	0.000	56.1	15
25WCDD011	0.00	1.00	15.40	0.005	0.060	77.4	200
25WCDD011	1.00	2.00	4.87	0.005	0.078	56.8	163
25WCDD011	2.00	3.00	5.18	0.005	0.083	87.4	224
25WCDD011	3.00	4.00	4.60	0.005	0.016	160.5	257
25WCDD011	4.00	5.00	7.46	0.010	0.057	397	564
25WCDD011	5.00	6.00	28.10	0.010	0.070	308	320
25WCDD011	6.00	7.00	34.50	0.010	0.056	140.5	332
25WCDD011	7.00	8.00	11,878.00	0.440	0.437	290	695
25WCDD011	8.00	9.00	910.00	0.050	0.230	69.2	587
25WCDD011	9.00	10.00	69.20	0.010	0.242	1040	830
25WCDD011	10.00	11.00	90.00	0.020	0.093	3450	1005
25WCDD011	11.00	12.00	218.00	0.020	0.106	6140	1445
25WCDD011	12.00	13.00	92.50	0.060	0.149	2330	1595
25WCDD011	13.00	13.50	73.10	0.060	0.307	6800	1815
25WCDD011	13.50	14.00	190.00	0.070	0.298	7550	2010
25WCDD011	14.00	15.00	226.00	0.090	0.143	4450	2280
25WCDD011	15.00	16.00	100.00	0.040	0.129	3310	1395
25WCDD011	16.00	17.00	78.90	0.010	0.066	1730	875
25WCDD011	17.00	18.00	149.00	0.010	0.051	1130	393
25WCDD011	18.00	19.00	181.00	0.010	0.087	2290	437
25WCDD011	19.00	20.00	125.00	0.010	0.106	488	241
25WCDD011	20.00	21.00	105.00	0.010	0.055	574	113
25WCDD011	21.00	22.00	164.00	0.020	0.043	1120	276
25WCDD011	22.00	23.00	11.60	0.020	0.114	1265	843
25WCDD011	23.00	24.00	6.64	0.030	0.066	1015	1000
25WCDD011	24.00	25.00	12.05	0.020	0.043	453	844
25WCDD011	25.00	26.00	97.70	0.010	0.060	531	788

Hole_ID	From	To	Ag g/t	Λυ σ/ +	Cu %	Dh nnm	Zn ppm
25WCDD011	26.00	26.50	Ag g/t 928.00	Au g/t 0.020	0.089	Pb ppm 876	1115
25WCDD011 25WCDD011	26.50	26.77		1.900	0.089	1275	1575
		28.00	8,950.00			1445	
25WCDD011	26.77		461.00	0.160	0.074		1325
25WCDD011	28.00	29.00	96.40	0.100	0.085	5370	1105
25WCDD011	29.00	31.00	64.20	0.020	0.038	1725	696
25WCDD011	31.00	32.00	47.80	0.010	0.128	800	389
25WCDD011	32.00	33.00	15.40	0.005	0.050	70.3	148
25WCDD011	33.00	34.00	11.50	0.005	0.046	111	179
25WCDD011	34.00	35.00	14.75	0.005	0.068	80.7	124
25WCDD011	35.00	36.00	12.70	0.005	0.044	73.4	151
25WCDD011	36.00	37.00	14.05	0.005	0.073	103.5	286
25WCDD011	37.00	38.00	21.70	0.005	0.044	56.6	102
25WCDD011	38.00	39.00	10.55	0.005	0.049	100.5	208
25WCDD011	39.00	40.00	11.45	0.005	0.059	97.2	132
25WCDD011	40.00	41.00	11.00	0.005	0.055	34.4	295
25WCDD011	41.00	42.00	4.43	0.005	0.023	125	258
25WCDD011	42.00	43.00	28.80	0.005	0.033	2420	655
25WCDD011	43.00	44.00	3.19	0.010	0.047	139.5	324
25WCDD011	44.00	45.00	4.04	0.010	0.062	325	532
25WCDD011	45.00	46.00	12.55	0.010	0.031	96.7	342
25WCDD011	46.00	47.00	4.37	0.010	0.054	99.7	352
25WCDD011	47.00	48.00	375.00	0.100	0.284	541	738
25WCDD011	48.00	49.00	14.80	0.010	0.061	75.8	341
25WCDD011	49.00	50.00	109.00	0.020	0.033	58.6	164
25WCDD011	50.00	51.00	2,670.00	0.080	0.053	123.5	198
25WCDD011	51.00	52.00	2,770.00	11.100	0.055	5270	509
25WCDD011	52.00	53.00	2,340.00	0.070	0.043	818	262
25WCDD011	53.00	54.00	20.50	0.010	0.040	87.4	159
25WCDD011	54.00	55.00	135.00	0.010	0.572	254	430
25WCDD011	55.00	56.00	35.10	0.070	0.095	107.5	310
25WCDD011	56.00	57.00	33.80	0.010	0.123	110.5	236
25WCDD011	57.00	58.00	5.79	0.005	0.030	18.3	78
25WCDD011	58.00	59.00	21.70	0.005	0.054	59.2	146
25WCDD011	59.00	60.00	32.60	0.005	0.053	128	183
25WCDD011	60.00	61.00	21.00	0.005	0.030	18.4	91
25WCDD011	61.00	62.00	9.39	0.010	0.092	94.7	297
25WCDD011	62.00	63.00	81.80	0.340	0.043	632	344
25WCDD011	63.00	63.60	2,500.00	5.510	0.236	3340	4340
25WCDD011	63.60	64.04	19,442.50	1.590	0.973	10000*	4680
25WCDD011	64.04	65.00	10,461.00	0.180	0.791	10000*	7540
25WCDD011	65.00	65.55	289.00	0.020	0.412	7260	4330
25WCDD011	65.55	66.38	186.00	0.050	0.199	2210	3980

Hole_ID	From	То	Ag g/t	Au g/t	Cu %	Pb ppm	Zn ppm
25WCDD011	66.38	67.00	318.00	0.050	0.030	1570	954
25WCDD011	67.00	68.00	127.00	0.010	0.027	453	386
25WCDD011	68.00	69.00	11.90	0.005	0.016	177.5	326
25WCDD011	69.00	70.00	6.25	0.005	0.018	230	728
25WCDD011	70.00	71.00	57.60	0.005	0.163	55.4	119
25WCDD011	71.00	72.10	27.90	0.005	0.073	31.6	101
25WCDD011	74.10	75.00	81.50	0.010	0.310	136	686
25WCDD011	75.00	76.00	11.40	0.005	0.048	90.2	669
25WCDD011	76.00	77.00	12.55	0.010	0.033	28.6	118
25WCDD011	77.00	78.00	7.89	0.005	0.017	38.7	68
25WCDD011	78.00	79.00	13.90	0.005	0.031	63.4	205
25WCDD011	79.00	80.00	11.00	0.005	0.027	65.4	128
25WCDD011	80.00	81.00	54.80	0.005	0.092	245	484
25WCDD011	81.00	82.00	6.34	0.010	0.064	313	710
25WCDD011	82.00	83.00	247.00	0.010	0.221	922	2320
25WCDD011	83.00	84.00	69.30	0.010	0.136	1255	3140
25WCDD011	84.00	85.00	76.20	0.010	0.103	333	2890
25WCDD011	85.00	86.00	199.00	0.090	0.980	5190	4260
25WCDD011	86.00	87.00	40.50	0.010	0.075	245	2060
25WCDD011	87.00	88.00	115.00	0.010	0.228	76.3	681
25WCDD011	88.00	88.70	21.40	0.005	0.060	139	528
25WCDD011	92.90	94.00	11.75	0.010	0.056	295	427
25WCDD011	94.00	95.00	4.12	0.090	0.026	56.1	306
25WCDD011	95.00	96.00	22.10	0.005	0.038	159.5	181
25WCDD011	96.00	97.00	14.60	0.005	0.047	102	284
25WCDD011	97.00	98.00	23.50	0.010	0.070	94	342
25WCDD011	98.00	99.00	20.90	0.010	0.024	40	202
25WCDD011	99.00	100.00	70.70	0.010	0.029	56.7	161
25WCDD011	100.00	101.00	66.00	0.020	0.031	72	1230
25WCDD011	101.00	102.00	14.45	0.005	0.032	51.8	190
25WCDD011	102.00	103.00	45.80	0.005	0.135	107.5	383
25WCDD012	0.00	1.00	9.67	0.010	0.360	125	248
25WCDD012	1.00	2.00	24.90	0.010	0.549	114.5	258
25WCDD012	2.00	3.00	3.33	0.005	0.253	22.1	435
25WCDD012	3.00	4.00	17.20	0.005	0.104	18.6	258
25WCDD012	4.00	5.00	28.40	0.005	0.151	158	408
25WCDD012	5.00	6.00	12.80	0.005	0.399	325	877
25WCDD012	6.00	7.00	7.08	0.005	0.295	3000	1005
25WCDD012	7.00	8.00	4.42	0.005	0.281	2560	1250
25WCDD012	8.00	9.00	5.12	0.005	0.181	3000	1365
25WCDD012	9.00	10.00	3.45	0.005	0.141	2800	1050
25WCDD012	10.00	11.00	48.80	0.020	0.188	4830	917

Hole_ID	From	То	Ag g/t	Au g/t	Cu %	Pb ppm	Zn ppm
25WCDD012	11.00	12.00	14.85	0.010	0.254	4440	1215
25WCDD012	12.00	13.00	10.10	0.005	0.233	2580	1470
25WCDD012	13.00	14.00	1,455.00	0.410	0.271	6790	2060
25WCDD012	14.00	15.00	334.00	0.220	0.187	10000*	2120
25WCDD012	15.00	16.00	39.00	0.040	0.167	5100	1610
25WCDD012	16.00	17.00	17.90	0.020	0.309	3420	1870
25WCDD012	17.00	18.00	8.30	0.030	0.301	3240	1715
25WCDD012	18.00	19.00	32.00	0.030	0.261	4550	1780
25WCDD012	19.00	20.00	9.46	0.010	0.069	1405	1045
25WCDD012	20.00	21.00	56.70	0.030	0.044	1665	896
25WCDD012	21.00	22.00	26.90	0.020	0.043	1295	1095
25WCDD012	22.00	23.00	14.40	0.010	0.040	1555	1025
25WCDD012	23.00	24.00	7.34	0.005	0.056	1565	1115
25WCDD012	24.00	25.00	52.50	0.290	0.066	1765	1060
25WCDD012	25.00	26.00	82.40	0.020	0.051	231	721
25WCDD012	26.00	27.00	886.00	0.005	0.162	1190	1365
25WCDD012	27.00	28.00	877.00	0.010	0.022	4590	8890
25WCDD012	28.00	29.00	73.80	0.005	0.082	331	881
25WCDD012	29.00	29.50	25.30	0.005	0.085	79.3	315
25WCDD012	29.50	30.00	104.00	0.010	0.581	220	301
25WCDD012	30.00	31.00	10.65	0.005	0.061	77.7	191
25WCDD012	31.00	31.50	17.45	0.005	0.063	82.1	428
25WCDD012	31.50	32.00	120.00	0.010	0.419	58.3	346
25WCDD012	32.00	33.00	13.90	0.005	0.066	445	312
25WCDD012	33.00	34.00	4.89	0.005	0.010	175	72
25WCDD012	34.00	35.00	1.20	0.005	0.002	30.6	10
25WCDD012	35.00	36.00	207.00	0.010	0.029	2780	279
25WCDD012	36.00	37.00	9.68	0.005	0.037	84.2	145
25WCDD012	37.00	38.00	1.43	0.010	0.018	168	134
25WCDD012	38.00	39.00	0.42	0.005	0.003	113.5	131
25WCDD012	39.00	40.00	2.06	0.005	0.011	117	272
25WCDD012	40.00	41.00	2.73	0.005	0.015	146	412
25WCDD012	41.00	42.00	0.71	0.005	0.010	148.5	691
25WCDD012	42.00	43.00	2.08	0.005	0.037	146.5	216
25WCDD012	43.00	44.00	0.62	0.005	0.008	63.7	105
25WCDD012	44.00	45.00	0.44	0.005	0.016	36.4	27
25WCDD012	45.00	46.00	0.53	0.005	0.017	70.3	88
25WCDD012	46.00	47.00	0.97	0.005	0.024	63.2	178
25WCDD012	47.00	48.00	0.18	0.005	0.003	20.3	47
25WCDD012	48.00	49.00	0.12	0.005	0.001	17.4	49
25WCDD012	49.00	50.00	0.16	0.005	0.003	27.8	106
25WCDD012	50.00	51.00	0.46	0.005	0.007	60.7	185

Hole_ID	From	То	Ag g/t	Au g/t	Cu %	Pb ppm	Zn ppm
25WCDD012	51.00	52.00	0.19	0.005	0.003	43	101
25WCDD012	52.00	53.00	0.12	0.005	0.001	30.2	57
25WCDD012	53.00	54.00	0.45	0.005	0.001	55.9	30

^{*} above upper detection limit of 10,000g/t for the analytical method for Pb



Appendix D

JORC Code, 2012 – Table 1 - Inaugural Diamond Drill Program, Elizabeth Hill Project

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	 Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. 	 The historical exploration activities mentioned in this release have been obtained from open file data (WAMEX reports) extracted by Alien Metals, and other historical databases that Alien Metals has used to compile a master database.
	minung the broad meaning or earlipsing.	The Competent Person (CP) confirms that sufficient spot checks of data
	Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.	in the Alien Metals master database, for selected historical drill holes, have been performed with the original WAMEX reports to verify the data extracted or captured in digital format, is as presented. The CP considers
	 Aspects of the determination of mineralisation that are Material to the Public Report. 	the data is fit for purpose for planning further exploration.
	In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m	 Data including procedure documentation have been obtained from Alien Metals.
	samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual	 West Coast Silver is undertaking a full validation of the nature and quality of the historical drill sampling undertaken.
	commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	 West Coast Silver has however done sufficient verification of the sampling techniques, and in the CP's opinion it provides sufficient confidence that sampling was performed to adequate industry standards and is fit for the purpose of planning exploration programmes and generating targets for investigation.
		 All references to mineralisation are taken from reports and documents prepared by previous explorers that have been reviewed by West Coast Silver and considered to be fit for purpose.
		The CP concluded that results highlighted by West Coast Silver are

WA 6872, Australia



Criteria	JORC Code explanation	Commentary
		anomalous and warrant further investigation, based on his experience in the areas of the Company project.
		Drilling:
		West Coast Silver Drilling
		 Samples for laboratory analyses were taken by sawing the DD core in half along a cutting line, which is offset from the core orientation line. The half of the drill core, sample length of typically 1m, without the orientation line is collected for assaying. Duplicate samples were collected by sawing the remaining half core into two quarter cores, taking a quarter core but preserving the quarter core with the orientation line on it. Original and QAQC samples (CRM standards, blanks and core duplicates) were sent to the laboratory for analysis (ALS Perth for all elements and secondary assaying at ALS Langley Canada for any over grade Ag assays).
		 Entire DD samples were crushed (CRU-21) then fine crushed (CRU-31) to 70% passing 2mm. The sample was then split with a Boyd Rotary Splitter (SPL-22Y) and a 250g split sample was subsequently pulverised (method PUL-25a) to 85% passing 75 µm. These preparation methods are standard and appropriate for the samples.
		Alien Metals Drilling
		 Industry standard sampling techniques have been applied at the Project.
		 RC drilling was used to obtain 1m samples.
		 A cone, or occasionally a riffle splitter, was used to obtain a representative 2.5kg – 3.5kg sample into a uniquely pre-numbered calico bag and placed on the ground next to the remainder of the 1m sample. The samples were placed in order on the ground in ordered rows.
		 When water was produced by the hole, samples were continued to be taken with care to get as representative a sample per metre as possible.



Criteria	JORC Code explanation	Commentary
		Water was expelled after rod change to reduce the amount of water in the ensuing samples. All efforts were made to ensure representative samples in wet conditions were taken. Notes were made on logging sheets for large volumes of water to ensure interpretation was consistent in the holes. The CP is unable to verify whether any contamination was recorded in the drill logs.
		 For some RC drilling intervals, sampling was completed using 2m or 4m composite sample intervals. When compositing, a uniquely numbered calico bag was used and the sample was collected by using a scoop through the sample pile to ensure the sample was as representative as possible.
		 DD was used in some drill holes. DD samples were cut half core samples which were sampled under geological supervision to geological contacts, or up to 1m intervals.
		 The samples, along with QAQC samples, were transferred from the field or the secure core processing facility by Company staff to a secure yard for transport via freight contractors who delivered the samples and obtained chain of custody documentation to the nominated laboratory.
		 Certified Reference Materials (CRM) (standards) and blanks were inserted approximately every 25 samples. Additionally, RC field duplicates were also completed for nominated intervals, approximately 1 in 50 samples.
		 RC samples were oven dried, reduced by riffle splitting to 3kg as required and pulverised in a single stage process to 85% passing 75 µm. After assaying, approximately 200g of pulp material was returned to Alien Metals for storage and potential re-assay at a later date.
		 DD samples were oven dried, crushed to a nominal 10mm by a jaw crusher, reduced by riffle splitting to 3kg, as required, and pulverised in a single stage process to 85% passing 75 µm. After assaying,



Criteria	JORC Code explanation	Commentary
		approximately 200g of pulp material was returned to Alien Metals for storage and potential re-assay at a later date.
		Samples were analysed by Bureau Veritas in Perth.
		Pre-2021 Historical Drilling
		 Early-stage exploration work comprised rotary air blast (RAB), reverse circulation (RC) percussion and diamond (core) drilling (DD). Sampling is not always documented in the historic reports. However, sampling has been described for drilling by East Coast Minerals NL and Legend Mining Ltd in the early 2000's. Single metre RC drill samples were collected where mineralisation was expected. RC drill composite samples for this drilling were riffle split from 1m drill spoils and then spear sampled as 2, 3 or 4m composites.
		 Laboratory protocols are not available to determine the laboratory sample size.
Drilling	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, Drill type (eg core, reverse circulation, open-hole hammer, rotary air b	West Coast Silver Drilling
techniques	auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	 Drilling was undertaken with a track-mounted LF90Ds with operational dip angles of -90° to -30° and capable of drilling HQ core to 600m. Core was recovered in a standard tube. All the core in this program was drilled HQ.
		 Core was orientated using a Reflex ACT III HQ tool.
		 Drill holes collar azimuths were surveyed using an IMDEX TN14 Gyro and Compass and down hole surveys were collected using a Reflex Omni X-42 tool.
		Alien Metals Drilling
		For RC drilling, an industry standard face sampling type RC hammer and drill bit was used, with chip samples returned within the drill pipe and



Criteria	JORC Code explanation	Commentary
		recovered through a cyclone. Holes were drilled at various azimuths and dips to varying depths. Hole diameter is a nominal 133mm.
		 Diamond drilling was completed by utilisation of a top drive diamond core drilling rig which used an industry standard core barrel and wireline set up. Core was orientated, when possible, on 3m runs. Core was NQ in size (~47.6mm diameter).
		Pre-2021 Historical Drilling
		 Drilling methods included RAB, RC percussion and diamond drilling.
		 At this time, hole diameters and detailed information regarding drilling has not been compiled and are not considered material to supporting the assessment of prospectivity and further regional exploration.
Drill sample	Method of recording and assessing core and chip sample recoveries and	West Coast Silver Drilling
recovery	 Measures taken to maximise sample recovery and ensure representative nature of the samples. 	 Core recovery was systematically recorded from the commencement of diamond coring to the end of hole; by reconciling against driller depth blocks, production plods and knowledge obtained from visual inspection.
	Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of	 Core recoveries typically averaged above 90% with isolated minor zones of lessor recovery.
	fine/coarse material.	 No relationship has been established between core recovery and grade. There is no reason to expect any sampling bias.
		 Detailed core recovery data is maintained throughout the program as part of the geotechnical logging.
		Alien Metals Drilling
		 The geologist visually assessed RC drill sample recoveries during the program for each metre and these were overall very good. Intervals of poor recovery are noted on the log sheet.



Criteria	JORC Code explanation	Commentary
		 Drill cyclone was cleaned after each 6m run during the drilling of the hole and also between holes to minimise down hole or cross-hole contamination.
		Some drill intervals were wet, and these intervals were collected into plastic bags.
		For DD, the core recovery is noted for each interval on the log sheet.
		All drillers, at all times, are directed that quality and recovery of sample are of upmost importance.
		No relationship between sample recovery and grade has been recognised.
		Pre-2021 Historical Drilling
		 West Coast Silver is undertaking validation of the historical data to determine whether this information has been collected in full. Only limited data is available in the open file reports addressing this criterion. However, for early stage, regional grass roots exploration the CP regards the absence of this information is not considered material.
		These criteria will be validated within the Elizabeth Hill historic mine environment with twinning historic drill holes.
Logging	Whether core and chip samples have been geologically and	West Coast Silver Drilling
	geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.	Diamond drill core is orientated, and geologically and geotechnically logged by an experienced team of geologists into spreadsheets on a
	Whether logging is qualitative or quantitative in nature. Core (or costean, phonon leafs) photography.	laptop computer and the data stored in a database.
	channel, etc) photography.	 All core logging was both qualitative and quantitative in nature.
	The total length and percentage of the relevant intersections logged.	Photographs are taken prior to the cutting and sampling of the core; the



Criteria	JORC Code explanation	Commentary
		core is wetted to improve the visibility of features in the photographs.
		Alien Metals Drilling
		 All RC drill holes have been geologically logged for lithology, weathering, and other features of the samples using sieved rock chips from the drill sample piles. The level of geological detail is commensurate with the nature and limitations of this exploratory drilling technique.
		 All DD core is logged for core loss, marked into metre intervals, orientated, when possible, structurally logged, and logged with a hand lens with the following parameters recorded where observed: weathering, regolith, rock type, alteration, mineralisation, shearing/foliation and any other features that are present.
		All DD core is photographed both wet and dry after logging, before cutting.
		 All drill holes were logged in full and logging is of a sufficient quality for the information to be used in future Mineral Resource Estimates, mining studies and metallurgical studies.
		 Data relating to geological observations and the sampling intervals was entered into a standard industry database.
		Pre-2021 Historical Drilling
		 Most historic drill holes were geologically logged to various degrees of detail.
		 West Coast Silver is undertaking verification of the quality and level of detail of the geological logging data.
		 West Coast Silver has done sufficient verification of the data, in the CP's opinion to provide sufficient confidence the logging was performed to adequate industry standards and is fit for the purpose of planning



Criteria	JORC Code explanation	Commentary
		exploration programmes and generating targets for investigation.
Sub-sampling	If core, whether cut or sawn and whether quarter, half or all core taken.	West Coast Silver Drilling
techniques and sample preparation	 If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. 	 Samples for laboratory analyses were taken by sawing the DD core in half along a cutting line, which is offset from the core orientation line. The half of the drill core, sample length of typically 1m, without the orientation
	 For all sample types, the nature, quality and appropriateness of the sample preparation technique. 	line is collected for assaying. Duplicate samples were collected by sawing the remaining half core into two quarter cores, taking a quarter core but
	 Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. 	preserving the quarter core with the orientation line on it. Original and QAQC samples (CRM standards, blanks and core duplicates) were sent to the laboratory for analysis (ALS Perth for all elements and secondary
	Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field	assaying at ALS Langley Canada for any over grade Ag assays).
	duplicate/second-half sampling.	 Entire DD samples were crushed (CRU-21) then fine crushed (CRU-3- to 70% passing 2mm. The sample was then split with a Boyd Rotal Splitter (SPL-22Y) and a 250g split sample was subsequently pulverise (method PUL-25a) to 85% passing 75 µm. These preparation method are standard and appropriate for the samples.
	 Whether sample sizes are appropriate to the grain size of the material being sampled. 	
		 The 1m half core samples are appropriate to the grain size of the material being sampled.
		Alien Metals Drilling
		 All RC samples were put through a cone splitter and the sample was collected in a unique pre-numbered calico sample bag. The moisture content of each sample was recorded in the database.
		 The RC samples were sorted, oven dried, the entire sample was pulverised in a one stage process to 85% passing 75 µm. The bulk pulverised sample was then bagged and approximately 200g extracted by spatula to a numbered paper bag that was used for the assay charge.
		The DD core samples were cut in half and the right half of the core was



Criteria	JORC Code explanation	Commentary
		submitted for assay. They are oven dried, jaw crushed to nominal <10mm, 3.5kg was obtained by riffle splitting and the remainder of the coarse reject was bagged while the 3.5kg was pulverised in a one stage process to 85% passing 75 µm. The bulk pulverised sample was then bagged and approximately 200g extracted by spatula to a numbered paper bag that was for the assay charge.
		 For some RC drilling, typically in areas where the geologist decides that there is no mineralisation, 4m were taken and used for assay. The RC drill spoil samples were collected by traversing each sample pile systematically by scoop to obtain similar volumes of representative material for the nominated composite interval. This is regarded as a fit for purpose sampling regime for the type of drilling and the current stage of exploration.
		 Field duplicate RC sampling was also undertaken with the drillers collecting a duplicate at the same time as the main sample off the second sample port on the cone splitter or re-splitting of the reject interval if using a riffle splitter.
		• The samples were then sent to Bureau Veritas Laboratory in Perth for sample preparation and analysis. At the laboratory, the samples were sorted and discrepancies to documentation notified to the Company, oven dried, crushed to -10mm for core samples, riffle split if oversize and the bulk reject was retained. The sample was then pulverised in a vibrating disc pulveriser in a single step to 95% passing 105um, a ~200g was split off and bagged for analysis and the bulk reject was retained. The sample sizes are appropriate for the geology and style of mineralisation being investigated.
		Pre-2021 Historical Drilling
		 Various sampling methods have been employed previously for non-core drilling. Information is available for some anomalous drill holes discussed



Criteria	JORC Code explanation	Commentary
		 in this report. The CP cannot confirm but expects the DD core was cut and sampled according to industry standard (half core) techniques. Information on sample moisture content is available for some drilling. Where available most samples were dry. Information on sample preparation is not available for most drilling. Information for quality control procedures for all subsampling is not available for most drilling. Sample sizes have not been described in historic reports. Information on field duplicates is not available in historic reports.
Quality of assay data and laboratory tests	 The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometres, handheld XRF instruments, etc, the parametres used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	 Laboratory samples were analysed at ALS laboratories (Perth) for 48 elements, four acid digestion and ICP-MS finish. Samples with above upper detection limit analyses were then analysed at ALS laboratories (Langley, Canada) with Ag-OG62 (four acid, ore grade Ag), ME-OG62 (four acid ore grade elements), Zn-OG62 (ore grade Zn – four acid), Ag-GRA21 (Ag 30g FA-GRAV finish), Au-AA26 (ore grade Au 50g FA AA finish and Ag-CON01 (Ag concentrate). Four acid digestion is considered a near total digestion. Commercial standards (OREAS-353b, OREAS-602c, GEOSTATS G919-2 and GEOSTATS GBM313-11) were inserted after every sample which number ends 25, a blank sample was inserted after every sample which number ends in 75. Duplicate samples (quarter core) were taken of every sample which number ends in 49 and 99.



Criteria	JORC Code explanation	Commentary
		Acceptable levels of accuracy and precision have been established.
		Alien Metals Drilling
		 Assaying was completed by Bureau Veritas Laboratory in Perth, an accredited commercial laboratory. All sample results have been received.
		 For both RC and DD drilling samples, appropriate commercial CRM standards, blanks and field duplicates were submitted at the rate of around 5% of all samples.
		 An aliquot of sample is fused with Sodium Peroxide and the melt is dissolved in dilute hydrochloric acid and the solution analysed via Inductively Coupled plasma (ICP) Mass Spectrometry (MS). The detection limit for Ag is 5g/t.
		 As part of normal procedures, the Company examines all standards and blanks to ensure that they are within tolerances. Additionally, sample size, grind size and field duplicate results are examined to ensure no bias to silver grade exists.
		Pre-2021 Historical Drilling
		 Assaying and laboratory procedures are not available for most historical drilling. However, where available this information is described as below.
		 Samples have been sent to Genalysis Laboratories for analysis of Ag only by a two-acid (perchloric/hydrochloric) digest with AAS finish (lab code C/AAS) to a detection limit of 1ppm.
		 Some drill samples of each batch were check analysed at Genalysis and Ultra Trace Laboratories by an accelerated cyanide leach with an AAS finish (lab code Leachwell/AAS) to a detection limit of 1ppm.
		 Some samples of each batch were also analysed by Genalysis for Ag only by an Aqua Regia digest with an AAS finish (lab code B/AAS) to a



detection limit of 0.1ppm. The tenor of results from different analytical techniques and different laboratories was generally comparable. The CP cannot independently verify the QAQC of these analyses. • C/AAS is considered a partial extraction. • West Coast Silver has done sufficient verification of the assay data, and in the CP's opinion it provides sufficient confidence the assaying was appropriate for the mineralisation present and is fit for the purpose of planning exploration programmes and generating targets for investigation. • None of the previous reports that have been reviewed by West Coast Silver to date specified the use of any spectrometers or handheld XRF tools. • The verification of significant intersections by either independent or atternative company personnel. • The use of twinned holes. • The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data. • Discuss any adjustment to assay data. • Dirill core intersections were verified by both company and independent personnel. • Dirill core intersections were verified by both company and independent personnel. • Dirill core intersections were verified by both company and independent personnel. • Dirill core intersections were verified by both company and independent personnel. • Laboratory analyses for drill core samples have not been adjusted. Alien Metals Drilling	Criteria	JORC Code explanation	Commentary
Drill collar data, sample information, logging data and assay results have been verified, compiled, and validated by a separate person to the person conducting the logging and sampling.	sampling and	 The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. 	detection limit of 0.1ppm. The tenor of results from different analytical techniques and different laboratories was generally comparable. The CP cannot independently verify the QAQC of these analyses. • C/AAS is considered a partial extraction. • West Coast Silver has done sufficient verification of the assay data, and in the CP's opinion it provides sufficient confidence the assaying was appropriate for the mineralisation present and is fit for the purpose of planning exploration programmes and generating targets for investigation. • None of the previous reports that have been reviewed by West Coast Silver to date specified the use of any spectrometers or handheld XRF tools. West Coast Silver Drilling • Of the two DD holes reported to date, out of the 12 holes drilled by West Coast Silver, a single Alien Metals RC drill hole (22AMC001) was twinned to verify the nature of the geology and mineralisation. • Drill core intersections were verified by both company and independent personnel. • Primary data have been entered into spreadsheets on laptops which then have been verified and entered into the data base. • Laboratory analyses for drill core samples have not been adjusted. Alien Metals Drilling • Drill collar data, sample information, logging data and assay results have been verified, compiled, and validated by a separate person to the person



Criteria	JORC Code explanation	Commentary
		All laboratory reports have been received.
		 All sample data is stored digitally in an offsite, secure, database (MX Deposit) and has been audited by independent external database specialists (Expedio Services, a Perth based geological consultancy).
		 Many of these holes are within 20m of previous RC and DD drilling. Results of this drilling confirm the location, widths and grade tenor of the existing drilling.
		Pre-2021 Historical Drilling
		 Significant intersections have been taken from previous databases. The CP completed several spot checks of the source data and did not identify any issues with the reported intersections.
		 West Coast Silver has done sufficient verification of the data, and in the CP's opinion it provides sufficient confidence that data entry, data verification, and data storage was performed to adequate industry standards and is fit for the purpose of planning exploration programmes and generating targets for investigation.
		No adjustments have been made to any assay data.
Location of data	Accuracy and quality of surveys used to locate drill holes (collar and	West Coast Silver Drilling
points	 down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	 2025 drill holes were initially located using handheld GPS, with accuracy to within 5m. At the completion of the drilling, collars have been located using a Emlid Reach RS2+ Differential GPS (DGPS) with a horizontal accuracy of 7mm and a vertical accuracy of 14mm. 2025 drilling uses downhole gyro for surveys which is uploaded to the
		IMDEX HUB-IQ cloud based storage.
		A 0.5m DTM is used for topographic control.



Criteria	JORC Code explanation	Commentary
		Data has been collected in GDA94/MGA Zone 50.
		Alien Metals Drilling
		 Drill hole collar locations were located using a handheld GPS with an expected accuracy of +/-3m for easting and northing. Elevations were interpolated from the SRTM DEM grid of the area.
		 Down hole surveys using a north seeking gyro were undertaken on most of the drill holes. When no down hole survey was available, the collar dip and azimuth were used.
		 A Mineral Resource or Ore Reserve is not determined.
		 Several grid systems have been used previously, including AGD 1966 AMG Zone 50, AGD 1984 AMG Zone 50 and GDA 1994 MGA Zone 50 and local grid systems.
		 Previous data in grid systems AGD 1966 AMG Zone 50 and AGD 1984 AMG Zone 50 and local grid systems have been converted to MGA 94 Zone 50.
		 A digital terrain model (DTM) with an accuracy for RL of 5cm was acquired with the orthophotography for part of the tenements and RLs for drill holes were adjusted to it.
		 RLs for drill holes outside the DTM have been taken from the handheld GPS or determined from the SRTM DTM (tile size 30m).
		 West Coast Silver has done sufficient verification of the data; in the CP's opinion it provides sufficient confidence in the accuracy and quality of survey data and that it is fit for the purpose of planning exploration programmes and generating targets for investigation.
		Pre-2021 Historical Drilling



Criteria	JORC Code explanation	Commentary
		Historic drill holes were located in a local grid and more recent with handheld GPS with an accuracy of ±5m.
		 Where drill collars were clearly identifiable (mainly in the Elizabeth Hill mine area), West Coast Silver surveyed the collars with a Emlid Reach RS2+ DGPS with a horizontal accuracy of 7mm and a vertical accuracy of 14mm.
		Drill hole down hole surveys in historic drilling are typically restricted to the collar set up (compass, inclinometer).
Data spacing	Data spacing for reporting of Exploration Results.	West Coast Silver Drilling
and distribution	 Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. 	 Core samples for laboratory analyses have been taken of core intervals where the geologist logged alteration and mineralisation typically on a 1m sample length but may be reduced to 0.5m or extended to 1.2m where geological parameters require.
	Whether sample compositing has been applied.	Alien Metals Drilling
		 Alien drilling was spaced 10m for diamond drill holes and between 23m and 85m for RC drill holes. The Alien drill holes were designed to verify historic drill results and test for extension of mineralization.
		No Mineral Resource or Ore Reserve are reported.
		Alien RC drill holes were composited to 4m samples and infilled to 1m where mineralization was recorded.
		Pre-2021 Historical Drilling
		Most of the historic drilling was focused on the Elizabeth Hill mine which is not the subject of this report.
		 Regional drill spacing is variable and can be assessed in Figure 1 of this report.



Criteria	JORC	Code explanation	Comm	nentary
			•	No Mineral Resource or Ore Reserve are reported.
			•	Sample compositing in historic drilling is variable and ranges from 2m to 4m.
Orientation of	•	Whether the orientation of sampling achieves unbiased sampling of	West C	Coast Silver Drilling
data in relation to geological structure		possible structures and the extent to which this is known, considering the deposit type.	•	The drilling has an average dip of -61° across the program. This dip allows the drill holes to penetrate the mineralised envelope fully.
	•	If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	•	Angled drilling is being used to investigate cross-cutting mineralised structures, with assessment ongoing.
			•	Drill holes have been oriented both at high angle and subparallel to the interpreted mineralisation hosting structure.
			•	25WCDD002 and 25WCDD011 are oriented subparallel and down plunge to the mineralisation hosting structure to test for continuity and variability of mineralisation and potential future metallurgical test work.
			Pre-20	21 Historical Drilling & Allen Metals Drilling
			•	The local stratigraphy and contained mineralisation comprising the Elizabeth Hill silver deposit has a northerly trend and a near vertical dip.
			•	The drilling was generally orientated towards the east or west with some holes angled due to rough terrain making placement of the drill rig impractical.
			•	The true orientation of mineralised bodies in this area is generally known and no bias is indicated through the drill orientation.
Sample .,	•	The measures taken to ensure sample security.	West C	Coast Silver Drilling
security			•	Drill core was transported from the drill rig to the storage facility in Karratha.

For personal use only

Criteria	JORC Code explanation	Commentary
		Drill core was stored in a secure yard in Karratha rented by the Company.
		 Diamond core samples were collected in individual calico bags and several calico bags were then stored in zip locked and labelled polyweave bags.
		The polyweave bags were transported to the ALS laboratory (Perth) by a commercial transport company.
		Alien Metals Drilling
		All drill samples collected during the program were freighted directly to the Bureau Veritas Laboratory in Perth for submission.
		 Sample security was not considered a significant risk to the project. Only employees of the Company were involved in the collection, secure core yard storage and delivery of samples to the freight companies secure yard. There was a chain of custody from receival at the freight company to the Perth laboratory.
		Pre-2021 Historical Drilling
		 Due to the historical nature of the data, this has not and may not be determinable. West Coast Silver believes that none of the historical samples have been preserved.
Audits reviews	or • The results of any audits or reviews of sampling techniques and data.	No audits or complete reviews of the sampling techniques and data has taken place by West Coast Silver or any independent parties.



Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure	 Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, 	 The results reported in this announcement refer to drill holes wholly on M47/342.
status	wilderness or national park and environmental settings.	The tenement lies within the Ngarluma Native Title claim.
	The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	The tenement is in good standing with no known impediments.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	 The Elizabeth Hill deposit and adjoining area has been explored for Ni, Cu, PGM, base metals, Li and Ag mineralisation since 1968 when US Steel International Inc explored the area for base metals and nickel.
		 Massive silver was discovered in ~1994-1995 by Legend mining NL in a percussion drilling program. Further drilling followed, and in 1997 an exploration shaft and drive were sunk by East Coast Minerals NL.
		 Underground mining at Elizabeth Hill was conducted in 1999-2000 with additional drilling completed by East Coast Minerals NL, until the project was sold to Global Strategic Metals NL in 2012. Alien Metals Ltd purchased lease M47/342 in early 2020.
		Considerable exploration for Ni, Cu, PGM was conducted by Hunter Resources dating back to the 1980s.
		Helix Resources acquired the Munni Munni Project in the late 1990's and undertook a number of scoping studies.
		 In 2002, a SRK Mineral Resource estimate for PGE and Au was published in accordance with the JORC code.
		Subsequently, Platina Resources undertook mining studies and two



Criteria	JORC Code explanation	Commentary
		 scoping studies for the PGE and Au mineralisation. West Coast Silver Limited is in the process of verifying and collating all historical data.
Geology	Deposit type, geological setting and style of mineralisation.	• The Elizabeth Hill silver mineralisation is structurally controlled and is located on the eastern boundary of the north-south trending Munni Munni Fault. Mineralisation has been intersected over a 100m north-south zone along the boundary of the Munni Munni Fault, plunging south along the granite contact. The zone has an east-west width of 15-20m with the high-grade core restricted to around 3m width in the region of the underground workings. The mineralised zone is separated into several pods and occurs within a quartz carbonate chalcedonic silica breccia that shows veining. The silver occurs in fine disseminations, needles, veins, nuggets and platelets up to several centimetres in diameter.
Drill hole Information	 A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: 	 Drill information relevant to this release has been provided above in the announcement and in Appendices A and C.
	 easting and northing of the drill hole collar 	
	 elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar 	
	o dip and azimuth of the hole	
	o down hole length and interception depth	
	o hole length.	
	 If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	



Criteria	JORC Code explanation	Commentary
Data aggregation methods	 In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	 Drill core intersections reported in this announcement have been calculated using a 25g/t Ag cut-off and are length weighted. Pb analyses of core samples have a 10,000g/t upper cut-off due to the assay technique used. No metal equivalent values are reported. Pre-2021 Historical Drilling & Alien Metals Drilling Assays reported are based on historical data in open file reports, and upon review have been treated at face value. Since these are exploration results, there has been no top cutting, and all data are presented, either graphically or in tables in this announcement. Average reporting intervals are based on reported results derived from applying cut-off grades, as listed in the summary tables, for a minimum thickness of 1m.
Relationship between mineralisation widths and intercept lengths	 These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	 Drill hole intersections are not true widths due to sub vertical geometry of the mineralised body and the average -61° dip of the drill holes in the 2025 drill program. Insufficient drilling has been carried out to determine true widths of mineralisation. Pre-2021 Historical Drilling & Alien Metals Drilling Previous drilling has been undertaken on various drill orientations and thus does not represent true width intersections. Future work by West Coast Silver will involve validation and reinterpretation of previous results and the drilling of additional holes to determine the orientation of mineralisation and thus true widths.



Criteria	JORC Code explanation	Commentary
		 The criteria of the geometry of the mineralisation with respect to drill hole angle is not applicable, as the geometry of the mineralisation with respect to the drill angles has yet to be verified.
		The intercepts reported are downhole length and the true width is not known.
Diagrams	 Appropriate maps and sections (with scales) and tabulations of intercept should be included for any significant discovery being reported The should include, but not be limited to a plan view of drill hole coll locations and appropriate sectional views. 	se
Balanced reporting	Where comprehensive reporting of all Exploration Results is r practicable, representative reporting of both low and high grades and	discussed have been reported or referenced.
	widths should be practiced to avoid misleading reporting of Explorating Results.	 The 5 elements Ag, Au, Cu, Pb and Zn have been reported only as they are deemed to be anomalous in mineralised zones. Additional elements analysed are not considered relevant.
		 Drill assay information for the West Coast Silver drilling relevant to this release has been provided above in the announcement and in Appendix B. Significant drill assay information for the historical drilling relevant to this release has been provided above in the announcement and in Appendix D.
Other substantive exploration data	 Other exploration data, if meaningful and material, should be report including (but not limited to): geological observations; geophysical surv results; geochemical survey results; bulk samples – size and method treatment; metallurgical test results; bulk density, groundwate geotechnical and rock characteristics; potential deleterious contaminating substances. 	ey have been reported or referenced. of er,
Further work	 The nature and scale of planned further work (eg tests for later extensions or depth extensions or large-scale step-out drilling). 	 Further work will include, but is not limited to, systematic geological mapping, channel and rock chip sampling, soil sampling, geophysics, structural interpretation, historic data compilation and verification, and

Page 38

22nd August 2025



Criteria	JORC	Code explanation	Commentary	
	٠	Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.		Э