

Phase 2 Drilling Contract Awarded at Elizabeth Hill Following High-Grade Silver Intercepts

Highlights

- Phase 2 drilling contract awarded to Wallis Drilling (~1,000m diamond, 2,000–3,000m air core).
- Drilling will consist of a combination of diamond and air core drilling with multiple objectives targeted
- Program to test near-surface mineralisation, potential depth extensions and step-out targets¹
- WCE's integrated geological team including ERM consultants is currently finalising defined drill targets which will further refine the drill program
- Imminent TEM₂ and magnetic surveys to feed into the targeting process
- Drilling will commence in ~4-6 weeks
- Assays from drill hole 25WCDD008 have identified further high-grade silver mineralisation zones including:
 - 6 metres at 316g/t Ag from 44 metres; including
 - 1.4 metres at 1,007g/t Ag from 45 metres
 - 21 metres at 50g/t Ag from 20 metres
- 25WCDD010 has also intersected high-grade silver mineralisation including:
 - 3.4 metres at 219g/t Ag from 63 metres
- Low grade silver mineralisation has also been intercepted in 25WCDD005 at both 165m and 171m on structures associated with the Munni Munni Fault
- These intervals demonstrate mineralisation is hosted in subsidiary structures related to the main Elizabeth Hill mineralisation event. These intercepts are well below the historical workings which was suspended at the 102m level in 2000 due to declining silver prices

¹ Refer to ASX Announcement dated 5th August 2025

² Time Domain Electromagnetic

West Coast Silver Limited (ASX: WCE) ('West Coast Silver' or the 'Company') is pleased to advise that it has awarded its phase 2 expanded drill program to Wallis Drilling. The drill program will consist of a combination of diamond and air core drilling with multiple objectives targeted including quantification of near surface mineralisation at Elizabeth Hill, testing of proven depth extensions and step out drilling to test high priority near mine targets.

WCE's integrated geological team including ERM consultants is currently finalising defined drill targets which will further refine the drill program.

Drilling will commence in ~4-6 weeks and will consist of ~1000 m of diamond drilling and 2000-3000m of air core drilling.

Commenting, Executive Chairman Bruce Garlick said:

"This follow-up drilling program is designed to build on recent high-grade results at Elizabeth Hill, including historic silver intercepts below the workings. We are eager to return to the field within weeks to test multiple growth opportunities including the priority prospective near mine targets aimed at advancing the project."

The Company has received further high-grade silver intercepts from the inaugural diamond drill program (12 holes for 1,183m) at the **high-grade Elizabeth Hill Silver Project** in the Pilbara. The Company has received the remainder of assay results for six drill holes (**25WCDD005, 25WCDD006, 25WCDD007, 25WCDD008, 25WCDD009 and 25WCDD010**) for the inaugural drilling program. From the six drill holes, further high-grade silver results were returned for **25WCDD008 and 25WCDD010** (Figure 1 and Figure 2).

Both holes intersected silver mineralisation from near surface (Table 2), with particularly impressive results from hole **25WCDD008** including:

- 6 metres at 316g/t Ag from 44 metres
 - with 1.4 metres at 1,007g/t Ag from 45 metres
- 21 metres at 50g/t Ag from 20 metres

Hole **25WCDD010** intersected:

- 3.4 metres at 219g/t Ag from 63 metres

This builds on the outstanding previously announced (West Coast Silver ASX Releases dated 16 July 2025 and 22 August 2025) near surface results including **25WCDD001** which intersected:

- 21 metres at 1,047g/t from 10 metres including
 - 8 metres at 2,632g/t from 22 metres including a spectacular interval of 1 metre at 15,071g/t from 27 metres.

Drill hole **25WCDD002** intersected:

- 15 metres at 723g/t from 1 metre including:
 - 3 metres at 2,639g/t from 1 metre.

Drill hole **25WCDD011** which intersected:

- 17 metres at 858g/t Ag from 5 metres including:
 - 2 metres at 6,349g/t Ag from 7 metres;

- 10 metres at 850g/t Ag from 47 metres and
- 13 metres at 1,615g/t Ag from 62 metres
 - including 2 metres at 10,049g/t Ag from 63 metres and

Drill hole **25WCDD012** also returned significant high-grade silver intercepts including:

- 6 metres at 317g/t Ag from 10 metres including:
 - 1m at 1,455g/t Ag from 13 metres; and
- 14 metres at 162g/t Ag from 18 metres.

Drill hole **25WCDD007** was completed as a scissor test to validate the near surface oxide mineralisation intersected in historical drill hole, EC085, that contained 18 metres at 581g/t Ag from 12 metres (West Coast Silver ASX Release dated 16 July 2025). While recent drill hole 25WCDD007 intersected 12 metres at 42g/t Ag from 15 metres and 1 metre at 121g/t Ag from 30 metres (Table 1), it confirmed the thickness but highlighted the nuggety grade distribution of the silver mineralisation in the oxide zone.

Drill hole **25WCDD009** was designed to test the down plunge extent of the near surface, oxide mineralisation between 25-30m vertically above the historical workings and intersected 4 metres at 66g/t Ag from 45 metres in the interpreted position of the Munni Munni Fault.

Drill holes **25WCDD005 and 25WCDD006** intersected minor silver intervals above a 25g/t Ag cut-off (Table 1) despite still intersecting structures containing quartz-carbonate breccias and veins below the historical Elizabeth Hill mine workings. This provides further support to the Company's interpretation that silver mineralisation plunges to the south within the Munni Munni Fault.

Table 1 – Significant Silver Intercept Table from recent drilling

Hole Number	Interval (m)	Ag (g/t)	From (m)
25WCDD005	1.0	26	165
25WCDD005	0.3	26	171
25WCDD006	NSI	-	-
25WCDD007	12.0	42	15
25WCDD007	1.0	121	30
25WCDD008	21.0	50	20
25WCDD008	6.0	316	44
including	1.4	1,007	45
25WCDD008	2.0	55	57
25WCDD009	1.0	25	22
25WCDD009	1.0	60	36
25WCDD009	0.5	104	39.25
25WCDD009	4.0	66	45
25WCDD010	3.4	219	63

Note: 25g/t Ag cut-off; NSI = No significant intersection

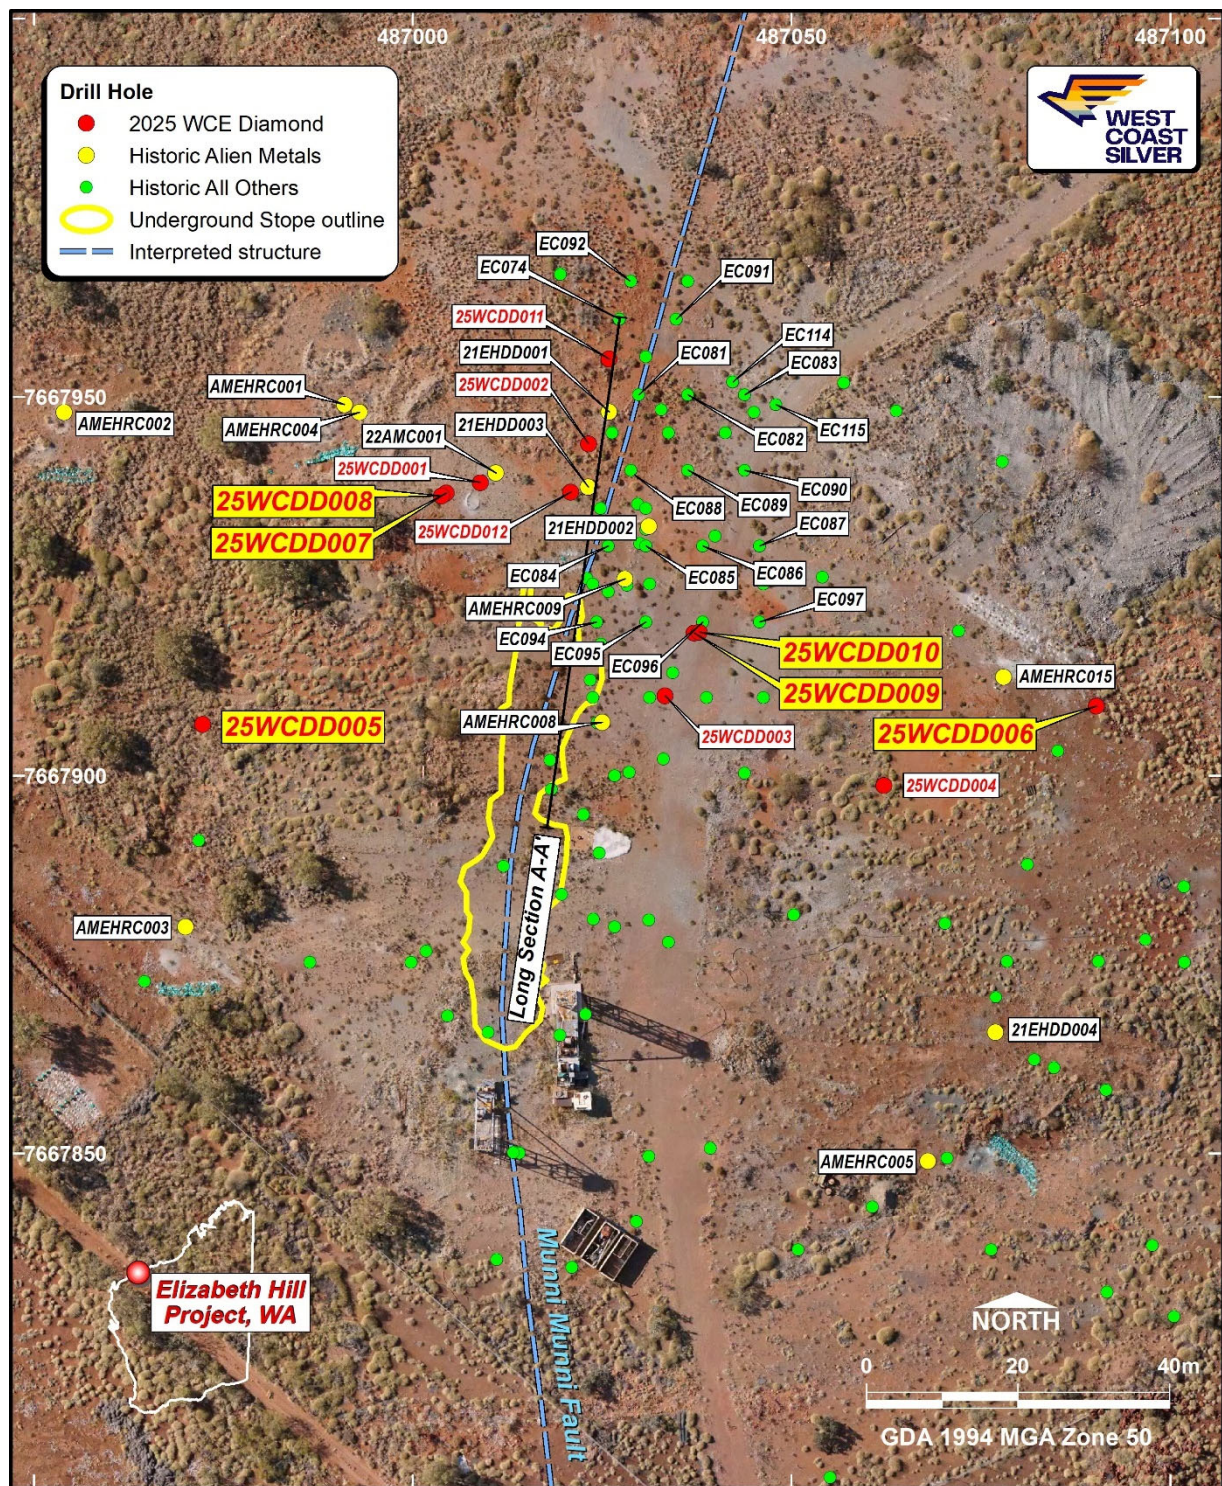


Figure 1 – Plan view of 2025 West Coast Silver diamond core drilling and historical drilling

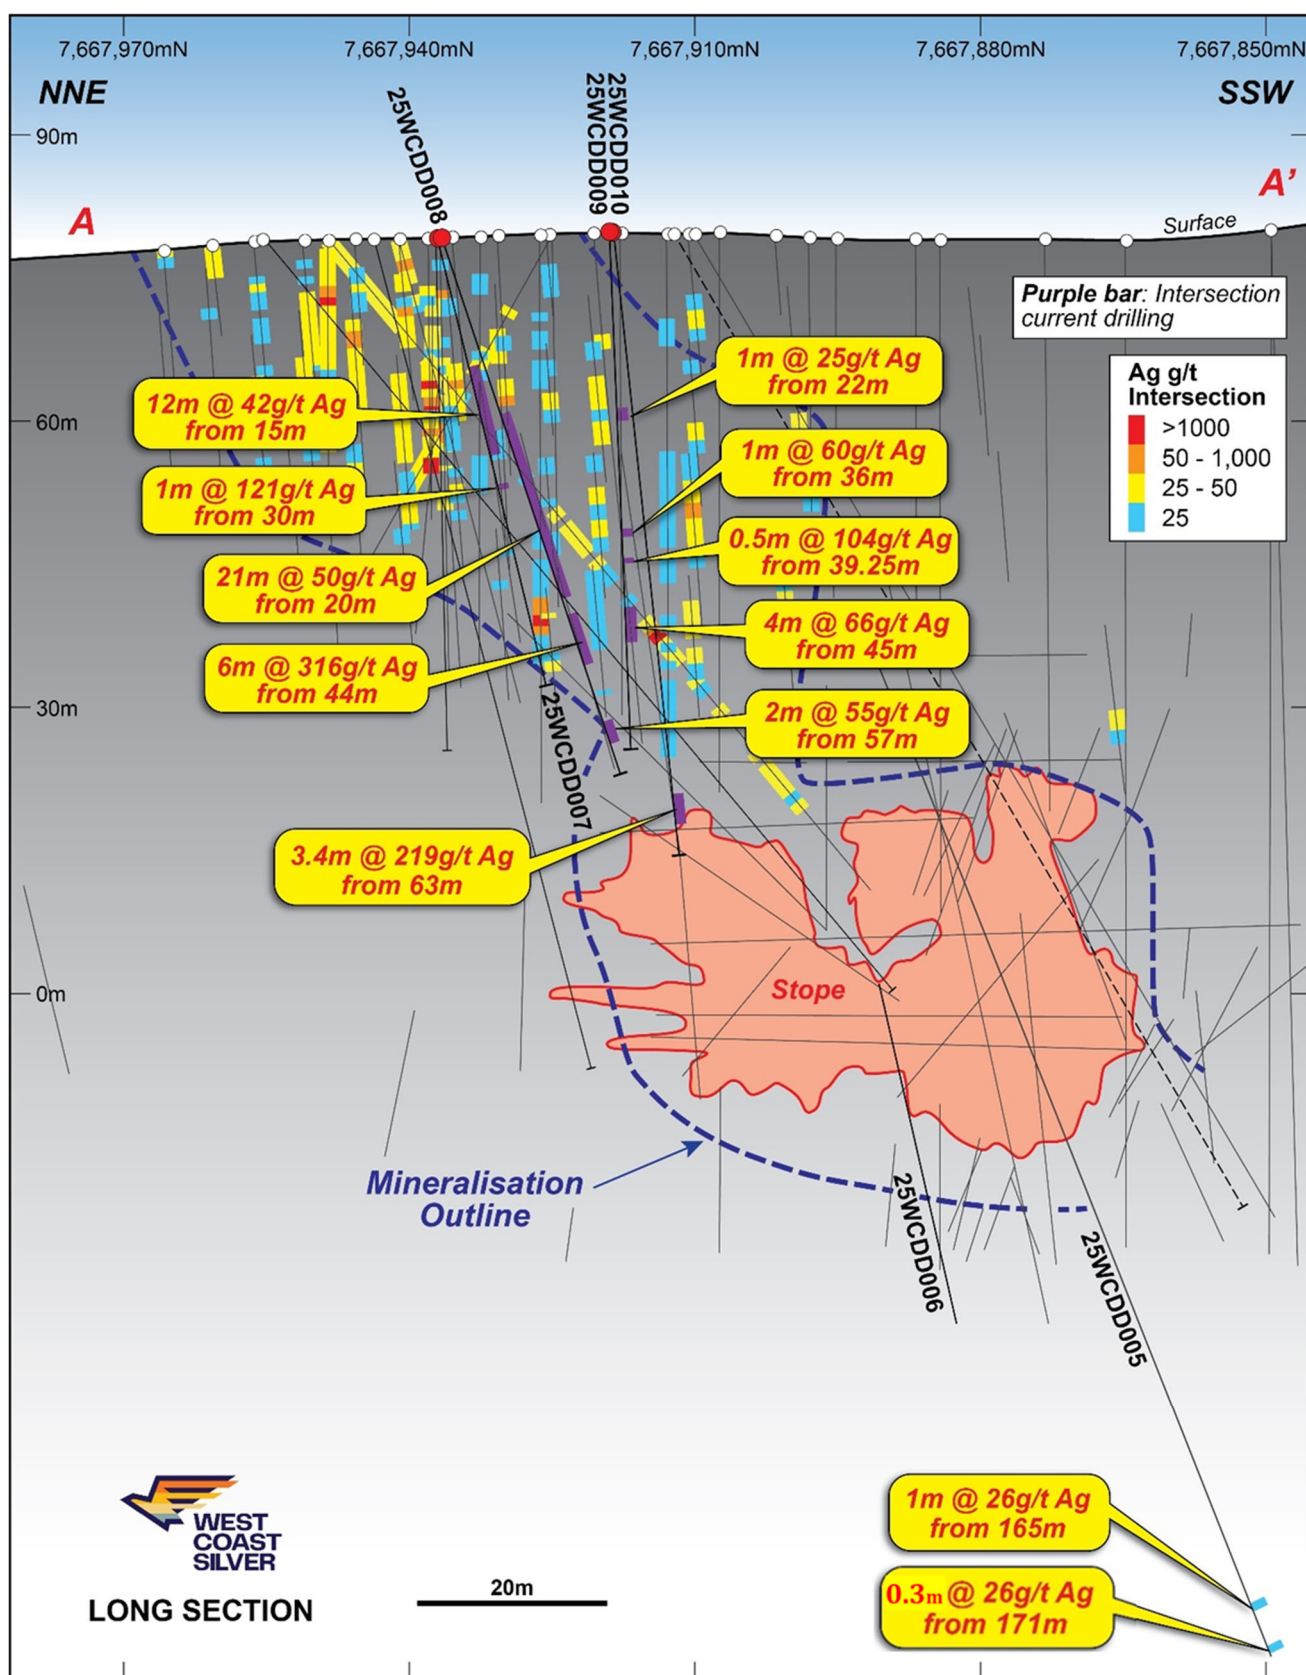


Figure 2 – Elizabeth Hill long section with recent drill holes 25WCDD005 - 25WCDD010

Notes: Long Section line A' looking ESE; refer to Figure 1 for location

Near surface mineralisation assessment

The shallow high-grade nature of these drill results gives the Company confidence in the near surface potential of Elizabeth Hill. The Company continues to work with ERM to carry out a comprehensive analysis of all historical drilling at Elizabeth Hill with a view to assess the extent of near surface mineralisation at Elizabeth Hill. This process will include any QA/QC checks required to ensure all historical data is of sufficient quality to be reported from a JORC 2012 perspective.

Inaugural Drilling Update

Twelve diamond holes have been completed at Elizabeth Hill totalling 1,183 m of drilling. Laboratory assay results have been received for the 12 diamond holes with the final six holes reported in this release.

For personal use only

The Elizabeth Hill Project

Elizabeth Hill is one of Australia's high-grade silver projects and has a proven production history outlined below:

- **High grades enabled low processing tonnes:** 1.2Moz of silver was produced from just 16,830t of ore at a head grade of 2,194g/t (70.5 oz/t Ag)³.
- **Previous mining operation ceased in 2000:** because of low silver prices (US\$5)⁴.
- **Simplistic historical processing technique:** native silver was recovered via **low-cost** gravity separation techniques.
- **Untapped potential remains** in ground with deposit open at depth and recent consolidation of land package offers potential to discover more Elizabeth Hill style deposits.
- **Tier 1 Mining Jurisdiction located on a mining lease** with potential processing option at the nearby Radio Hill site.

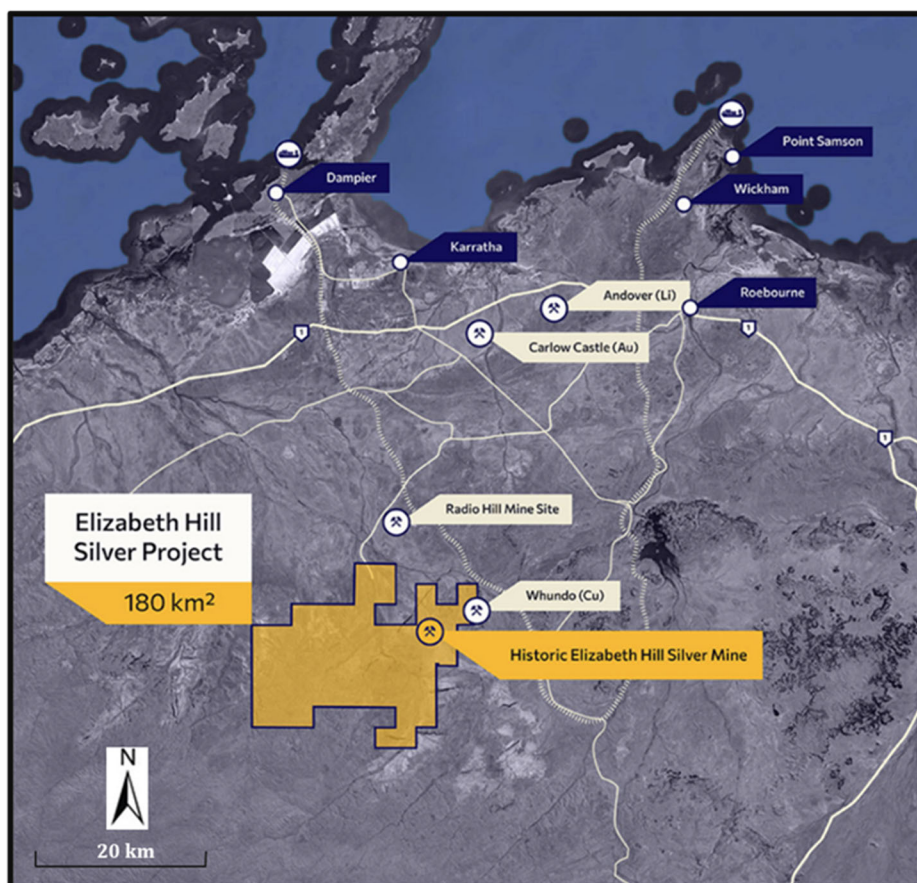


Figure 3 - Tenement Location

Through the consolidation of the surrounding land packages into a single contiguous 180km² package, significant exploration and growth potential exists both near mine and regionally. The land package holds a significant portion of the Munni Munni fault system, and other fault systems subparallel to the Munni Munni fault system, which are considered prospective for Elizabeth Hill look-a-like silver deposits.

³ WAMEX Annual Report, 1 April 2014 to 31 March 2015, Elizabeth Hill Silver Project, Global Strategic Metals NL, p16
⁴ www.kitco.com/charts/silver

This ASX announcement has been authorised for release by the Board of Directors of West Coast Silver Limited. For further information, please contact:

Bruce Garlick
Executive Director
West Coast Silver Limited
E: info@westcoastsilver.com.au

Competent Person Statement

The information in this announcement that relates to Exploration Results is based on information reviewed by Mr Max Nind who is a Member of the Australian Institute of Geoscientists. Mr Nind is a consultant to West Coast Silver and a full time employee of ERM Australia Consultants Pty Ltd.

Mr Nind has sufficient experience that is relevant to the style of mineralisation and type of deposits under consideration, and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the Joint Ore Reserves Committee (JORC) 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves', and a Specialist under the VALMIN Code 2015 Edition of the 'Australasian Code for Public Reporting of Technical Assessments and Valuations of Mineral Assets'. Mr Nind consents to the inclusion in the announcement of the matters based on this information and in the form and context in which it appears.

Forward-Looking Statements

Statements in this announcement which are not statements of historical facts, including but not limited to those relating to the proposed transaction, are forward-looking statements. These statements instead represent management's current expectations, estimates and projections regarding future events. Although management believes the expectations reflected in such forward-looking statements are reasonable, forward-looking statements are based on the opinions, assumptions and estimates of management at the date the statements are made and are subject to a variety of risks and uncertainties and other factors that could cause actual events or results to differ materially from those projected in the forward-looking statements.

Accordingly, investors are cautioned not to place undue reliance on such statements.

Cautionary Statement

This document is confidential and may not be reproduced, redistributed or passed on, directly or indirectly. This document is neither a prospectus nor an offer to subscribe for fully paid ordinary shares. West Coast Silver and its directors, employees and consultants make no representations or warranty as to the accuracy, reliability or completeness of this document, and have no liability, including liability to any person by reason of negligence of, or contained in or derived from, or for any omissions from this document, except liability under statute that cannot be excluded. This document contains reference to certain targets and plans of West Coast Silver which may or may not be achieved. The performance of West Coast Silver may be influenced by a number of factors, uncertainties and contingencies, many of which are outside the control of the Company and its directors, staff and consultants.

For personal use only

Appendix 1 – Elizabeth Hill Diamond Drill Collar Locations

Hole ID	Easting (m)	Northing (m)	RL (mASL)	Azi (°)	Dip (°)	EOH (m)
25WCDD005	486972	7667906	79	140	65	171.3
25WCDD006	487090	7667909	84	250	57	192.41
25WCDD007	487004	7667937	79	110	55	60.3
25WCDD008	487003	7667936	79	130	62	63.3
25WCDD009	487037	7667918	80	265	65	60.1
25WCDD010	487037	7667918	80	250	72	66.4

Note: Coordinate system is MGA 94 Zone 50

Appendix 2 – Elizabeth Hill Diamond Drill Assay Results

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Au (g/t)	Cu (%)	Pb (ppm)	Zn (ppm)
25WCDD005	13	14	1.00	0.19	0.01	0.00354	539	54
25WCDD005	14	15	1.00	0.25	0.01	0.0035	37.4	45
25WCDD005	15	16	1.00	0.61	0.01	0.00297	52.4	42
25WCDD005	16	17	1.00	1.01	0.01	0.00334	106	24
25WCDD005	17	18	1.00	1.32	0.01	0.00583	1605	29
25WCDD005	18	19	1.00	6.39	0.01	0.00623	10000*	59
25WCDD005	19	20	1.00	19.2	0.04	0.119	10000*	287
25WCDD005	20	21	1.00	7.01	0.03	0.0635	10000*	75
25WCDD005	21	22	1.00	3.75	0.01	0.0108	878	71
25WCDD005	22	23	1.00	3.49	0.01	0.00421	343	45
25WCDD005	23	24	1.00	2.2	ND	0.00592	1410	68
25WCDD005	24	25	1.00	1.92	0.01	0.00438	251	64
25WCDD005	35	36	1.00	0.71	0.01	0.00342	18.6	32
25WCDD005	36	37	1.00	2.92	0.01	0.00752	24.5	62
25WCDD005	37	38	1.00	4.23	ND	0.011	63.4	128
25WCDD005	38	39	1.00	2.73	ND	0.00731	80.1	91
25WCDD005	39	40	1.00	2.08	0.01	0.00721	74.4	62
25WCDD005	40	41	1.00	1.64	0.01	0.00497	73.5	35
25WCDD005	41	42	1.00	1.48	0.01	0.00209	101	41
25WCDD005	42	43	1.00	1.46	0.01	0.00256	58.5	69
25WCDD005	43	44	1.00	0.9	0.01	0.00148	46.8	34
25WCDD005	44	45	1.00	0.82	0.01	0.00255	1010	24
25WCDD005	45	46	1.00	0.53	0.01	0.00194	138	21
25WCDD005	46	47	1.00	0.26	ND	0.00135	17.6	38
25WCDD005	47	48	1.00	1.08	ND	0.00243	76.4	52
25WCDD005	48	49	1.00	1.35	0.01	0.00174	84.6	45
25WCDD005	49	50	1.00	0.56	ND	0.00317	62.8	33
25WCDD005	50	51	1.00	0.31	ND	0.00196	68	20
25WCDD005	51	52	1.00	0.31	ND	0.00171	22.4	12
25WCDD005	52	53	1.00	0.31	ND	0.00097	31	17

For personal use only

ASX:WCE ANNOUNCEMENT

24th September 2025

For personal use only

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Au (g/t)	Cu (%)	Pb (ppm)	Zn (ppm)
25WCDD005	53	54	1.00	0.23	0.01	0.00254	41.8	21
25WCDD005	54	55	1.00	0.54	ND	0.0117	226	385
25WCDD005	55	56	1.00	0.06	0.01	0.00096	25.1	64
25WCDD005	56	57	1.00	0.34	ND	0.00136	44.7	72
25WCDD005	57	58	1.00	0.25	ND	0.00252	48.6	67
25WCDD005	58	59	1.00	0.27	ND	0.00318	48.5	75
25WCDD005	59	60	1.00	1.11	0.01	0.00366	84.2	67
25WCDD005	60	61	1.00	0.18	0.01	0.00093	44.3	38
25WCDD005	61	62	1.00	0.11	ND	0.00087	25.9	47
25WCDD005	62	63	1.00	0.46	ND	0.00164	19.4	27
25WCDD005	63	64	1.00	0.7	ND	0.00311	74.6	40
25WCDD005	64	65	1.00	1.02	ND	0.00152	3490	38
25WCDD005	65	66	1.00	2.57	ND	0.00202	2940	48
25WCDD005	66	67	1.00	0.38	ND	0.00271	2600	31
25WCDD005	67	68	1.00	0.22	ND	0.00227	103.5	44
25WCDD005	68	69	1.00	0.06	ND	0.00179	51.1	55
25WCDD005	69	70	1.00	0.51	ND	0.00838	106	66
25WCDD005	70	71	1.00	0.16	0.01	0.00253	46.7	30
25WCDD005	71	72	1.00	0.1	ND	0.00075	66.1	14
25WCDD005	72	73	1.00	0.09	0.01	0.00068	66.9	15
25WCDD005	73	74	1.00	0.08	0.01	0.00031	74.1	13
25WCDD005	74	75	1.00	0.07	ND	0.00031	89.2	14
25WCDD005	75	76	1.00	0.09	ND	0.00025	96.6	16
25WCDD005	76	77	1.00	0.09	ND	0.00069	88.1	15
25WCDD005	77	78	1.00	0.06	ND	0.00028	61.9	12
25WCDD005	78	79	1.00	0.07	ND	0.00057	51.4	14
25WCDD005	79	80	1.00	0.07	ND	0.00023	42.4	12
25WCDD005	80	81	1.00	0.09	0.01	0.00024	35.6	8
25WCDD005	81	82	1.00	0.1	ND	0.00265	23.8	8
25WCDD005	82	83	1.00	0.12	0.01	0.00058	9.9	25
25WCDD005	83	84	1.00	0.09	ND	0.00044	17.3	23
25WCDD005	84	85	1.00	0.23	ND	0.00294	102	100
25WCDD005	85	86	1.00	0.13	ND	0.00265	100.5	84
25WCDD005	86	87	1.00	0.14	ND	0.0024	63	91
25WCDD005	87	88	1.00	0.1	0.01	0.00226	54.2	89
25WCDD005	88	89	1.00	0.05	ND	0.00085	39	45
25WCDD005	89	90	1.00	0.08	0.01	0.0019	24.9	45
25WCDD005	90	91	1.00	0.14	0.01	0.00177	24.3	44
25WCDD005	91	92	1.00	0.26	ND	0.00203	85.4	60
25WCDD005	92	93	1.00	0.32	ND	0.00234	129	46
25WCDD005	93	94	1.00	0.32	ND	0.00142	146.5	24
25WCDD005	101	102	1.00	0.17	ND	0.00273	35.8	47

ASX:WCE ANNOUNCEMENT

24th September 2025

For personal use only

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Au (g/t)	Cu (%)	Pb (ppm)	Zn (ppm)
25WCDD005	102	103	1.00	0.18	ND	0.00164	1645	12
25WCDD005	103	104	1.00	0.33	ND	0.00232	1715	40
25WCDD005	104	105	1.00	0.36	0.01	0.00276	93.8	23
25WCDD005	105	106	1.00	0.92	ND	0.0018	49.1	51
25WCDD005	111	112	1.00	0.42	ND	0.0008	108.5	30
25WCDD005	112	113	1.00	3.74	ND	0.00057	10000*	91
25WCDD005	113	114	1.00	0.18	ND	0.00116	139.5	42
25WCDD005	114	115	1.00	0.21	ND	0.00134	53.8	36
25WCDD005	115	116	1.00	0.38	ND	0.00339	110	42
25WCDD005	116	117	1.00	0.64	ND	0.00285	4890	28
25WCDD005	117	118	1.00	0.69	ND	0.00096	1720	29
25WCDD005	118	119	1.00	0.38	ND	0.00126	812	14
25WCDD005	119	120	1.00	0.55	ND	0.00068	2140	25
25WCDD005	120	121	1.00	0.3	ND	0.00097	306	14
25WCDD005	121	122	1.00	0.17	ND	0.0006	74	15
25WCDD005	122	123	1.00	0.14	ND	0.00052	46.3	18
25WCDD005	123	124	1.00	0.99	ND	0.00118	111.5	51
25WCDD005	124	125	1.00	0.33	0.01	0.00039	1065	14
25WCDD005	125	126	1.00	0.1	0.01	0.00034	87.6	18
25WCDD005	126	127	1.00	1.17	0.01	0.00081	2590	22
25WCDD005	127	128	1.00	0.73	0.01	0.00114	2810	13
25WCDD005	128	129	1.00	0.12	ND	0.00045	43.7	14
25WCDD005	129	130	1.00	0.11	ND	0.00086	36.1	16
25WCDD005	130	131	1.00	0.96	ND	0.0018	96.2	22
25WCDD005	131	132	1.00	0.87	ND	0.00156	137.5	21
25WCDD005	132	133	1.00	3.13	ND	0.00269	140	30
25WCDD005	133	134	1.00	0.64	ND	0.00056	32.7	10
25WCDD005	134	135	1.00	0.4	0.01	0.00168	39.1	8
25WCDD005	135	137	2.00	3.16	ND	0.00083	48.8	19
25WCDD005	137	138	1.00	5.23	ND	0.00134	170	16
25WCDD005	138	139	1.00	2.97	ND	0.00322	60.2	55
25WCDD005	139	140	1.00	3.62	0.01	0.0251	137	166
25WCDD005	140	141	1.00	2.3	ND	0.065	330	567
25WCDD005	141	142	1.00	2.7	ND	0.0609	336	472
25WCDD005	142	143	1.00	1.88	ND	0.0206	155	190
25WCDD005	143	144	1.00	2.03	ND	0.0185	44.4	203
25WCDD005	144	145	1.00	3.29	ND	0.0237	92	273
25WCDD005	145	146	1.00	1.23	ND	0.01425	25.4	220
25WCDD005	146	147	1.00	1.03	ND	0.01045	79.2	195
25WCDD005	147	148	1.00	0.41	0.01	0.00945	21.3	96
25WCDD005	148	149	1.00	0.5	ND	0.012	32.7	88
25WCDD005	149	150	1.00	0.5	ND	0.0118	5.2	82

ASX:WCE ANNOUNCEMENT

24th September 2025

For personal use only

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Au (g/t)	Cu (%)	Pb (ppm)	Zn (ppm)
25WCDD005	150	151	1.00	0.73	ND	0.0189	4.1	87
25WCDD005	151	152	1.00	0.35	ND	0.00723	4.2	80
25WCDD005	152	153	1.00	0.99	0.01	0.0205	6.7	81
25WCDD005	153	154	1.00	0.56	ND	0.01415	3.1	85
25WCDD005	154	155	1.00	0.38	ND	0.00826	7.5	75
25WCDD005	155	156	1.00	0.51	ND	0.0108	12.2	82
25WCDD005	156	157	1.00	0.51	ND	0.01135	9.5	81
25WCDD005	157	158	1.00	0.63	ND	0.01225	10.8	91
25WCDD005	158	159	1.00	1.15	ND	0.022	5.1	89
25WCDD005	159	160	1.00	0.43	ND	0.01595	12.2	89
25WCDD005	160	161	1.00	0.98	ND	0.01255	71.1	100
25WCDD005	161	162	1.00	2.37	0.01	0.0646	78.5	234
25WCDD005	162	163	1.00	1.38	ND	0.0323	124	96
25WCDD005	163	164	1.00	15.15	0.01	0.392	13.6	164
25WCDD005	164	165	1.00	1.61	ND	0.0457	25.3	96
25WCDD005	165	166	1.00	26.3	0.01	0.739	14.8	119
25WCDD005	166	167	1.00	3	0.01	0.0858	8.5	73
25WCDD005	167	168	1.00	3.95	ND	0.0772	13.2	88
25WCDD005	168	169	1.00	2.42	0.01	0.0569	18.6	98
25WCDD005	169	170	1.00	8.13	ND	0.1545	17.4	130
25WCDD005	170	171	1.00	14.05	ND	0.1705	203	407
25WCDD005	171	171.3	0.30	25.8	ND	0.173	171.5	138
25WCDD006	38.00	39.00	1.00	0.55	0.01	0.0513	297	92
25WCDD006	39.00	40.00	1.00	0.32	ND	0.0305	9.7	81
25WCDD006	40.00	41.00	1.00	0.16	ND	0.0114	6.5	81
25WCDD006	41.00	42.00	1.00	0.33	0.01	0.0378	4.6	98
25WCDD006	42.00	43.00	1.00	0.68	0.01	0.1355	7.1	85
25WCDD006	43.00	44.00	1.00	1.33	0.02	0.3410	9.7	94
25WCDD006	44.00	45.00	1.00	0.96	0.02	0.1825	15	71
25WCDD006	45.00	46.00	1.00	0.47	0.01	0.1260	13.8	57
25WCDD006	46.00	47.00	1.00	0.5	0.01	0.1255	21.7	70
25WCDD006	47.00	48.00	1.00	0.81	0.02	0.1320	21.3	76
25WCDD006	48.00	49.00	1.00	0.08	ND	0.0060	19.6	32
25WCDD006	49.00	50.00	1.00	0.05	ND	0.0026	8.8	32
25WCDD006	50.00	51.00	1.00	0.05	ND	0.0030	12	42
25WCDD006	51.00	52.00	1.00	0.03	ND	0.0005	44.9	9
25WCDD006	64.00	65.00	1.00	0.14	ND	0.0125	9.2	49
25WCDD006	65.00	65.50	0.50	1.51	ND	0.1700	28.3	44
25WCDD006	65.50	66.00	0.50	0.04	ND	0.0018	10	39
25WCDD006	91.00	92.00	1.00	0.02	ND	0.0007	15.4	40
25WCDD006	92.00	93.00	1.00	0.05	ND	0.0030	24.5	47
25WCDD006	93.00	94.00	1.00	0.15	0.01	0.0138	27.4	98

ASX:WCE ANNOUNCEMENT

24th September 2025

For personal use only

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Au (g/t)	Cu (%)	Pb (ppm)	Zn (ppm)
25WCDD006	94.00	95.00	1.00	0.85	0.01	0.0310	967	673
25WCDD006	95.00	95.50	0.50	8.61	0.01	0.1650	10000*	3450
25WCDD006	95.50	96.00	0.50	0.08	0.01	0.0017	75.7	53
25WCDD006	96.00	97.00	1.00	0.1	0.01	0.0033	12.7	27
25WCDD006	97.00	98.00	1.00	0.19	ND	0.0033	19.4	27
25WCDD006	98.00	99.00	1.00	0.28	ND	0.0047	99.5	80
25WCDD006	99.00	100.00	1.00	0.25	0.01	0.0044	16.6	72
25WCDD006	100.00	101.00	1.00	9.95	ND	0.0025	56.4	76
25WCDD006	101.00	102.00	1.00	2.06	0.01	0.0019	30.5	79
25WCDD006	102.00	103.00	1.00	0.36	ND	0.0023	14.8	91
25WCDD006	103.00	104.00	1.00	0.71	ND	0.0011	16	50
25WCDD006	104.00	105.00	1.00	0.07	0.01	0.0008	16.2	43
25WCDD006	105.00	106.00	1.00	0.15	ND	0.0026	14	47
25WCDD006	106.00	107.00	1.00	0.31	0.01	0.0016	60.6	84
25WCDD006	107.00	108.00	1.00	0.36	ND	0.0016	15.8	72
25WCDD006	108.00	109.00	1.00	1.07	0.01	0.0014	12.8	80
25WCDD006	109.00	109.50	0.50	0.87	ND	0.0010	35.4	176
25WCDD006	109.50	110.50	1.00	5.04	0.01	0.0004	240	176
25WCDD006	110.50	111.50	1.00	0.81	0.01	0.0022	33.5	78
25WCDD006	111.50	112.50	1.00	0.97	0.01	0.0018	238	69
25WCDD006	112.50	113.00	0.50	0.11	0.01	0.0010	48.5	55
25WCDD006	124.00	125.00	1.00	1.02	ND	0.0004	374	37
25WCDD006	136.00	137.00	1.00	0.3	0.01	0.0022	20.5	47
25WCDD006	137.00	138.00	1.00	0.28	ND	0.0034	13.3	45
25WCDD006	138.00	139.00	1.00	1.61	ND	0.0070	151.5	164
25WCDD006	139.00	140.00	1.00	4.52	0.01	0.0085	161	163
25WCDD006	140.00	141.00	1.00	0.86	0.01	0.0008	200	42
25WCDD006	141.00	142.00	1.00	0.16	ND	0.0007	31.5	28
25WCDD006	142.00	143.00	1.00	0.2	ND	0.0010	47.3	31
25WCDD006	143.00	144.00	1.00	0.18	ND	0.0014	28.5	17
25WCDD006	144.00	145.00	1.00	0.28	0.01	0.0023	30.8	23
25WCDD006	145.00	146.00	1.00	0.24	0.01	0.0018	34	76
25WCDD006	146.00	147.00	1.00	0.19	0.01	0.0006	180	40
25WCDD006	147.00	148.00	1.00	1.29	0.01	0.0014	35.1	30
25WCDD006	148.00	149.00	1.00	1.38	ND	0.0006	10.6	65
25WCDD006	149.00	150.00	1.00	0.6	0.01	0.0019	26.1	18
25WCDD006	150.00	151.00	1.00	0.17	ND	0.0008	36.6	30
25WCDD006	151.00	152.00	1.00	0.37	0.01	0.0005	32.7	26
25WCDD006	152.00	153.00	1.00	0.27	ND	0.0005	34	24
25WCDD006	153.00	154.00	1.00	1.05	0.01	0.0008	18.4	19
25WCDD006	154.00	155.00	1.00	0.12	0.01	0.0010	14.2	43
25WCDD006	155.00	156.00	1.00	0.12	ND	0.0012	14.2	96

ASX:WCE ANNOUNCEMENT

24th September 2025

For personal use only

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Au (g/t)	Cu (%)	Pb (ppm)	Zn (ppm)
25WCDD006	156.00	157.00	1.00	0.25	ND	0.0019	17	34
25WCDD006	157.00	158.00	1.00	0.32	ND	0.0011	15.6	45
25WCDD006	158.00	159.00	1.00	0.1	ND	0.0008	26.4	51
25WCDD006	159.00	160.00	1.00	0.23	0.01	0.0007	49.9	44
25WCDD006	160.00	161.00	1.00	0.66	ND	0.0011	80.3	21
25WCDD006	161.00	162.00	1.00	0.92	0.01	0.0013	69.3	21
25WCDD006	162.00	163.00	1.00	0.17	0.01	0.0012	59.3	25
25WCDD006	163.00	164.00	1.00	0.09	ND	0.0007	27.7	21
25WCDD006	164.00	165.00	1.00	0.16	ND	0.0020	29.6	38
25WCDD006	165.00	166.00	1.00	0.18	0.01	0.0031	35.6	66
25WCDD006	166.00	167.00	1.00	0.11	0.01	0.0009	36.5	54
25WCDD006	167.00	168.00	1.00	0.1	0.01	0.0010	29.7	70
25WCDD006	168.00	169.00	1.00	0.11	0.01	0.0016	44.5	88
25WCDD006	169.00	170.00	1.00	0.17	0.02	0.0012	89.5	80
25WCDD006	170.00	171.00	1.00	0.16	0.01	0.0008	50.1	44
25WCDD006	171.00	172.00	1.00	0.7	0.01	0.0011	211	78
25WCDD006	172.00	173.00	1.00	0.33	0.01	0.0009	35	32
25WCDD006	173.00	173.50	0.50	1.3	ND	0.0029	53.3	150
25WCDD006	173.50	174.00	0.50	2.67	0.01	0.0009	33.1	67
25WCDD006	174.00	174.50	0.50	1.3	0.02	0.0015	99	124
25WCDD006	174.50	175.00	0.50	0.64	0.01	0.0018	151	167
25WCDD006	175.00	176.00	1.00	0.73	ND	0.0093	73.1	110
25WCDD006	176.00	177.00	1.00	0.74	ND	0.0009	95.4	179
25WCDD006	177.00	178.00	1.00	0.32	ND	0.0042	156	726
25WCDD006	178.00	179.00	1.00	2.4	0.01	0.0605	276	528
25WCDD006	179.00	180.00	1.00	1.73	ND	0.0029	134	293
25WCDD006	180.00	181.00	1.00	2.05	ND	0.0020	27.7	81
25WCDD006	190.00	191.00	1.00	0.12	ND	0.0014	26.8	33
25WCDD006	191.00	192.00	1.00	0.14	ND	0.0014	31.9	42
25WCDD006	192.00	192.40	0.40	0.17	ND	0.0010	33.8	40
25WCDD007	0.00	1.00	1.00	20.4	0.01	0.0303	381	238
25WCDD007	1.00	2.00	1.00	24.8	0.01	0.0041	157.5	45
25WCDD007	2.00	3.00	1.00	20.5	0.01	0.0014	144	54
25WCDD007	3.00	4.00	1.00	16.15	0.01	0.0016	92.1	62
25WCDD007	4.00	5.00	1.00	22.5	0.01	0.0040	166	95
25WCDD007	5.00	6.00	1.00	20.7	0.02	0.0029	88.4	95
25WCDD007	6.00	7.00	1.00	18	0.01	0.0025	119	123
25WCDD007	7.00	8.00	1.00	18.9	0.01	0.0026	104	119
25WCDD007	8.00	9.00	1.00	12.3	0.01	0.0017	68.3	70
25WCDD007	9.00	10.00	1.00	20	0.01	0.0021	63.8	77
25WCDD007	10.00	11.00	1.00	15.45	0.01	0.0025	118.5	45
25WCDD007	11.00	12.00	1.00	16.4	0.01	0.0047	259	61

ASX:WCE ANNOUNCEMENT

24th September 2025

For personal use only

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Au (g/t)	Cu (%)	Pb (ppm)	Zn (ppm)
25WCDD007	12.00	13.00	1.00	15.1	0.01	0.0101	451	93
25WCDD007	13.00	14.00	1.00	17.8	0.01	0.0277	1475	338
25WCDD007	14.00	15.00	1.00	21.6	0.01	0.0059	642	212
25WCDD007	15.00	16.00	1.00	30.1	0.01	0.0086	963	436
25WCDD007	16.00	17.00	1.00	27.3	0.01	0.0175	2710	639
25WCDD007	17.00	18.00	1.00	23.6	0.01	0.0277	1485	438
25WCDD007	18.00	19.00	1.00	74.8	0.02	0.0500	2850	758
25WCDD007	19.00	20.00	1.00	31.6	0.01	0.1660	8610	3510
25WCDD007	20.00	21.00	1.00	12.85	0.01	0.0845	4830	1875
25WCDD007	21.00	22.00	1.00	14.35	0.01	0.0689	1945	2050
25WCDD007	22.00	23.00	1.00	61.3	0.01	0.1015	4710	2990
25WCDD007	23.00	24.00	1.00	61.3	0.02	0.1565	5450	4170
25WCDD007	24.00	25.00	1.00	121	0.01	0.0807	6870	3610
25WCDD007	25.00	26.00	1.00	18.6	0.01	0.0559	7750	1280
25WCDD007	26.00	27.00	1.00	27.5	0.01	0.0658	2720	1055
25WCDD007	27.00	28.00	1.00	6.4	0.01	0.0774	2040	1495
25WCDD007	28.00	29.00	1.00	5.75	0.03	0.1125	3360	2240
25WCDD007	29.00	30.00	1.00	4.26	0.01	0.1095	1875	1285
25WCDD007	30.00	31.00	1.00	121	0.01	0.0559	106	212
25WCDD007	31.00	32.00	1.00	23.4	0.01	0.0233	21.1	96
25WCDD007	32.00	33.00	1.00	11.7	0.01	0.0349	90.5	230
25WCDD007	33.00	34.00	1.00	15.25	0.01	0.0254	46.8	130
25WCDD007	34.00	35.00	1.00	10.95	0.01	0.0396	19	75
25WCDD007	35.00	36.00	1.00	10.35	0.01	0.0405	79.8	244
25WCDD007	36.00	37.00	1.00	11.85	0.01	0.0422	123.5	405
25WCDD007	37.00	38.00	1.00	7.8	0.01	0.0376	619	266
25WCDD007	38.00	39.00	1.00	7.19	0.01	0.0835	176.5	578
25WCDD007	39.00	40.00	1.00	4.38	0.01	0.0503	59.1	133
25WCDD007	40.00	41.00	1.00	7.97	0.01	0.0921	40.9	118
25WCDD007	41.00	42.00	1.00	3.07	0.01	0.0318	18.8	127
25WCDD007	42.00	43.00	1.00	5.42	ND	0.0520	64.2	162
25WCDD007	43.00	44.00	1.00	9.71	0.01	0.0481	70.5	318
25WCDD007	44.00	45.00	1.00	5.12	0.01	0.0515	909	309
25WCDD007	45.00	46.00	1.00	4.31	0.01	0.0689	251	257
25WCDD007	46.00	47.00	1.00	3.78	0.01	0.0553	29.5	88
25WCDD007	47.00	48.00	1.00	5.23	0.01	0.0531	178.5	300
25WCDD007	48.00	49.00	1.00	4.47	0.01	0.0417	325	220
25WCDD007	49.00	50.00	1.00	1.88	0.01	0.0474	157.5	168
25WCDD007	50.00	51.00	1.00	2.47	0.01	0.0460	176	219
25WCDD007	51.00	52.00	1.00	1.59	ND	0.0095	4620	73
25WCDD007	52.00	53.00	1.00	1.09	ND	0.0020	46.6	24
25WCDD007	53.00	54.00	1.00	3.28	ND	0.0042	34.1	64

ASX:WCE ANNOUNCEMENT

24th September 2025

For personal use only

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Au (g/t)	Cu (%)	Pb (ppm)	Zn (ppm)
25WCDD007	54.00	55.00	1.00	2.46	ND	0.0020	23.1	43
25WCDD007	55.00	56.00	1.00	0.82	ND	0.0014	34.1	36
25WCDD007	56.00	57.00	1.00	0.12	ND	0.0011	8.4	30
25WCDD007	57.00	58.00	1.00	0.08	ND	0.0011	18.3	41
25WCDD007	58.00	59.00	1.00	0.05	0.03	0.0012	11.8	40
25WCDD007	59.00	60.00	1.00	0.12	ND	0.0011	605	42
25WCDD007	60.00	60.30	0.30	0.05	ND	0.0011	5.4	71
25WCDD008	0.00	1.00	1.00	19.1	ND	0.0119	185	104
25WCDD008	1.00	2.00	1.00	16.25	ND	0.0038	92.6	70
25WCDD008	2.00	3.00	1.00	18.8	ND	0.0033	161	62
25WCDD008	3.00	4.00	1.00	21.9	ND	0.0029	190	61
25WCDD008	4.00	5.00	1.00	19.6	ND	0.0025	342	66
25WCDD008	5.00	6.00	1.00	16.6	ND	0.0020	109.5	64
25WCDD008	6.00	7.00	1.00	18.85	0.01	0.0033	99.6	109
25WCDD008	7.00	8.00	1.00	16.4	ND	0.0026	232	78
25WCDD008	8.00	9.00	1.00	18.3	ND	0.0021	132.5	84
25WCDD008	9.00	10.00	1.00	19	ND	0.0021	77.9	74
25WCDD008	10.00	11.00	1.00	19.15	ND	0.0046	175.5	60
25WCDD008	11.00	12.00	1.00	21.6	ND	0.0024	75.7	73
25WCDD008	12.00	13.00	1.00	19.4	ND	0.0033	158.5	56
25WCDD008	13.00	14.00	1.00	17.75	ND	0.0043	104.5	151
25WCDD008	14.00	15.00	1.00	19.65	ND	0.0089	362	212
25WCDD008	15.00	16.00	1.00	19.75	ND	0.0062	251	163
25WCDD008	16.00	17.00	1.00	15.55	ND	0.0039	163.5	107
25WCDD008	17.00	18.00	1.00	19.05	ND	0.0032	101.5	65
25WCDD008	18.00	19.00	1.00	15.05	ND	0.0058	232	158
25WCDD008	19.00	20.00	1.00	16.6	0.01	0.0065	377	162
25WCDD008	20.00	21.00	1.00	28.9	0.01	0.0105	565	224
25WCDD008	21.00	22.00	1.00	27.3	0.01	0.0108	429	252
25WCDD008	22.00	23.00	1.00	31.8	0.01	0.0138	533	204
25WCDD008	23.00	24.00	1.00	29.9	0.01	0.0037	120	24
25WCDD008	24.00	25.00	1.00	30.8	0.01	0.0138	495	76
25WCDD008	25.00	27.00	2.00	35.3	0.01	0.0116	461	96
25WCDD008	27.00	28.00	1.00	35.4	0.01	0.0022	68.2	37
25WCDD008	28.00	29.00	1.00	44.7	ND	0.0027	28.9	64
25WCDD008	29.00	30.00	1.00	42.3	0.01	0.0023	69.5	35
25WCDD008	30.00	31.00	1.00	29.6	0.01	0.0074	642	31
25WCDD008	31.00	33.00	2.00	27.6	0.01	0.0039	159.5	29
25WCDD008	33.00	34.20	1.20	242	0.02	0.0860	10000*	4480
25WCDD008	34.20	35.00	0.80	43	0.01	0.1445	10000*	898
25WCDD008	35.00	36.20	1.20	46	0.03	0.3850	7100	1170
25WCDD008	36.20	37.00	0.80	39.5	0.03	0.2170	10000*	1305

ASX:WCE ANNOUNCEMENT

24th September 2025

For personal use only

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Au (g/t)	Cu (%)	Pb (ppm)	Zn (ppm)
25WCDD008	37.00	38.00	1.00	29	0.39	0.0902	4090	1375
25WCDD008	38.00	39.00	1.00	24.6	0.02	0.1610	3630	1745
25WCDD008	39.00	39.50	0.50	175	0.02	0.0002	10000*	3380
25WCDD008	39.50	40.00	0.50	67.3	0.01	0.2410	3850	1350
25WCDD008	40.00	41.00	1.00	44.3	0.01	0.3220	1050	648
25WCDD008	41.00	42.00	1.00	4.65	0.01	0.0643	336	239
25WCDD008	42.00	43.00	1.00	6.03	0.01	0.0657	452	300
25WCDD008	43.00	44.00	1.00	8.71	0.01	0.0858	791	455
25WCDD008	44.00	45.00	1.00	138	0.01	0.0667	136.5	327
25WCDD008	45.00	46.15	1.15	905	0.01	0.1715	537	576
25WCDD008	46.15	46.40	0.25	1475	ND	0.2530	161.5	662
25WCDD008	46.40	47.00	0.60	42.9	0.01	0.1150	95.8	436
25WCDD008	47.00	48.00	1.00	40.5	0.01	0.0994	142	461
25WCDD008	48.00	49.00	1.00	164	0.01	0.0658	83.1	256
25WCDD008	49.00	50.00	1.00	121	ND	0.0347	76.8	150
25WCDD008	50.00	51.00	1.00	16.4	0.01	0.0285	102	297
25WCDD008	51.00	52.00	1.00	11.4	ND	0.0635	158	325
25WCDD008	52.00	53.00	1.00	6.71	ND	0.0351	168.5	229
25WCDD008	53.00	54.00	1.00	9.26	ND	0.0244	216	426
25WCDD008	54.00	55.00	1.00	4.83	ND	0.0465	306	291
25WCDD008	55.00	56.00	1.00	7.2	ND	0.0685	1175	770
25WCDD008	56.00	57.00	1.00	5.79	0.01	0.0055	1700	1150
25WCDD008	57.00	58.00	1.00	34.1	ND	0.0630	1625	488
25WCDD008	58.00	59.00	1.00	76.2	0.01	0.0583	114.5	132
25WCDD008	59.00	60.00	1.00	15.9	ND	0.0387	83.5	218
25WCDD008	60.00	61.00	1.00	7.88	ND	0.0282	62.2	163
25WCDD008	61.00	62.00	1.00	8.63	ND	0.0456	139	332
25WCDD008	62.00	63.15	1.15	3.43	ND	0.0256	38.8	197
25WCDD009	7.00	8.00	1.00	4.78	ND	0.1075	3	83
25WCDD009	8.00	9.00	1.00	3.37	0.01	0.0641	2.5	79
25WCDD009	9.00	10.00	1.00	3.2	ND	0.0452	33.9	79
25WCDD009	19.00	20.00	1.00	23.7	ND	0.2010	161.5	173
25WCDD009	20.00	21.00	1.00	18.3	ND	0.1550	4.4	93
25WCDD009	21.00	22.00	1.00	22.2	0.01	0.1880	9.4	110
25WCDD009	22.00	23.00	1.00	25.3	ND	0.2180	168.5	194
25WCDD009	23.00	24.00	1.00	13.5	0.01	0.1105	14.1	88
25WCDD009	24.00	25.00	1.00	14.55	0.01	0.1300	4.8	89
25WCDD009	25.00	26.00	1.00	7.18	0.01	0.0612	3.7	85
25WCDD009	26.00	27.00	1.00	19.15	0.01	0.1600	8.2	88
25WCDD009	27.00	28.00	1.00	12.2	ND	0.0894	8.4	67
25WCDD009	28.00	29.00	1.00	13.95	0.01	0.1030	3.2	63
25WCDD009	29.00	30.00	1.00	13.65	0.01	0.0972	2.4	69

ASX:WCE ANNOUNCEMENT

24th September 2025

For personal use only

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Au (g/t)	Cu (%)	Pb (ppm)	Zn (ppm)
25WCDD009	30.00	31.00	1.00	12.95	ND	0.0785	2.8	64
25WCDD009	31.00	32.00	1.00	12.85	ND	0.0887	2	69
25WCDD009	32.00	33.00	1.00	3.59	ND	0.0299	2.6	93
25WCDD009	33.00	34.00	1.00	13.9	ND	0.0943	4.8	321
25WCDD009	34.00	35.00	1.00	7.15	ND	0.0410	9.1	159
25WCDD009	35.00	36.00	1.00	10.45	ND	0.0757	63.1	265
25WCDD009	36.00	37.00	1.00	59.9	ND	0.0379	36.8	244
25WCDD009	37.00	38.00	1.00	6.31	0.01	0.0728	40.6	537
25WCDD009	38.00	38.75	0.75	19.1	0.01	0.0853	131.5	819
25WCDD009	38.75	39.25	0.50	4.3	0.01	0.0527	81.7	529
25WCDD009	39.25	39.75	0.50	104	0.02	0.0921	1940	2670
25WCDD009	39.75	40.50	0.75	0.86	0.02	0.0390	57.4	322
25WCDD009	40.50	41.00	0.50	7.27	0.02	0.0438	105	386
25WCDD009	41.00	42.00	1.00	4.4	0.01	0.0452	1365	993
25WCDD009	42.00	44.00	2.00	12.8	0.01	0.0434	4190	979
25WCDD009	44.00	45.00	1.00	2.32	ND	0.1930	5020	1795
25WCDD009	45.00	45.90	0.90	89	0.12	0.3090	3890	860
25WCDD009	45.90	47.05	1.15	99.6	0.01	0.6310	1165	948
25WCDD009	47.05	48.00	0.95	27.1	0.02	0.0268	776	193
25WCDD009	48.00	49.00	1.00	43	0.01	0.0055	641	80
25WCDD009	49.00	50.00	1.00	14	ND	0.0080	920	103
25WCDD009	50.00	50.70	0.70	6.54	0.01	0.0036	988	259
25WCDD009	52.30	53.00	0.70	16.2	0.01	0.0021	53.9	37
25WCDD009	53.00	54.00	1.00	21.7	ND	0.0017	94.7	66
25WCDD009	54.00	55.00	1.00	11.35	0.01	0.0014	150	144
25WCDD009	55.00	56.00	1.00	4.43	0.01	0.0015	67.1	50
25WCDD009	56.00	57.00	1.00	2.48	ND	0.0021	34.1	51
25WCDD009	57.00	58.00	1.00	1.66	ND	0.0030	40.9	43
25WCDD009	58.00	59.00	1.00	2.04	ND	0.0026	34.9	39
25WCDD009	59.00	60.10	1.10	1.39	0.01	0.0025	47.6	30
25WCDD010	7.00	8.00	1.00	1.32	ND	0.0334	5.7	70
25WCDD010	8.00	9.00	1.00	1.97	ND	0.0303	6.7	83
25WCDD010	9.00	10.00	1.00	4.28	0.01	0.1010	6.1	82
25WCDD010	10.00	11.00	1.00	2.12	0.01	0.0463	3	66
25WCDD010	11.00	12.00	1.00	3.9	ND	0.0752	51.1	83
25WCDD010	20.00	21.00	1.00	3.3	ND	0.0517	4.4	78
25WCDD010	21.00	22.00	1.00	6.83	0.01	0.0769	12.8	86
25WCDD010	22.00	23.00	1.00	7.42	0.01	0.0840	5.8	86
25WCDD010	23.00	24.00	1.00	7.06	0.01	0.0699	9.6	88
25WCDD010	24.00	25.00	1.00	24.7	0.01	0.2660	83.3	287
25WCDD010	25.00	26.00	1.00	13	0.01	0.1285	72.6	104
25WCDD010	26.00	27.00	1.00	9.5	0.01	0.1090	17.4	97

ASX:WCE ANNOUNCEMENT

24th September 2025

For personal use only

Hole ID	From (m)	To (m)	Interval (m)	Ag (g/t)	Au (g/t)	Cu (%)	Pb (ppm)	Zn (ppm)
25WCDD010	27.00	28.00	1.00	6.36	0.01	0.0621	5	70
25WCDD010	28.00	29.00	1.00	9.9	0.01	0.1050	10.3	77
25WCDD010	29.00	30.00	1.00	9.54	0.01	0.0962	16.4	75
25WCDD010	30.00	31.00	1.00	4.27	0.01	0.0435	1.7	60
25WCDD010	31.00	32.00	1.00	7.41	0.01	0.0673	34.6	80
25WCDD010	32.00	33.00	1.00	9.44	0.01	0.1165	67.9	101
25WCDD010	33.00	34.00	1.00	3.03	0.01	0.0216	1.8	62
25WCDD010	34.00	35.00	1.00	6.31	ND	0.0575	4.6	58
25WCDD010	35.00	36.00	1.00	11.3	ND	0.0574	1.6	57
25WCDD010	36.00	37.00	1.00	4.97	ND	0.0543	1.7	59
25WCDD010	37.00	38.00	1.00	6.3	ND	0.0636	4.8	62
25WCDD010	38.00	39.00	1.00	4.32	ND	0.0280	2.3	59
25WCDD010	39.00	40.00	1.00	4.78	0.01	0.0410	12.6	62
25WCDD010	40.00	41.00	1.00	2.45	0.01	0.0276	26.9	67
25WCDD010	41.00	42.00	1.00	6.77	0.01	0.0478	17.4	65
25WCDD010	42.00	43.00	1.00	5.8	0.01	0.0545	26.7	159
25WCDD010	43.00	44.00	1.00	13.6	0.01	0.0787	52.6	419
25WCDD010	44.00	45.00	1.00	12.55	0.01	0.0814	79.5	172
25WCDD010	45.00	46.00	1.00	14.7	0.01	0.0793	95.9	190
25WCDD010	48.00	49.00	1.00	22.3	0.01	0.1115	67.3	402
25WCDD010	49.00	50.00	1.00	12.65	0.01	0.0178	12.8	88
25WCDD010	50.00	51.00	1.00	20.4	0.01	0.0596	36.2	118
25WCDD010	51.00	52.00	1.00	5.26	0.01	0.0184	53.7	199
25WCDD010	52.00	53.00	1.00	4.8	0.01	0.0330	38.5	270
25WCDD010	53.00	54.00	1.00	5.22	0.01	0.0204	36.3	119
25WCDD010	54.00	54.70	0.70	17.55	0.01	0.0302	59.5	149
25WCDD010	54.70	56.20	1.50	11.75	0.01	0.1675	4390	5670
25WCDD010	56.20	57.00	0.80	4.91	0.02	0.0709	1005	958
25WCDD010	57.00	58.00	1.00	2.36	0.01	0.1310	135.5	1235
25WCDD010	58.00	59.00	1.00	12.35	0.03	0.1330	124	437
25WCDD010	59.00	60.00	1.00	8.78	0.01	0.0301	111.5	160
25WCDD010	60.00	61.00	1.00	16.25	0.01	0.0769	82.8	218
25WCDD010	61.00	62.00	1.00	19.8	0.01	0.0711	27.8	103
25WCDD010	62.00	63.00	1.00	6.82	0.01	0.0208	1685	165
25WCDD010	63.00	64.00	1.00	29.9	0.01	0.0752	95.2	215
25WCDD010	64.00	65.00	1.00	144	0.01	0.0721	17.2	79
25WCDD010	65.00	66.40	1.40	408	0.01	0.0469	9.8	95

Notes: ND = not detected; * Above the upper detection limit of 10,000ppm

Appendix 3

JORC Code (2012) – Table 1 - Inaugural Diamond Drill Program, Elizabeth Hill Silver Project

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> The historical exploration activities mentioned in this release have been obtained from open file data (WAMEX reports) extracted by Alien Metals, and other historical databases that Alien Metals has used to compile a master database. The Competent Person (CP) confirms that sufficient spot checks of data in the Alien Metals master database, for selected historical drill holes, have been performed with the original WAMEX reports to verify the data extracted or captured in digital format, is as presented. The CP considers the data is fit for purpose for planning further exploration. Data including procedure documentation have been obtained from Alien Metals. West Coast Silver is undertaking a full validation of the nature and quality of the historical drill sampling undertaken. West Coast Silver has however done sufficient verification of the sampling techniques, and in the CP's opinion it provides sufficient confidence that sampling was performed to adequate industry standards and is fit for the purpose of planning exploration programmes and generating targets for investigation. All references to mineralisation are taken from reports and documents prepared by previous explorers that have been reviewed by West Coast Silver and considered to be fit for purpose. The CP concluded that results highlighted by West Coast Silver are anomalous and warrant further investigation, based on his experience in

Criteria	JORC Code explanation	Commentary
		<p>the areas of the Company project.</p> <p>Drilling:</p> <p><i>West Coast Silver Drilling</i></p> <ul style="list-style-type: none"> Samples for laboratory analyses were taken by sawing the DD core in half along a cutting line, which is offset from the core orientation line. The half of the drill core, sample length of typically 1m, without the orientation line is collected for assaying. Duplicate samples were collected by sawing the remaining half core into two quarter cores, taking a quarter core but preserving the quarter core with the orientation line on it. Original and QAQC samples (CRM standards, blanks and core duplicates) were sent to the laboratory for analysis (ALS Perth for all elements and secondary assaying at ALS Langley Canada for any over grade Ag assays). Entire DD samples were crushed (CRU-21) then fine crushed (CRU-31) to 70% passing 2mm. The sample was then split with a Boyd Rotary Splitter (SPL-22Y) and a 250g split sample was subsequently pulverised (method PUL-25a) to 85% passing 75 µm. These preparation methods are standard and appropriate for the samples. <p><i>Alien Metals Drilling</i></p> <ul style="list-style-type: none"> Industry standard sampling techniques have been applied at the Project. RC drilling was used to obtain 1m samples. A cone, or occasionally a riffle splitter, was used to obtain a representative 2.5kg – 3.5kg sample into a uniquely pre-numbered calico bag and placed on the ground next to the remainder of the 1m sample. The samples were placed in order on the ground in ordered rows. When water was produced by the hole, samples were continued to be taken with care to get as representative a sample per metre as possible. Water was expelled after rod change to reduce the amount of water in

Criteria	JORC Code explanation	Commentary
		<p>the ensuing samples. All efforts were made to ensure representative samples in wet conditions were taken. Notes were made on logging sheets for large volumes of water to ensure interpretation was consistent in the holes. The CP is unable to verify whether any contamination was recorded in the drill logs.</p> <ul style="list-style-type: none"> For some RC drilling intervals, sampling was completed using 2m or 4m composite sample intervals. When compositing, a uniquely numbered calico bag was used and the sample was collected by using a scoop through the sample pile to ensure the sample was as representative as possible. DD was used in some drill holes. DD samples were cut half core samples which were sampled under geological supervision to geological contacts, or up to 1m intervals. The samples, along with QAQC samples, were transferred from the field or the secure core processing facility by Company staff to a secure yard for transport via freight contractors who delivered the samples and obtained chain of custody documentation to the nominated laboratory. Certified Reference Materials (CRM) (standards) and blanks were inserted approximately every 25 samples. Additionally, RC field duplicates were also completed for nominated intervals, approximately 1 in 50 samples. RC samples were oven dried, reduced by riffle splitting to 3kg as required and pulverised in a single stage process to 85% passing 75 µm. After assaying, approximately 200g of pulp material was returned to Alien Metals for storage and potential re-assay at a later date. DD samples were oven dried, crushed to a nominal 10mm by a jaw crusher, reduced by riffle splitting to 3kg, as required, and pulverised in a single stage process to 85% passing 75 µm. After assaying, approximately 200g of pulp material was returned to Alien Metals for

Criteria	JORC Code explanation	Commentary
		<p>storage and potential re-assay at a later date.</p> <ul style="list-style-type: none"> Samples were analysed by Bureau Veritas in Perth. <p><i>Pre-2021 Historical Drilling</i></p> <ul style="list-style-type: none"> Early-stage exploration work comprised rotary air blast (RAB), reverse circulation (RC) percussion and diamond (core) drilling (DD). Sampling is not always documented in the historic reports. However, sampling has been described for drilling by East Coast Minerals NL and Legend Mining Ltd in the early 2000's. Single metre RC drill samples were collected where mineralisation was expected. RC drill composite samples for this drilling were riffle split from 1m drill spoils and then spear sampled as 2, 3 or 4m composites. Laboratory protocols are not available to determine the laboratory sample size.
Drilling techniques	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<p><i>West Coast Silver Drilling</i></p> <ul style="list-style-type: none"> Drilling was undertaken with a track-mounted LF90Ds with operational dip angles of -90° to -30° and capable of drilling HQ core to 600m. Core was recovered in a standard tube. All the core in this program was drilled HQ. Core was orientated using a Reflex ACT III HQ tool. Drill holes collar azimuths were surveyed using an IMDEX TN14 Gyro and Compass and down hole surveys were collected using a Reflex Omni X-42 tool. <p><i>Alien Metals Drilling</i></p> <ul style="list-style-type: none"> For RC drilling, an industry standard face sampling type RC hammer and drill bit was used, with chip samples returned within the drill pipe and recovered through a cyclone. Holes were drilled at various azimuths and

Criteria	JORC Code explanation	Commentary
		<p>dips to varying depths. Hole diameter is a nominal 133mm.</p> <ul style="list-style-type: none"> Diamond drilling was completed by utilisation of a top drive diamond core drilling rig which used an industry standard core barrel and wireline set up. Core was orientated, when possible, on 3m runs. Core was NQ in size (~47.6mm diameter). <p><i>Pre-2021 Historical Drilling</i></p> <ul style="list-style-type: none"> Drilling methods included RAB, RC percussion and diamond drilling. At this time, hole diameters and detailed information regarding drilling has not been compiled and are not considered material to supporting the assessment of prospectivity and further regional exploration.
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<p><i>West Coast Silver Drilling</i></p> <ul style="list-style-type: none"> Core recovery was systematically recorded from the commencement of diamond coring to the end of hole; by reconciling against driller depth blocks, production plods and knowledge obtained from visual inspection. Core recoveries typically averaged above 90% with isolated minor zones of lesser recovery. No relationship has been established between core recovery and grade. There is no reason to expect any sampling bias. Detailed core recovery data is maintained throughout the program as part of the geotechnical logging. <p><i>Alien Metals Drilling</i></p> <ul style="list-style-type: none"> The geologist visually assessed RC drill sample recoveries during the program for each metre and these were overall very good. Intervals of poor recovery are noted on the log sheet. Drill cyclone was cleaned after each 6m run during the drilling of the hole

Criteria	JORC Code explanation	Commentary
		<p>and also between holes to minimise down hole or cross-hole contamination.</p> <ul style="list-style-type: none"> Some drill intervals were wet, and these intervals were collected into plastic bags. For DD, the core recovery is noted for each interval on the log sheet. All drillers, at all times, are directed that quality and recovery of sample are of utmost importance. No relationship between sample recovery and grade has been recognised. <p><i>Pre-2021 Historical Drilling</i></p> <ul style="list-style-type: none"> West Coast Silver is undertaking validation of the historical data to determine whether this information has been collected in full. Only limited data is available in the open file reports addressing this criterion. However, for early stage, regional grass roots exploration the CP regards the absence of this information is not considered material. These criteria will be validated within the Elizabeth Hill historic mine environment with twinning historic drill holes.
Logging	<ul style="list-style-type: none"> <i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i> <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i> <i>The total length and percentage of the relevant intersections logged.</i> 	<p><i>West Coast Silver Drilling</i></p> <ul style="list-style-type: none"> Diamond drill core is orientated, and geologically and geotechnically logged by an experienced team of geologists into spreadsheets on a laptop computer and the data stored in a database. All core logging was both qualitative and quantitative in nature. Photographs are taken prior to the cutting and sampling of the core; the core is wetted to improve the visibility of features in the photographs.

Criteria	JORC Code explanation	Commentary
		<p><i>Alien Metals Drilling</i></p> <ul style="list-style-type: none"> All RC drill holes have been geologically logged for lithology, weathering, and other features of the samples using sieved rock chips from the drill sample piles. The level of geological detail is commensurate with the nature and limitations of this exploratory drilling technique. All DD core is logged for core loss, marked into metre intervals, orientated, when possible, structurally logged, and logged with a hand lens with the following parameters recorded where observed: weathering, regolith, rock type, alteration, mineralisation, shearing/foliation and any other features that are present. All DD core is photographed both wet and dry after logging, before cutting. All drill holes were logged in full and logging is of a sufficient quality for the information to be used in future Mineral Resource Estimates, mining studies and metallurgical studies. Data relating to geological observations and the sampling intervals was entered into a standard industry database. <p><i>Pre-2021 Historical Drilling</i></p> <ul style="list-style-type: none"> Most historic drill holes were geologically logged to various degrees of detail. West Coast Silver is undertaking verification of the quality and level of detail of the geological logging data. West Coast Silver has done sufficient verification of the data, in the CP's opinion to provide sufficient confidence the logging was performed to adequate industry standards and is fit for the purpose of planning exploration programmes and generating targets for investigation.

Criteria	JORC Code explanation	Commentary
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<p><i>West Coast Silver Drilling</i></p> <ul style="list-style-type: none"> Samples for laboratory analyses were taken by sawing the DD core in half along a cutting line, which is offset from the core orientation line. The half of the drill core, sample length of typically 1m, without the orientation line is collected for assaying. Duplicate samples were collected by sawing the remaining half core into two quarter cores, taking a quarter core but preserving the quarter core with the orientation line on it. Original and QAQC samples (CRM standards, blanks and core duplicates) were sent to the laboratory for analysis (ALS Perth for all elements and secondary assaying at ALS Langley Canada for any over grade Ag assays). Entire DD samples were crushed (CRU-21) then fine crushed (CRU-31) to 70% passing 2mm. The sample was then split with a Boyd Rotary Splitter (SPL-22Y) and a 250g split sample was subsequently pulverised (method PUL-25a) to 85% passing 75 µm. These preparation methods are standard and appropriate for the samples. The 1m half core samples are appropriate to the grain size of the material being sampled. <p><i>Alien Metals Drilling</i></p> <ul style="list-style-type: none"> All RC samples were put through a cone splitter and the sample was collected in a unique pre-numbered calico sample bag. The moisture content of each sample was recorded in the database. The RC samples were sorted, oven dried, the entire sample was pulverised in a one stage process to 85% passing 75 µm. The bulk pulverised sample was then bagged and approximately 200g extracted by spatula to a numbered paper bag that was used for the assay charge. The DD core samples were cut in half and the right half of the core was submitted for assay. They are oven dried, jaw crushed to nominal <10mm, 3.5kg was obtained by riffle splitting and the remainder of the

Criteria	JORC Code explanation	Commentary
		<p>coarse reject was bagged while the 3.5kg was pulverised in a one stage process to 85% passing 75 µm. The bulk pulverised sample was then bagged and approximately 200g extracted by spatula to a numbered paper bag that was for the assay charge.</p> <ul style="list-style-type: none"> For some RC drilling, typically in areas where the geologist decides that there is no mineralisation, 4m were taken and used for assay. The RC drill spoil samples were collected by traversing each sample pile systematically by scoop to obtain similar volumes of representative material for the nominated composite interval. This is regarded as a fit for purpose sampling regime for the type of drilling and the current stage of exploration. Field duplicate RC sampling was also undertaken with the drillers collecting a duplicate at the same time as the main sample off the second sample port on the cone splitter or re-splitting of the reject interval if using a riffle splitter. The samples were then sent to Bureau Veritas Laboratory in Perth for sample preparation and analysis. At the laboratory, the samples were sorted and discrepancies to documentation notified to the Company, oven dried, crushed to -10mm for core samples, riffle split if oversize and the bulk reject was retained. The sample was then pulverised in a vibrating disc pulveriser in a single step to 95% passing 105µm, a ~200g was split off and bagged for analysis and the bulk reject was retained. The sample sizes are appropriate for the geology and style of mineralisation being investigated. <p><i>Pre-2021 Historical Drilling</i></p> <ul style="list-style-type: none"> Various sampling methods have been employed previously for non-core drilling. Information is available for some anomalous drill holes discussed in this report. The CP cannot confirm but expects the DD core was cut and sampled

Criteria	JORC Code explanation	Commentary
		<p>according to industry standard (half core) techniques.</p> <ul style="list-style-type: none"> Information on sample moisture content is available for some drilling. Where available most samples were dry. Information on sample preparation is not available for most drilling. Information for quality control procedures for all subsampling is not available for most drilling. Sample sizes have not been described in historic reports. Information on field duplicates is not available in historic reports.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> <i>For geophysical tools, spectrometres, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i> 	<p><i>West Coast Silver Drilling</i></p> <ul style="list-style-type: none"> Laboratory samples were analysed at ALS laboratories (Perth) for 48 elements, four acid digestion and ICP-MS finish. Samples with above upper detection limit analyses were then analysed at ALS laboratories (Langley, Canada) with Ag-OG62 (four acid, ore grade Ag), ME-OG62 (four acid ore grade elements), Zn-OG62 (ore grade Zn – four acid), Ag-GRA21 (Ag 30g FA-GRAV finish), Au-AA26 (ore grade Au 50g FA AA finish and Ag-CON01 (Ag concentrate). Four acid digestion is considered a near total digestion. Commercial standards (OREAS-353b, OREAS-602c, GEOSTATS G919-2 and GEOSTATS GBM313-11) were inserted after every sample which number ends 25, a blank sample was inserted after every sample which number ends in 75. Duplicate samples (quarter core) were taken of every sample which number ends in 49 and 99. Acceptable levels of accuracy and precision have been established. <p><i>Alien Metals Drilling</i></p>

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> Assaying was completed by Bureau Veritas Laboratory in Perth, an accredited commercial laboratory. All sample results have been received. For both RC and DD drilling samples, appropriate commercial CRM standards, blanks and field duplicates were submitted at the rate of around 5% of all samples. An aliquot of sample is fused with Sodium Peroxide and the melt is dissolved in dilute hydrochloric acid and the solution analysed via Inductively Coupled plasma (ICP) Mass Spectrometry (MS). The detection limit for Ag is 5g/t. As part of normal procedures, the Company examines all standards and blanks to ensure that they are within tolerances. Additionally, sample size, grind size and field duplicate results are examined to ensure no bias to silver grade exists. <p><i>Pre-2021 Historical Drilling</i></p> <ul style="list-style-type: none"> Assaying and laboratory procedures are not available for most historical drilling. However, where available this information is described as below. Samples have been sent to Genalysis Laboratories for analysis of Ag only by a two-acid (perchloric/hydrochloric) digest with AAS finish (lab code C/AAS) to a detection limit of 1ppm. Some drill samples of each batch were check analysed at Genalysis and Ultra Trace Laboratories by an accelerated cyanide leach with an AAS finish (lab code Leachwell/AAS) to a detection limit of 1ppm. Some samples of each batch were also analysed by Genalysis for Ag only by an Aqua Regia digest with an AAS finish (lab code B/AAS) to a detection limit of 0.1ppm. The tenor of results from different analytical techniques and different laboratories was generally comparable. The CP cannot independently verify the QAQC of these analyses.

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> C/AAS is considered a partial extraction. West Coast Silver has done sufficient verification of the assay data, and in the CP's opinion it provides sufficient confidence the assaying was appropriate for the mineralisation present and is fit for the purpose of planning exploration programmes and generating targets for investigation. None of the previous reports that have been reviewed by West Coast Silver to date specified the use of any spectrometers or handheld XRF tools.
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<p><i>West Coast Silver Drilling</i></p> <ul style="list-style-type: none"> Of the two DD holes reported to date, out of the 12 holes drilled by West Coast Silver, a single Alien Metals RC drill hole (22AMC001) was twinned to verify the nature of the geology and mineralisation. Drill core intersections were verified by both company and independent personnel. Primary data have been entered into spreadsheets on laptops which then have been verified and entered into the data base. Laboratory analyses for drill core samples have not been adjusted. <p><i>Alien Metals Drilling</i></p> <ul style="list-style-type: none"> Drill collar data, sample information, logging data and assay results have been verified, compiled, and validated by a separate person to the person conducting the logging and sampling. All laboratory reports have been received. All sample data is stored digitally in an offsite, secure, database (MX Deposit) and has been audited by independent external database

Criteria	JORC Code explanation	Commentary
		<p>specialists (Expedio Services, a Perth based geological consultancy).</p> <ul style="list-style-type: none"> Many of these holes are within 20m of previous RC and DD drilling. Results of this drilling confirm the location, widths and grade tenor of the existing drilling. <p><i>Pre-2021 Historical Drilling</i></p> <ul style="list-style-type: none"> Significant intersections have been taken from previous databases. The CP completed several spot checks of the source data and did not identify any issues with the reported intersections. West Coast Silver has done sufficient verification of the data, and in the CP's opinion it provides sufficient confidence that data entry, data verification, and data storage was performed to adequate industry standards and is fit for the purpose of planning exploration programmes and generating targets for investigation. No adjustments have been made to any assay data.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<p><i>West Coast Silver Drilling</i></p> <ul style="list-style-type: none"> 2025 drill holes were initially located using handheld GPS, with accuracy to within 5m. At the completion of the drilling, collars have been located using a Emlid Reach RS2+ Differential GPS (DGPS) with a horizontal accuracy of 7mm and a vertical accuracy of 14mm. 2025 drilling uses downhole gyro for surveys which is uploaded to the IMDEX HUB-IQ cloud based storage. A 0.5m DTM is used for topographic control. Data has been collected in GDA94/MGA Zone 50. <p><i>Alien Metals Drilling</i></p> <ul style="list-style-type: none"> Drill hole collar locations were located using a handheld GPS with an

Criteria	JORC Code explanation	Commentary
		<p>expected accuracy of +/-3m for easting and northing. Elevations were interpolated from the SRTM DEM grid of the area.</p> <ul style="list-style-type: none"> • Down hole surveys using a north seeking gyro were undertaken on most of the drill holes. When no down hole survey was available, the collar dip and azimuth were used. • A Mineral Resource or Ore Reserve is not determined. • Several grid systems have been used previously, including AGD 1966 AMG Zone 50, AGD 1984 AMG Zone 50 and GDA 1994 MGA Zone 50 and local grid systems. • Previous data in grid systems AGD 1966 AMG Zone 50 and AGD 1984 AMG Zone 50 and local grid systems have been converted to MGA 94 Zone 50. • A digital terrain model (DTM) with an accuracy for RL of 5cm was acquired with the orthophotography for part of the tenements and RLs for drill holes were adjusted to it. • RLs for drill holes outside the DTM have been taken from the handheld GPS or determined from the SRTM DTM (tile size 30m). • West Coast Silver has done sufficient verification of the data; in the CP's opinion it provides sufficient confidence in the accuracy and quality of survey data and that it is fit for the purpose of planning exploration programmes and generating targets for investigation. <p><i>Pre-2021 Historical Drilling</i></p> <ul style="list-style-type: none"> • Historic drill holes were located in a local grid and more recent with handheld GPS with an accuracy of $\pm 5\text{m}$. • Where drill collars were clearly identifiable (mainly in the Elizabeth Hill mine area), West Coast Silver surveyed the collars with a Emlid Reach

Criteria	JORC Code explanation	Commentary
		<p>RS2+ DGPS with a horizontal accuracy of 7mm and a vertical accuracy of 14mm.</p> <ul style="list-style-type: none"> Drill hole down hole surveys in historic drilling are typically restricted to the collar set up (compass, inclinometer).
<i>Data spacing and distribution</i>	<ul style="list-style-type: none"> <i>Data spacing for reporting of Exploration Results.</i> <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> <i>Whether sample compositing has been applied.</i> 	<p><i>West Coast Silver Drilling</i></p> <ul style="list-style-type: none"> Core samples for laboratory analyses have been taken of core intervals where the geologist logged alteration and mineralisation typically on a 1m sample length but may be reduced to 0.5m or extended to 1.2m where geological parameters require. <p><i>Alien Metals Drilling</i></p> <ul style="list-style-type: none"> Alien drilling was spaced 10m for diamond drill holes and between 23m and 85m for RC drill holes. The Alien drill holes were designed to verify historic drill results and test for extension of mineralization. No Mineral Resource or Ore Reserve are reported. Alien RC drill holes were composited into 4m samples and infilled to 1m where mineralization was recorded. <p><i>Pre-2021 Historical Drilling</i></p> <ul style="list-style-type: none"> Most of the historic drilling was focused on the Elizabeth Hill mine which is not the subject of this report. Regional drill spacing is variable and can be assessed in Figure 1 of this report. No Mineral Resource or Ore Reserve are reported. Sample compositing in historic drilling is variable and ranges from 2m to 4m.

Criteria	JORC Code explanation	Commentary
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<p><i>West Coast Silver Drilling</i></p> <ul style="list-style-type: none"> The drilling has an average dip of -61° across the program. This dip allows the drill holes to penetrate the mineralised envelope fully. Angled drilling is being used to investigate cross-cutting mineralised structures, with assessment ongoing. Drill holes have been oriented both at high angle and subparallel to the interpreted mineralisation hosting structure. <p><i>Pre-2021 Historical Drilling & Allen Metals Drilling</i></p> <ul style="list-style-type: none"> The local stratigraphy and contained mineralisation comprising the Elizabeth Hill silver deposit has a northerly trend and a near vertical dip. The drilling was generally orientated towards the east or west with some holes angled due to rough terrain making placement of the drill rig impractical. The true orientation of mineralised bodies in this area is generally known and no bias is indicated through the drill orientation.
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<p><i>West Coast Silver Drilling</i></p> <ul style="list-style-type: none"> Drill core was transported from the drill rig to the storage facility in Karratha. Drill core was stored in a secure yard in Karratha rented by the Company. Diamond core samples were collected in individual calico bags, and several calico bags were then stored in zip locked and labelled polyweave bags. The polyweave bags were transported to the ALS laboratory (Perth) by a commercial transport company.

Criteria	JORC Code explanation	Commentary
		<p><i>Alien Metals Drilling</i></p> <ul style="list-style-type: none"> All drill samples collected during the program were freighted directly to the Bureau Veritas Laboratory in Perth for submission. Sample security was not considered a significant risk to the project. Only employees of the Company were involved in the collection, secure core yard storage and delivery of samples to the freight companies secure yard. There was a chain of custody from receipt at the freight company to the Perth laboratory. <p><i>Pre-2021 Historical Drilling</i></p> <ul style="list-style-type: none"> Due to the historical nature of the data, this has not and may not be determinable. West Coast Silver believes that none of the historical samples have been preserved.
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> No audits or complete reviews of the sampling techniques and data has taken place by West Coast Silver or any independent parties.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> The results reported in this announcement refer to core from holes drilled wholly on M47/342. The tenement lies within the Ngarluma Native Title claim. The tenement is in good standing with no known impediments.
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> The Elizabeth Hill deposit and adjoining area has been explored for Ni, Cu, PGM, base metals, Li and Ag mineralisation since 1968 when US Steel International Inc explored the area for base metals and nickel. Massive silver was discovered in ~1994-1995 by Legend mining NL in a percussion hole drilling program. Further drilling followed and in 1997 an exploration shaft and drive was sunk by East Coast Minerals NL. Underground mining at Elizabeth Hill was conducted in 1999-2000 with additional drilling completed by East Coast Minerals NL until the project was sold to Global Strategic Metals NL in 2012. Alien Metals Ltd purchased lease M47/342 in early 2020. Considerable exploration for Ni, Cu, PGM was conducted by Hunter Resources dating back to the 1980s. Helix Resources acquired the Munni Munni Project in the late 1990's and undertook a number of scoping studies. In 2002, a SRK Mineral Resource estimate for PGE and Au was published in accordance with the JORC code. Subsequently, Platina Resources undertook mining studies and two scoping studies for the PGE and Au mineralisation. West Coast Silver Limited is in the process of verifying and collating all historical data.
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> The Elizabeth Hill silver mineralisation is structurally controlled and is located on the eastern boundary of the north-south trending Munni Munni Fault. Mineralisation has been intersected over a 100m north-south zone along the boundary of the Munni Munni Fault, plunging south along the granite contact. The zone has an east-west width of 15-20m with the high-grade core restricted to

Criteria	JORC Code explanation	Commentary
		around 3m width in the region of the underground workings. The mineralised zone is separated into several pods and occurs within a quartz carbonate chalcedonic silica breccia that shows veining. The silver occurs in fine disseminations, needles, veins, nuggets and platelets up to several centimetres in diameter.
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> o easting and northing of the drill hole collar o elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar o dip and azimuth of the hole o down hole length and interception depth o hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case 	<ul style="list-style-type: none"> Drill information relevant to this release has been provided above in the announcement and Appendices 1 and 2.
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g., cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated 	<ul style="list-style-type: none"> Drill core intersections reported in this announcement have been calculated using a 25g/t Ag cut-off and are length weighted. Pb analyses of core samples have a 10,000g/t upper cut-off due to the assay technique used. No metal equivalent values are reported. Historical drilling assay data referenced has previously been reported.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g., 'down hole length, true width not known'). 	<ul style="list-style-type: none"> Drill hole intersections are not true widths due to sub vertical geometry of the mineralised body and the average -61° dip of the drill holes in the 2025 drill program.
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> Appropriate maps and figures have been included in this announcement.
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results 	<ul style="list-style-type: none"> All relevant and material exploration data to highlight the target areas discussed have been reported or referenced. The five elements Ag, Au, Cu, Pb and Zn have been reported only as they are deemed to be anomalous in mineralised zones. Drill collar data referenced in this release have been previously reported.

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> Significant historical drill assay information relevant to this release have been previously reported.
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances 	<ul style="list-style-type: none"> All relevant and material exploration data for the target areas discussed, have been reported or referenced.
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (e.g., tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> Further work will include but not limited to systematic geological mapping, channel and rock chip sampling, soil sampling, geophysics, structural interpretation, historical data compilation, and drilling to identify suitable host rock geology and structural architecture for polymetallic mineralisation. Diagrams are included in the release.