



MT BOGGOLA (WA) DRILLING UPDATE

COPPER - GOLD – SILVER – LEAD

TechGen Metals Limited (“TechGen” or the “Company”) is pleased to provide an update on the recently completed reverse circulation (RC) and diamond drilling program at the Mt Boggola Project in Western Australia. Three holes were completed in late March, each comprising RC pre-collars with diamond core tails, with the final assay results now received. Two holes were drilled at the MB1 target and one hole at the MB4 target.

STRATEGIC HIGHLIGHTS

- Diamond drilling at the Mt Boggola Project (MBDD003) intersected high-grade mineralisation, returning **0.18m @ 5.68% Pb and 49.7g/t Ag from 216.67m**.
- Significant copper mineralisation was also intersected in RC pre-collars at MB1 and MB4 targets:
 - **4m @ 1.04% Cu from 9m** (MBDD001; MB1)
 - **20m @ 1.14% Cu from 22m** (MBDD003; MB4)
- Two mineralised veins containing visible galena returned assays above 1% lead:
 - **1m @ 1.06% Pb from 144m** (MBDD002; MB1)
 - **0.18m @ 5.68% Pb, including 49.7g/t Ag, from 216.67m** (MBDD003; MB4)
- Multiple zones of anomalous polymetallic mineralisation (>0.1% Cu, Pb and Zn) were intersected across the drilling program.
- Banded iron formation was identified at depth in MBDD003, providing a geological explanation for the magnetic anomaly at the MB4 target.
- Assay results remain under interpretation, with follow-up work to prioritise high-grade copper mineralisation identified in MBDD001 and MBDD003.
- Additional follow-up targets include historic Newcrest drilling at the adjacent Sadlers Prospect, which returned **9m @ 1.86% Cu from 47m**, along strike from MBDD003 (**20m @ 1.14% Cu from 22m**).

TechGen’s Managing Director, Ashley Hood, commented:

“With final assay results now received, the Mt Boggola drilling has confirmed significant multi-element mineralisation within the system, including copper near surface and elevated silver and lead at depth. The results are consistent with a polymetallic mineral system (Cu–Au–Ag–Pb–Zn) hosted in primary sulphides, with mineralisation observed in multiple styles and at different levels within the broader system. When integrated with historical drilling data, the results indicate a fertile mineralised system at Mt Boggola, characterised by both near-surface oxidation and deeper primary sulphide mineralisation.

Independent geological review is underway to refine the structural interpretation of the system, which is considered to be structurally controlled and associated with fluid flow pathways responsible for mineral deposition. These interpretations will inform the next phase of exploration, including targeted geophysics and follow-up RC drilling to further test copper mineralisation identified in MBDD003 and the Sadlers Prospect, and to refine vectors toward higher-grade zones and widths within the system.”



For personal use only

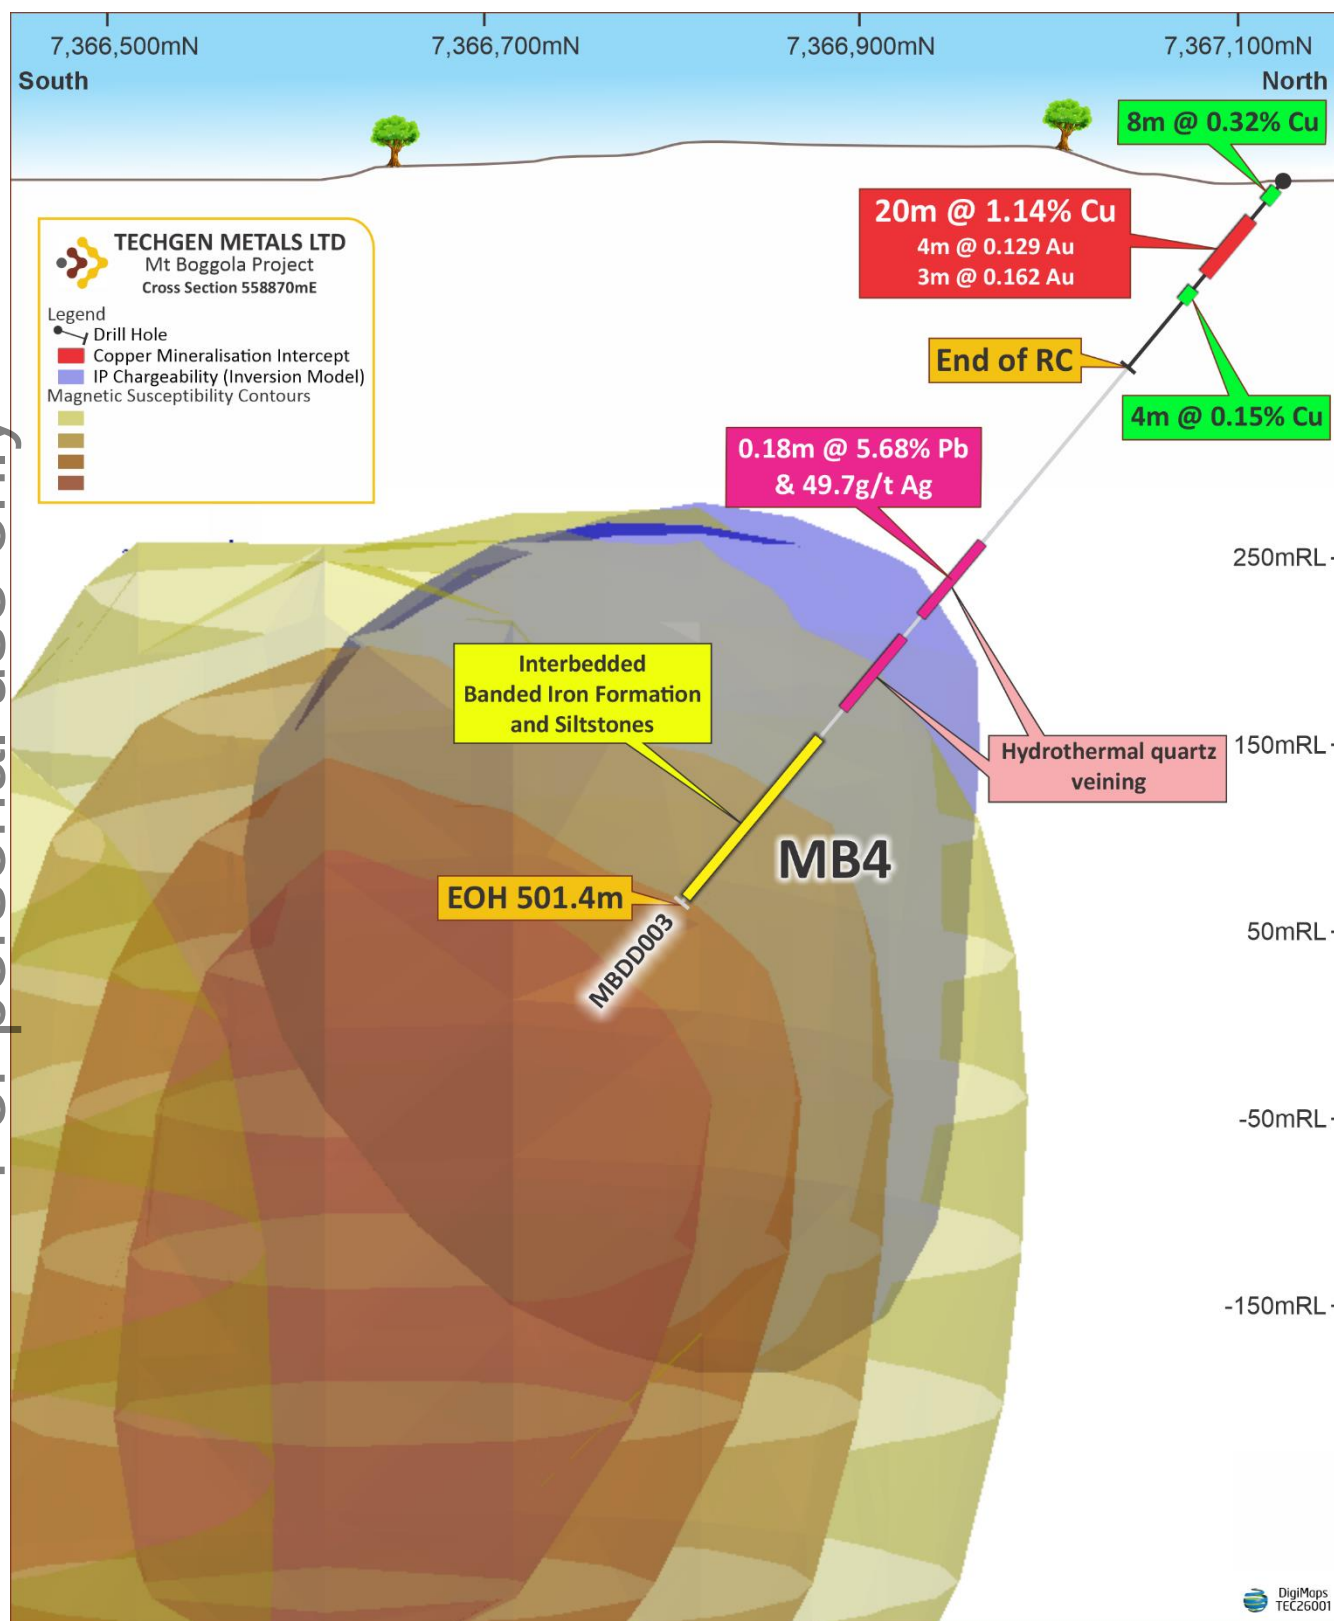


Figure 1: Section view of drill hole MBDD003 testing target MB4, coincident IP chargeability high & magnetic feature.

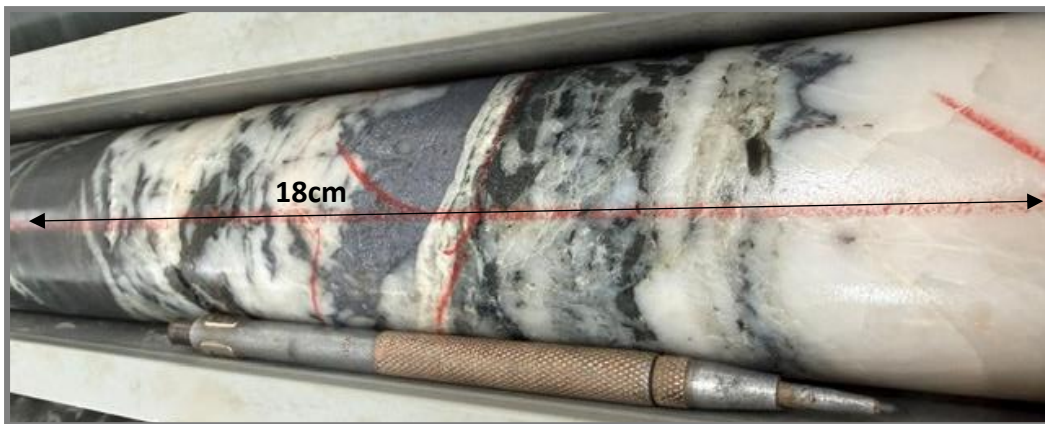


Photo 1: Section of 5.68% Lead & 49.7g/t Silver from 216.67m in MBDD003.

The Mt Boggola Project is located in the Proterozoic-aged Ashburton and Edmund Basins in Western Australia. The project is located 60 km south of Paraburdoo on Exploration Licences E08/2996, E08/3269, E08/3728 and E08/3830 covering a combined area of 458 km².

Drilling for this first program was completed with three holes drilled for 1,109 metres. At Mt Boggola the Company has identified 4 IP chargeability targets, MB1 - MB4 (Figures 1 & 2). Surface soil Cu-As-Au-Pb anomalism and high-grade Cu, Au, Sb & Pb rock chips are present throughout the target areas along with widespread malachite occurrences.

The 3 drill holes completed consisted of RC pre-collars with diamond core tails. All assay results have now been received. The RC pre-collars were sampled throughout the entire length of each hole. Some intervals of diamond core has not been assayed at this stage but 700 metres out of a total of 809 metres of diamond core has been assayed.

Assay results received from the three RC pre-collars have returned a wide high-grade intersection of **20 metres @ 1.14% Copper** from 22 metres down hole in hole MBDD003 (ASX announcement 25 March 2026; Table 1). This intercept corresponds with logged malachite occurrences. An intersection of **4 metres @ 1.04% Copper** from 9 metres downhole was returned from hole MBDD001 also corresponding to logged malachite occurrences. Anomalous levels of gold and lead were also returned from the RC pre-collar samples.

Assay results received from the three diamond core tails have returned higher grade results from two veins with visible galena present (Holes MBDD002 & MBDD003; Tables 1 - 3). These intersections in the diamond core are **1m @ 1.06% Lead** from 144m (Hole MBDD002; MB1 target) & **0.18m @ 5.68% Lead & 49.7g/t Silver** from 216.67m (Hole MBDD003; MB4 target). Several zones of anomalous +0.1% Copper, Lead & Zinc have also been intersected in the drilling.

Banded iron formation interbedded with siltstones and shales was intersected from 417m through to the end of hole MBDD003 and explains the magnetic feature present at the MB4 target. The drilling also suggests that the IP chargeability features at the MB1 and MB4 targets are related to pyrite ± weakly anomalous copper, lead and zinc. Significant copper mineralisation was intersected in the RC pre-collars of holes MBDD001 & MBDD003 and future work will look to target these zones down dip and along strike.



For personal use only

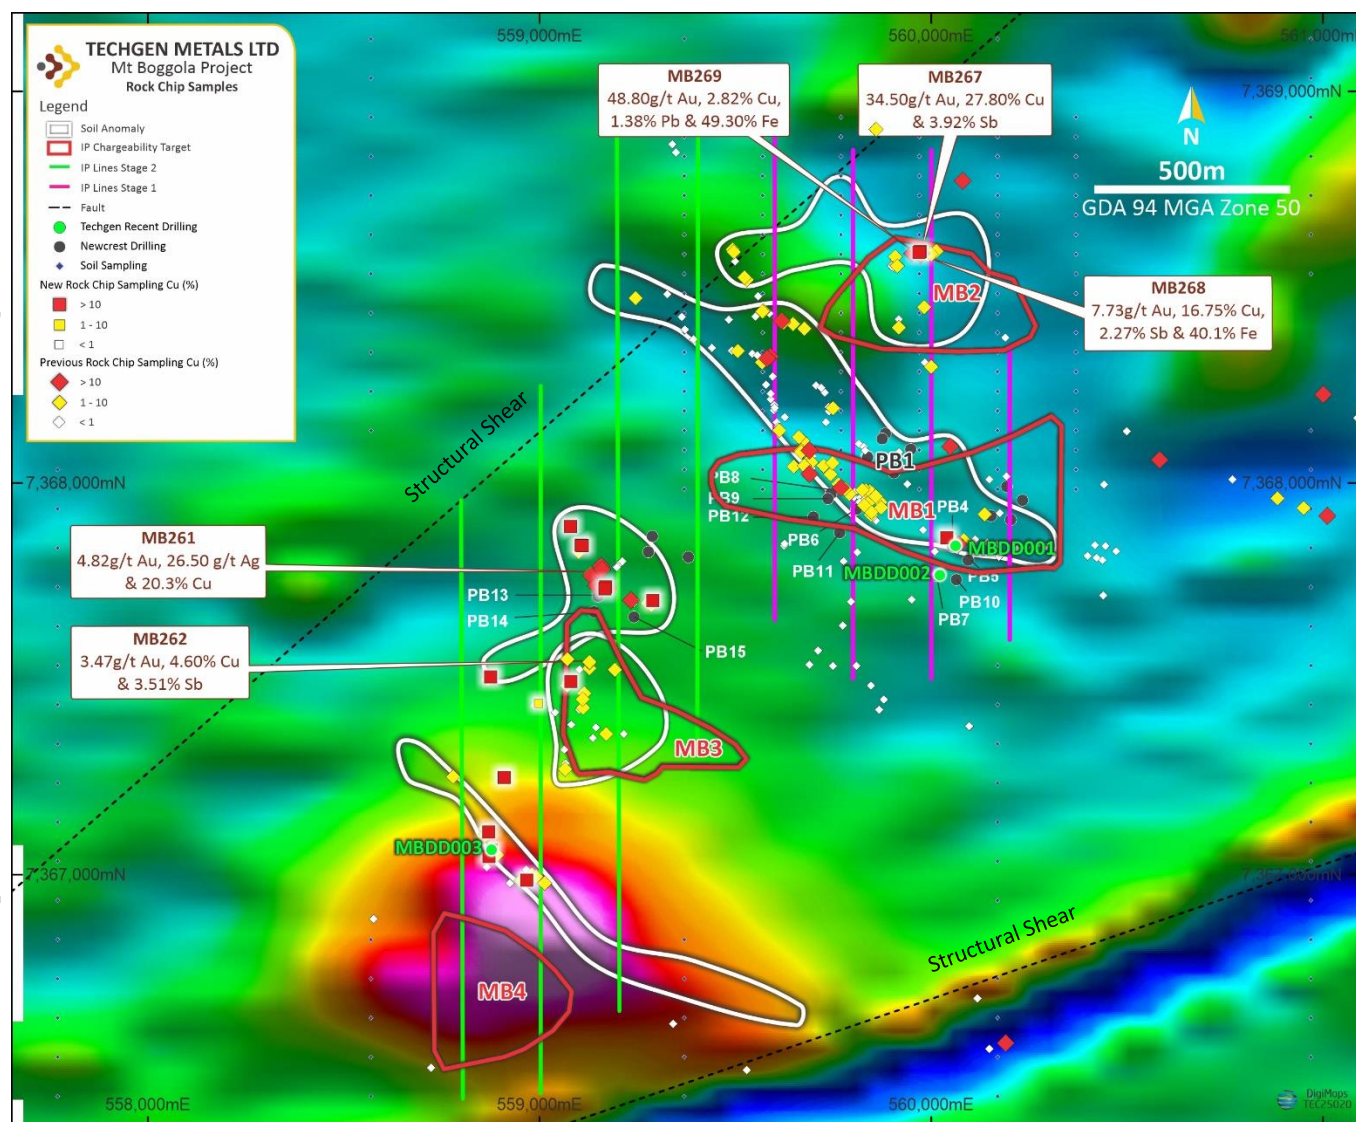


Figure 2: MB1-MB4 IP Targets, soils, rock chips & completed drilling on magnetics.



Table 1. Anomalous assay results from hole MBDD001 (Cu, Pb, Zn > 0.1%; Au > 0.1g/t), Mt Boggola Project.

Hole No.	Easting	Northing	Azimuth	Dip	RC Depth (m)	End Of Hole (m)	From (m)	To (m)	Cu %	Au g/t	Pb %	Zn %
MBDD001	560054	7367838	330	-60	89.8	255.6	0	4			4m @ 0.189	
MBDD001							9	13	4m @ 1.04	4m @ 0.221	4m @ 0.391	
MBDD001							15	28	13m @ 0.176			
MBDD001							64	72			8m @ 0.231	
MBDD001							84	92			8m @ 0.137	
MBDD001							96	97			1m @ 0.144	
MBDD001							102	105	3m @ 0.10			
MBDD001							151	152			1m @ 0.577	1m @ 0.1
MBDD001							167	169	2m @ 0.105		2m @ 0.173	
MBDD001							174	175	1m @ 0.144			
MBDD001							178	179	1m @ 0.13			
MBDD001							184	185	1m @ 0.119		1m @ 0.121	
MBDD001							189	190			1m @ 0.117	
MBDD001							192	193				1m @ 0.12
MBDD001							194	195	1m @ 0.113			
MBDD001							200	202				2m @ 0.133
MBDD001							204	206	2m @ 0.14			
MBDD001							211	212	1m @ 0.125		1m @ 0.261	1m @ 0.106
MBDD001							212	213			1m @ 0.145	1m @ 0.143
MBDD001							214	215			1m @ 0.157	1m @ 0.232
MBDD001							228	229	1m @ 0.116			



Table 2. Anomalous assay results from hole MBDD002 (Cu, Pb, Zn > 0.1%; Au > 0.1g/t), Mt Boggola Project.

Hole No.	Easting	Northing	Azimuth	Dip	RC Depth (m)	End Of Hole (m)	From (m)	To (m)	Cu %	Au g/t	Pb %	Zn %
MBDD002	560014	7367763	25	-60	89.4	351.5	28	44			16m @ 0.134	
MBDD002							68	72			4m @ 0.11	
MBDD002							80	84			4m @ 0.13	
MBDD002							98	99				1m @ 0.109
MBDD002							100	103			3m @ 0.45	3m @ 0.289
MBDD002							107	108			1m @ 0.494	1m @ 0.125
MBDD002							108	109			1m @ 0.142	
MBDD002							124	125			1m @ 0.213	
MBDD002							130	131			1m @ 0.109	
MBDD002							137	138			1m @ 0.184	
MBDD002							142	145			3m @ 0.496	
MBDD002							170	174			4m @ 0.16	
MBDD002							180	182	2m @ 0.153		2m @ 0.105	
MBDD002							198	199	1m @ 0.159			
MBDD002							218	219	1m @ 0.149			
MBDD002							267	268		1m @ 0.149		
MBDD002							268	269	1m @ 0.11			
MBDD002							277	278			1m @ 0.246	1m @ 0.107



Table 3. Anomalous assay results from hole MBDD003(Cu, Pb, Zn > 0.1%; Au > 0.1g/t; Ag > 5g/t), Mt Boggola Project.

Hole No.	Easting	Northing	Azim	Dip	RC Depth (m)	End Of Hole (m)	From (m)	To (m)	Cu %	Au g/t	Ag g/t	Pb %	Zn %
MBDD003	558870	7367060	18	-50	90	501.4	0	8	8m @ 0.315				
MBDD003						including	1	2	1m @ 1.165				
MBDD003							12	16	4m @ 0.172				
MBDD003							20	21	1m @ 0.16				
MBDD003							22	42	20 @ 1.14				
MBDD003						including	25	31		6m @ 0.129			
MBDD003						including	29	30	1m @ 4.92				
MBDD003						including	30	31	1m @ 2.14				
MBDD003						including	35	36	1m @ 2.38				
MBDD003						including	34	37		3m @ 0.162			
MBDD003						including	33	41				8m @ 0.189	
MBDD003							44	48	4m @ 0.15				
MBDD003							184	190					6m @ 0.145
MBDD003							195	207				12m @ 0.234	12m @ 0.131
MBDD003							211	212					1m @ 0.109
MBDD003							216.7	217			0.18m @ 49.7	0.18m @ 5.68	
MBDD003							278	280	2m @ 0.182				
MBDD003							391	392					1m @ 0.152
MBDD003							394	398				4m @ 0.176	4m @ 0.32
MBDD003							401	402					1m @ 0.217
MBDD003							403	404				1m @ 0.33	
MBDD003							413	415				2m @ 0.161	2m @ 0.13
MBDD003							416	417					1m @ 0.11
MBDD003							442	443				1m @ 0.232	



TECHGEN METALS
LIMITED

ASX Announcement | ASX: TG1

References

TG1 ASX Announcement "Mt Boggola Project – Exploration Update" – 28/11/2022.

TG1 ASX Announcement "Northern Star Copper Gold Iron Antimony target" - 26/11/2024.

TG1 ASX Announcement "IP Geophysics Deliver Significant Anomalies at Mt Boggola" - 3/07/2025.

TG1 ASX Announcement "Progress Across WA Copper-Gold Portfolio" - 23/07/2025.

TG1 ASX Announcement "Mt Boggola Cu-Au-Sb 3D modelling & Heritage progress" - 4/09/2025.

TG1 ASX Announcement "Mt Boggola Cu-Au-Ag Drilling has commenced" – 17/02/2026.

TG1 ASX Announcement "Mt Boggola Cu-Au-Ag-Pb First Diamond Hole" – 26/02/2026.

TG1 ASX Announcement "Significant Copper Mineralisation confirmed at Mt Boggola" – 25/03/2026.

TG1 ASX Announcement "Amended - Significant Copper Mineralisation confirmed at Mt Boggola" – 26/03/2026.

ENDS.



TECHGEN METALS
LIMITED

ASX Announcement | ASX: TG1

About TechGen Metals Limited



For personal use only

TechGen is an Australian registered exploration Company with a primary focus on exploring and developing its copper, gold, and antimony projects strategically located in highly prospective geological regions in WA, NT and NSW.

For more information, please visit our website: www.techgenmetals.com.au

Authorisation

For the purpose of Listing Rule 15.5, this announcement has been authorised for release by the Board of Directors of TechGen Metals Limited.

Competent Person Statement

The information in this announcement that relates to Exploration Results is based on and fairly represents information compiled and reviewed by Andrew Jones, a Competent Person who is a member of the Australasian Institute of Mining and Metallurgy (AusIMM). Andrew Jones is employed as a Director of TechGen Metals Limited. Andrew Jones has sufficient experience that is relevant to the style of mineralisation and type of deposits under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 edition of the Australasian Code of Reporting of Exploration Results, Mineral Resources and Ore Reserves. Andrew Jones consents to the inclusion in this announcement of the matters based on his work in the form and context in which it appears.



TECHGEN METALS
LIMITED

ASX Announcement | ASX: TG1

Previously Reported Information

Any information in this announcement that references previous exploration results is extracted from previous ASX Announcements made by the Company.

Cautionary statement

Certain information in this announcement may contain references to visual results. The Company draws attention to the inherent uncertainty in reporting visual results. Visual estimates of mineral abundance should never be considered a proxy or substitute for laboratory analyses where concentrations or grades are the factor of principal economic interest. Visual estimates also potentially provide no information regarding impurities or deleterious physical properties relevant to valuations.

Forward Looking Statements

Certain information in this document refers to the intentions of TechGen, however these are not intended to be forecasts, forward looking statements, or statements about the future matters for the purposes of the Corporations Act or any other applicable law. Statements regarding plans with respect to TechGen's projects are forward looking statements and can generally be identified using words such as 'project', 'foresee', 'plan', 'expect', 'aim', 'intend', 'anticipate', 'believe', 'estimate', 'may', 'should', 'will' or similar expressions. There can be no assurance that the TechGen's plans for its projects will proceed as expected and there can be no assurance of future events which are subject to risk, uncertainties and other actions that may cause TechGen's actual results, performance, or achievements to differ from those referred to in this document. While the information contained in this document has been prepared in good faith, there can be given no assurance or guarantee that the occurrence of these events referred to in the document will occur as contemplated. Accordingly, to the maximum extent permitted by law, TechGen and any of its affiliates and their directors, officers, employees, agents and advisors disclaim any liability whether direct or indirect, express or limited, contractual, tortious, statutory or otherwise, in respect of, the accuracy, reliability or completeness of the information in this document, or likelihood of fulfilment of any forward-looking statement or any event or results expressed or implied in any forward-looking statement; and do not make any representation or warranty, express or implied, as to the accuracy, reliability or completeness of the information in this document, or likelihood of fulfilment of any forward-looking statement or any event or results expressed or implied in any forward-looking statement; and disclaim all responsibility and liability for these forward-looking statements (including, without limitation, liability for negligence).

For further information, please contact:

Mr Ashley Hood, Managing Director

P: +61 8 9481 0389

E: admin@techgenmetals.com.au

www.techgenmetals.com.au

JORC Code, 2012 Edition – Table 1 report template

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. - In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	- Drilling detailed in this report is RC & diamond drilling. - RC pre-collars have been composite scoop sampled. - Drill core has been cut and half-core sampled. - Samples were submitted to ALS Laboratories in Perth for drying and pulverising to produce a 50g sample for Fire Assay gold analysis. Samples were also assayed for a suite of multi-elements. - The laboratory used internal standards to ensure quality control.
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	Drilling mentioned is Reverse Circulation (RC) and Diamond drilling (HQ and NQ size).
Drill sample recovery	- Method of recording and assessing core and chip sample recoveries and results assessed. - Measures taken to maximise sample recovery and ensure representative nature of the samples. - Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	Recovery has been estimated during logging.
Logging	- Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. - Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. - The total length and percentage of the relevant intersections logged.	- Drilling has been logged onsite with a detailed geological and structural log also completed in Perth. - Core trays and RC chip trays have been photographed.
Sub-sampling techniques and sample preparation	- If core, whether cut or sawn and whether quarter, half or all core taken. - If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. - For all sample types, the nature, quality and appropriateness of the sample preparation technique. - Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. - Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. - Whether sample sizes are appropriate to the grain size of the material being sampled.	- For RC pre-collar the entire length was sampled. - For drill core the entire length was not sampled. - RC composite samples were created using a PVC scoop to collect sample material from individual 1m sample piles. The composite sample was placed in a pre-numbered calico bag and submitted to ALS Laboratories in Perth. Most samples were dry although some were moist or wet. These details were recorded at the time of drilling and sampling. - Sample preparation for drill samples involved drying the whole sample, pulverising to 85% passing 75 microns. A 50 gram sample charge was then used for the Fire Assay analysis. - Laboratory repeats (1:20) and standards (1:20) have been used to assess laboratory accuracy and reproducibility. - Sample sizes are considered appropriate for the grain size of the material sampled..

For personal use only

Criteria	JORC Code explanation	Commentary
Quality of assay data and laboratory tests	- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. - For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. - Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	- The samples were delivered to ALS Laboratories in Perth. - Samples were crushed and pulverised. - Samples were assayed by Fire Assay. This is considered an estimation of total gold content. Samples were also assayed for a suite of multi-elements. - The laboratory used internal standards to ensure quality control. - The assaying and laboratory procedures used are considered appropriate for the material tested. - No geophysical tools were used in determining element concentrations.
Verification of sampling and assaying	- The verification of significant intersections by either independent or alternative company personnel. - The use of twinned holes. - Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. - Discuss any adjustment to assay data.	- Significant intersections have not been independently verified. - Twinned drill holes are not considered necessary at this stage. - Field data was collected onto paper log sheets and then entered digitally. The assay results were checked by separate Company personnel. - Sample number, GPS coordinates and description were recorded in the field. - No adjustment has been made to assay data. - No Resource or Ore Reserve estimates are presented.
Location of data points	- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. - Specification of the grid system used. - Quality and adequacy of topographic control.	- The grid system for the Mt Boggola Project is Map Grid of Australia GDA 94, Zone 50. - Topographic data was obtained for public download of the relevant 1:250,000 scale map sheets, which is deemed adequate for the current purpose and stage of exploration.
Data spacing and distribution	- Data spacing for reporting of Exploration Results. - Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. - Whether sample compositing has been applied.	- Sample spacing is deemed appropriate to test the IP target areas. - Data spacing is deemed insufficient to establish geological and grade continuity to establish a mineral resource estimate. - RC pre-collars were a combination of 1m samples or 2 -5m composite samples.
Orientation of data in relation to geological structure	- Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. - If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	The orientation of the drilling is considered to be perpendicular to the overall strike of the regional features or outcrops being tested based on the current regional geological interpretation of the fabric and structures.
Sample security	The measures taken to ensure sample security.	Samples were taken and delivered to ALS Laboratories by Company personnel.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	No formal audit has been completed on the TechGen data being reported.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	The Mt Boggola Project comprises Exploration Licences, namely E08/2996, E08/3269, E08/3728 & E08/3830. The licences cover an area of 458km² owned 100% by TechGen. The Project lies on the Mt Vernon and Mininner Pastoral Leases and Unallocated Crown Land. The Project is subject to the Nharnuwangga Wajarri and Ngarlawangga native title determination (WCD2000/001) which incorporates an Indigenous Land Use Agreements (ILUA); the Jurruru #2 claim (WC2012/012) and the Yinhawangka Gobawarra claim (WC2016/004).

Criteria	JORC Code explanation	Commentary
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	- The Ashburton Mineral Field has a long history of gold, copper, silver, lead and zinc exploration and is among the oldest in the state. - In the 1970s and 1980s, majors like BHP, Newmont Corporation and BP Minerals began to explore the Ashburton Basin. This early exploration resulted in the initial identification of some significant deposits, namely Mt Clement and Mt Olympus.
Geology	Deposit type, geological setting and style of mineralisation.	The Project areas are located within the Ashburton Basin and Edmund Basin which forms the northern part of the Capricorn Orogen.
Drill hole Information	- A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - easting and northing of the drill hole collar - elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar - dip and azimuth of the hole - down hole length and interception depth - hole length. - If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	- The location of all drillholes is shown in a diagram in the main body of the Report. All hole collar locations, depths, azimuths and dips are tabulated. - No information has been excluded.
Data aggregation methods	- In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. - Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. - The assumptions used for any reporting of metal equivalent values should be clearly stated.	- Intersections of >0.1% Cu, >0.1g/t Au, >5g/t Ag, >0.1% Zn and >0.1% Pb are considered to be anomalous and all intervals are tabulated in the body of the announcement. Adjoining anomalous assay results have been amalgamated for the reporting of exploration results. - Maximum internal dilution is 3m. - No top cuts have been used. - No metal equivalent values are stated.
Relationship between mineralisation widths and intercept lengths	- These relationships are particularly important in the reporting of Exploration Results. - If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. - If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	Widths of mineralisation have not been postulated. All mineralised intervals quoted in this Report are quoted as downhole widths only. While the geometry of the mineralisation is not known, the orientation of the drillholes in relation to the interested geology is shown in the figures of the Report.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Suitable diagrams, photos and tables have been included in the body of the report.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	All available data is discussed.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	All meaningful and material exploration data has been discussed and no new exploration data is known.
Further work	- The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). - Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	Future work at the Mt Boggola Project is likely to include further drilling.