ASX Announcement

10 August 2026

ASX: GAL



PGM Target Zones Defined & New Gold Prospect at Norseman

For personal use only

Highlights

- **Assays from aircore drilling at Mission Sill returned anomalous PGM mineralisation at the predicted geological position on all seven drill lines completed**
- **Drill results include wide zones of Platinum Group Metals (PGM);**
  - **36m @ 0.31 g/t PGM 3E[1] including 4m @ 0.50 g/t 3E (NAC833)**
  - **20m @ 0.30 g/t PGM 3E including 4m @ 0.56 g/t 3E (NAC840)**
  - **16m @ 0.30 g/t PGM 3E including 1m @ 0.54 g/t 3E (NAC851)**
- **Shallow results confirm prospective rock unit with exploration focus now on two zones of consistent PGMs over 1.4km (Zone A) and 2km (Zone B)**
- **December 2025 RC drilling hit sulphides with PGM in both Zone A and Zone B demonstrating potential for development of significant mineralisation[2]**
- **New gold prospect identified at Callisto South with 4m @ 1.2 g/t gold from surface (NAC916) at a prospective geological contact with over 1.5km strike**
- **Next round of drilling scheduled to begin in September**

Galileo Mining Ltd (ASX: GAL, "**Galileo**" or the "**Company**") is pleased to provide drill results and exploration plans for the Company's 100% owned Norseman project in Western Australia.

Galileo Managing Director Brad Underwood commented; *"Assays from our June aircore drill campaign at Norseman have returned significant PGM results on every line drilled at our Mission Sill prospect. These results strengthen the prospectivity of the target rock unit at the Mission Sill and allow us to focus on the most likely zones for the development of significant sulphide mineralisation.*

[1] 3E = Pd + Pt + Au expressed in g/t
[2] Refer to ASX announcement dated 19th March 2026

Registered Office: 13 Colin St, West Perth, WA, 6005 Mailing Address: P.O. Box 415, West Perth WA 6872
Phone: +61 8 9463 0063 Email: info@galileomining.com.au Website: galileomining.com.au

For personal use only

With such an extensive land holding of prospective ground, the ability to narrow the search space with aircore drilling prior to deeper RC drilling is critical for the exploration process at Norseman.

In addition to drilling at the Mission Sill prospect, we undertook first pass reconnaissance drilling in an area at the Callisto South prospect. This initial drill program returned a significant gold result of 4m @ 1.2 g/t at the sheared contact between two rock units, a common setting for the development of gold in the West Australian goldfields region. Further work is planned at this location to follow up on this promising first result in an entirely new mineralised zone.

Our next drill campaign is scheduled to commence in September as we pursue an ambitious program to unlock the mineral potential in one of the most prospective regions of Western Australia."

Approximately 4,500m of aircore drilling was undertaken in June 2026 following up anomalous results at the Mission Sill prospect and undertaking first-pass reconnaissance drilling at the Callisto South prospect. Air core drilling at the Mission Sill was conducted over seven drill lines designed to infill areas with no data along the interpreted prospective rock unit. Each drill line returned anomalous PGM results and the prospective area has been refined into two zones (A and B) covering extensive strike lengths of 1.4km and 2km respectively. A very limited RC drill program at these two zones was undertaken in December 2025 with sulphides intersected beneath aircore drill anomalies.[2] Results from that program showed sulphide lenses developed at or close to the mafic/ultramafic rock contact. Now that the rock

Table 1 –Anomalous gold assay in aircore drilling (further details in Appendices)

Hole ID	From (m)	To (m)	Interval (m)	Gold (g/t)	Silver (g/t)	Sulphur (%)	Iron (%)	Magnesium (%)
NAC916	**0**	**4**	**4**	**1.22**	**0.33**	**0.37**	**5.63**	**1.64**

Table 2 –Selected anomalous PGM assays in air core drilling (further details in Appendices)

Hole ID	From (m)	To (m)	Interval (m)	3E (Pd+ Pt+ Au; g/t)	Palladium (g/t)	Platinum (g/t)	Gold (g/t)	Copper (%)	Nickel (%)
NAC833	4	40	36	0.31	0.17	0.11	0.02	0.04	0.29
including	**4**	**8**	**4**	**0.50**	**0.26**	**0.23**	**<0.01**	**0.02**	**0.04**
NAC840	0	20	20	0.30	0.18	0.11	0.02	0.07	0.25
including	**0**	**4**	**4**	**0.56**	**0.35**	**0.19**	**0.02**	**0.06**	**0.23**
NAC850	**0**	**5**	**5**	**0.54**	**0.46**	**0.07**	**0.01**	**0.03**	**0.03**
NAC851	28	44	16	0.30	0.18	0.11	0.01	0.03	0.28
including	**43**	**44**	**1**	**0.54**	**0.43**	**0.05**	**0.07**	**0.10**	**0.23**

contact has been well defined through aircore drilling, RC drilling is required within zones A and B to determine the size and grade of sulphide zones. See Figure 1 for location of drilling and Appendices for details of drill holes.


Reconnaissance drilling was undertaken at the Callisto South prospect over an area with no previous drilling (location maps in Figures 2 and 3). A significant gold result of 4m @ 1.2 g/t Au (NAC916) was returned from surface at the contact between an ultramafic rock and a quartz-diorite logged in the adjacent drill hole to the east. The drill result was from weathered regolith, was not highly enriched in iron (ie. non-lateritic), and is thought to represent dominantly in situ material as opposed to being a transported product. Partially weathered bed rock was intersected at 6m in NAC916 with fresh rock at 12m downhole depth. The occurrence of low levels of silver (0.33 g/t) and sulphur (implying the presence of sulphide) further support the gold prospectivity of this contact zone. The strike length of the mapped contact continues over 1.5km and follow up work will include detailed mapping and sampling prior to further drilling.

A new campaign of aircore drilling is planned to commence in September to follow up on anomalous rock chips up to 1.87 g/t PGM 3E. The rock chips outcrop just two kilometres along strike from the 17.5Mt Callisto resource and this area is believed to be highly prospective for new PGM discoveries (see ASX announcement dated 22nd July 2026). Additional drilling in previously untested areas along strike from Callisto North will be included in the September program. With over 20km of prospective strike around the Callisto resource, and highly variable regolith conditions from outcropping fresh rock to deeply weathered regolith, Galileo's exploration methodology utilises broad scale aircore drilling to define prospective areas prior to RC drilling. This allows the company to cover the ground efficiently and to refine targets prior to deep drilling.

For personal use only


For personal use only

Figure 1 – Mission Sill AC drilling with anomalous drill holes, mineralisation trend (dashed lines), and sulphide intercepts (announced 19/03/26). Listed sections of recent drilling are included in the appendices. TMI magnetic background. See Appendices for drilling details.

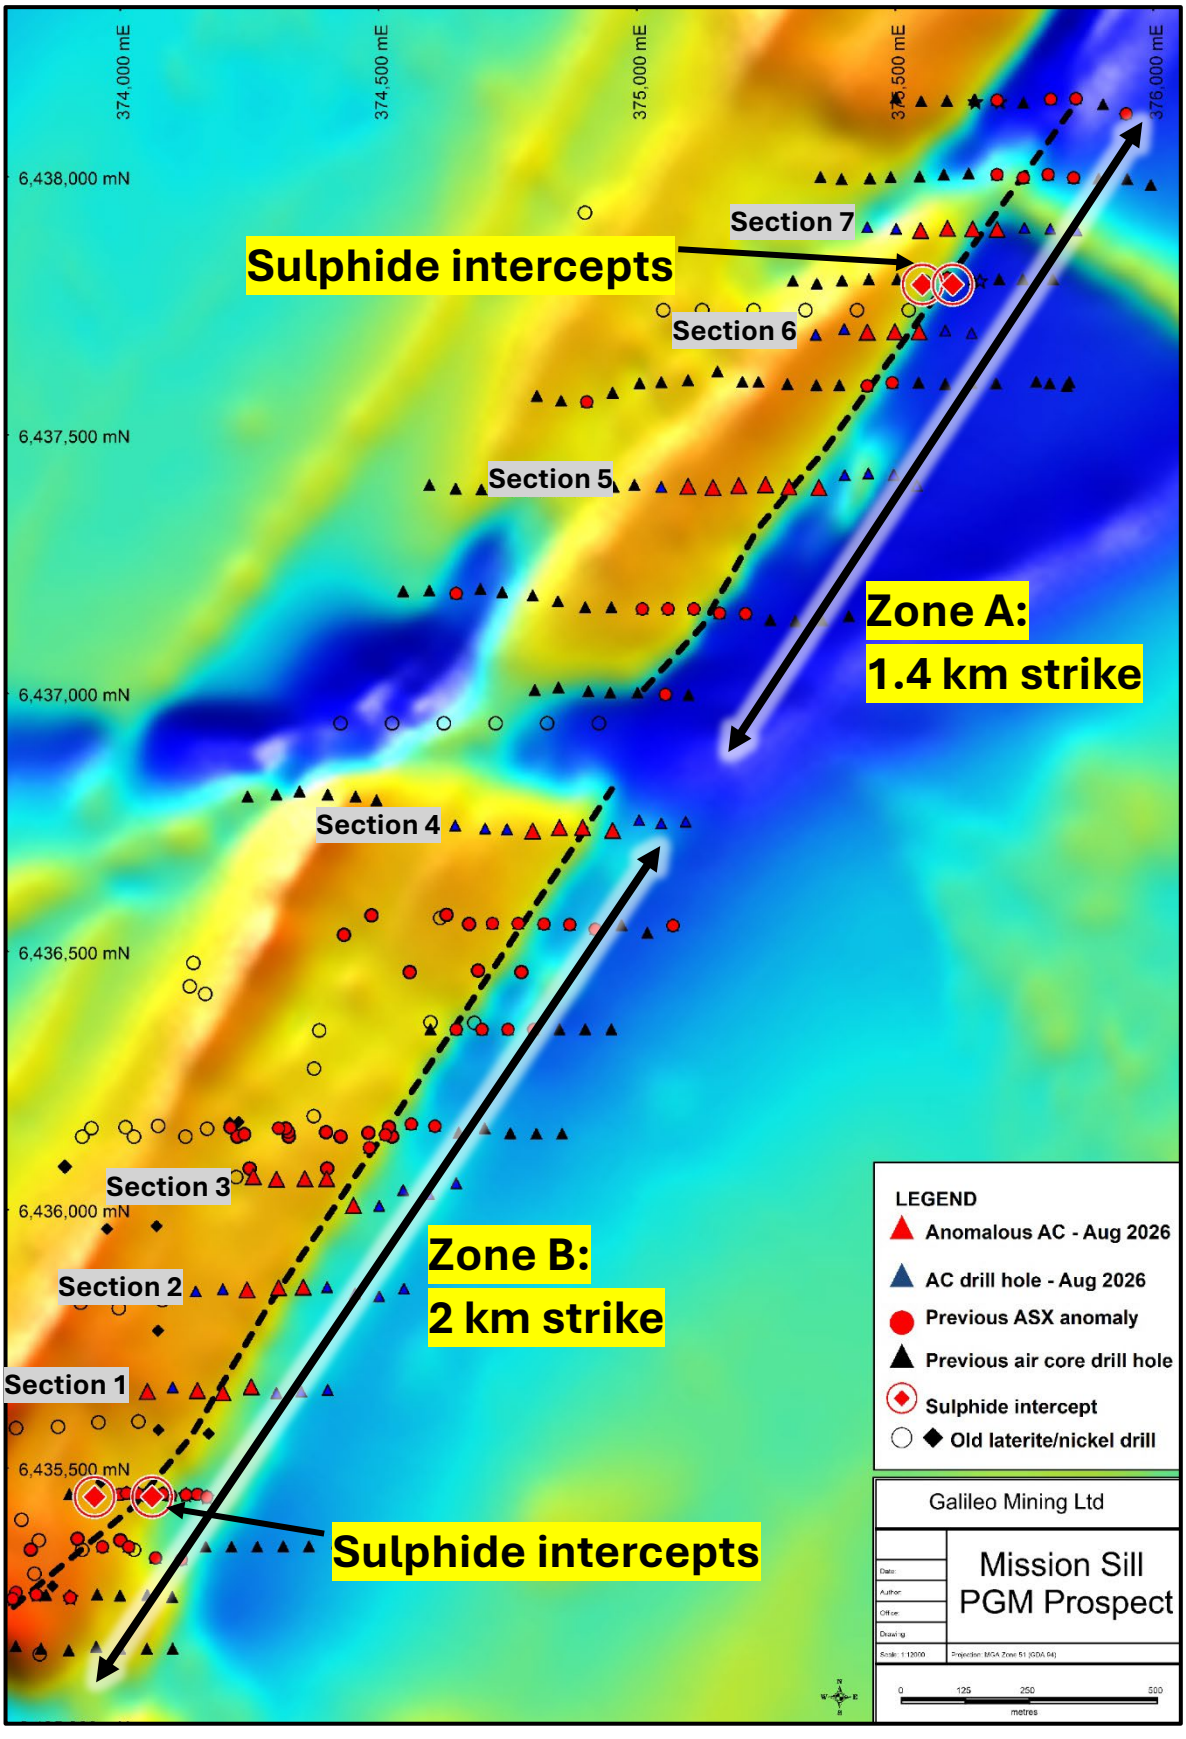


For personal use only

Figure 2 – Callisto South gold prospect with air core drilling (triangles), gold drill intersection, 10k mapped geology and interpreted shear zone. See Appendices for drilling details.

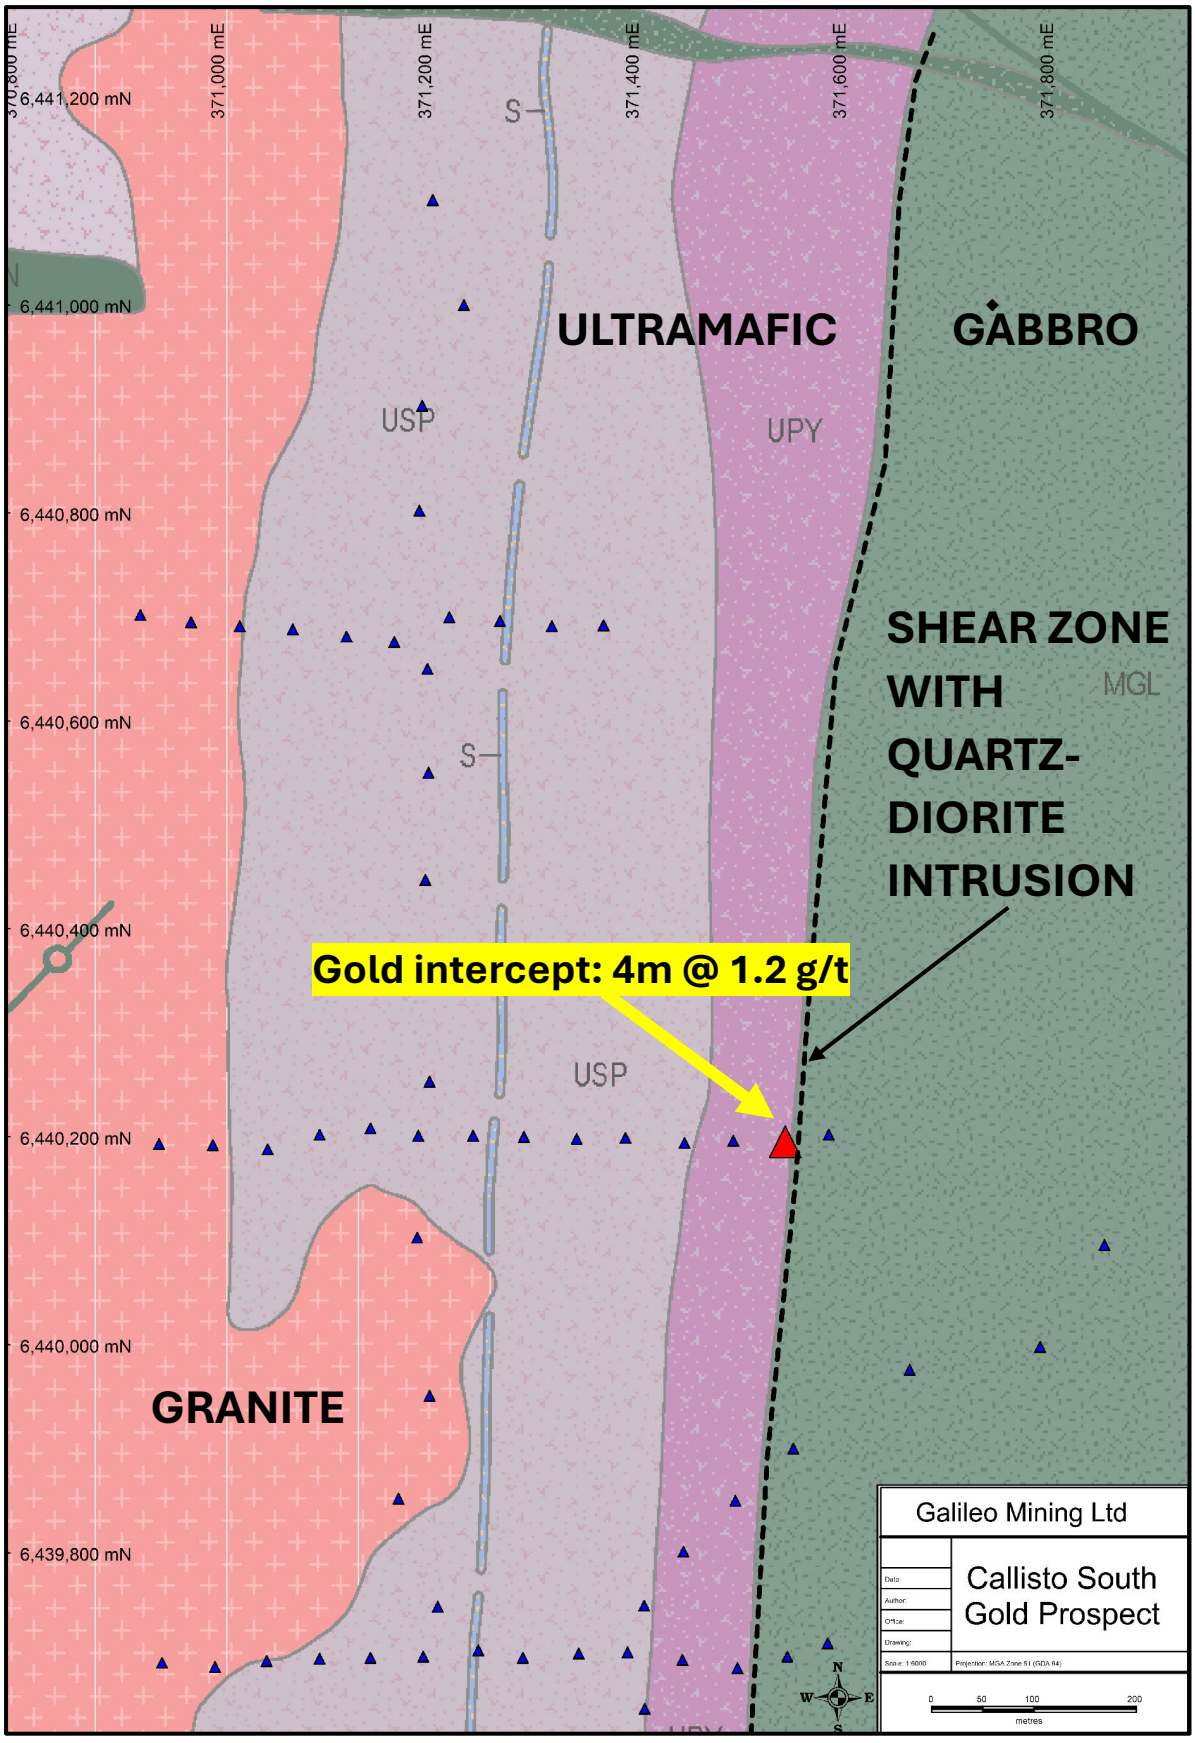


For personal use only

Figure 3 – Norseman Project outline (blue line) with gravity survey (black dashed line), Callisto Deposit (red star), and prospects requiring follow up drilling (grey stars). New gold prospect at Callisto South is shown by red ellipse.

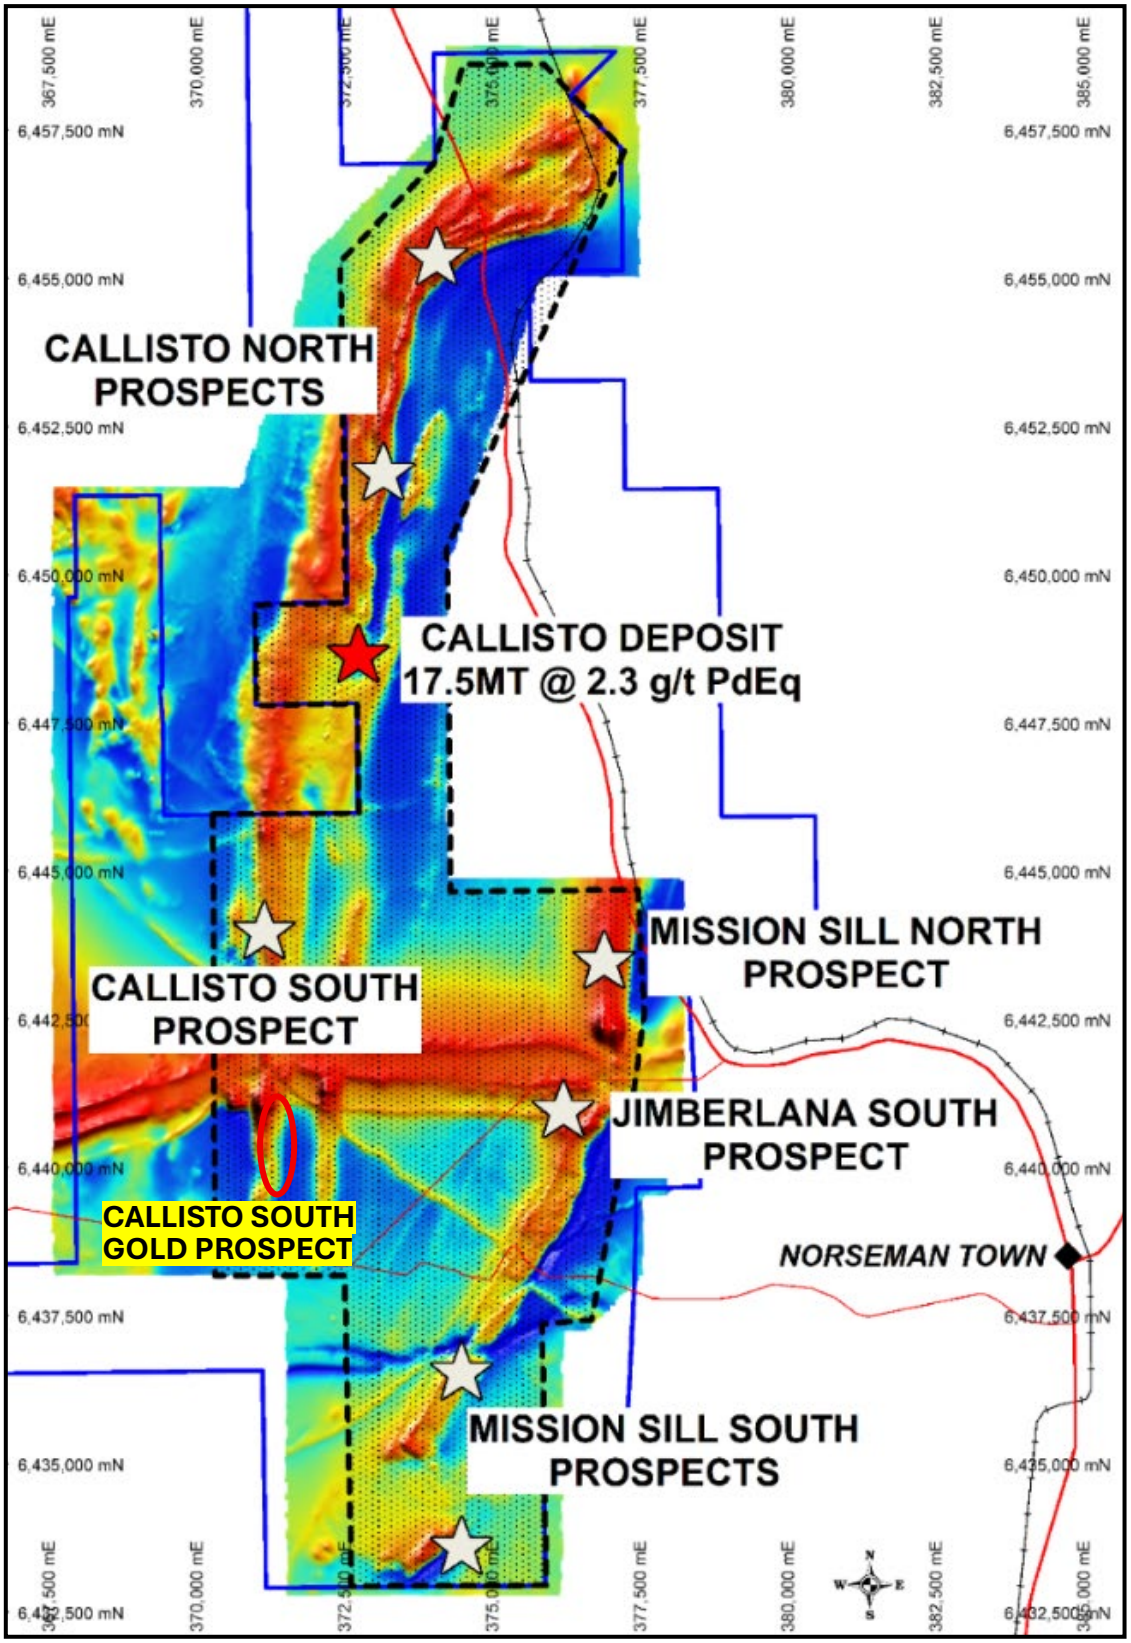


For personal use only

Figure 4 – Callisto deposit and prospective geological trends at Galileo's Norseman project.

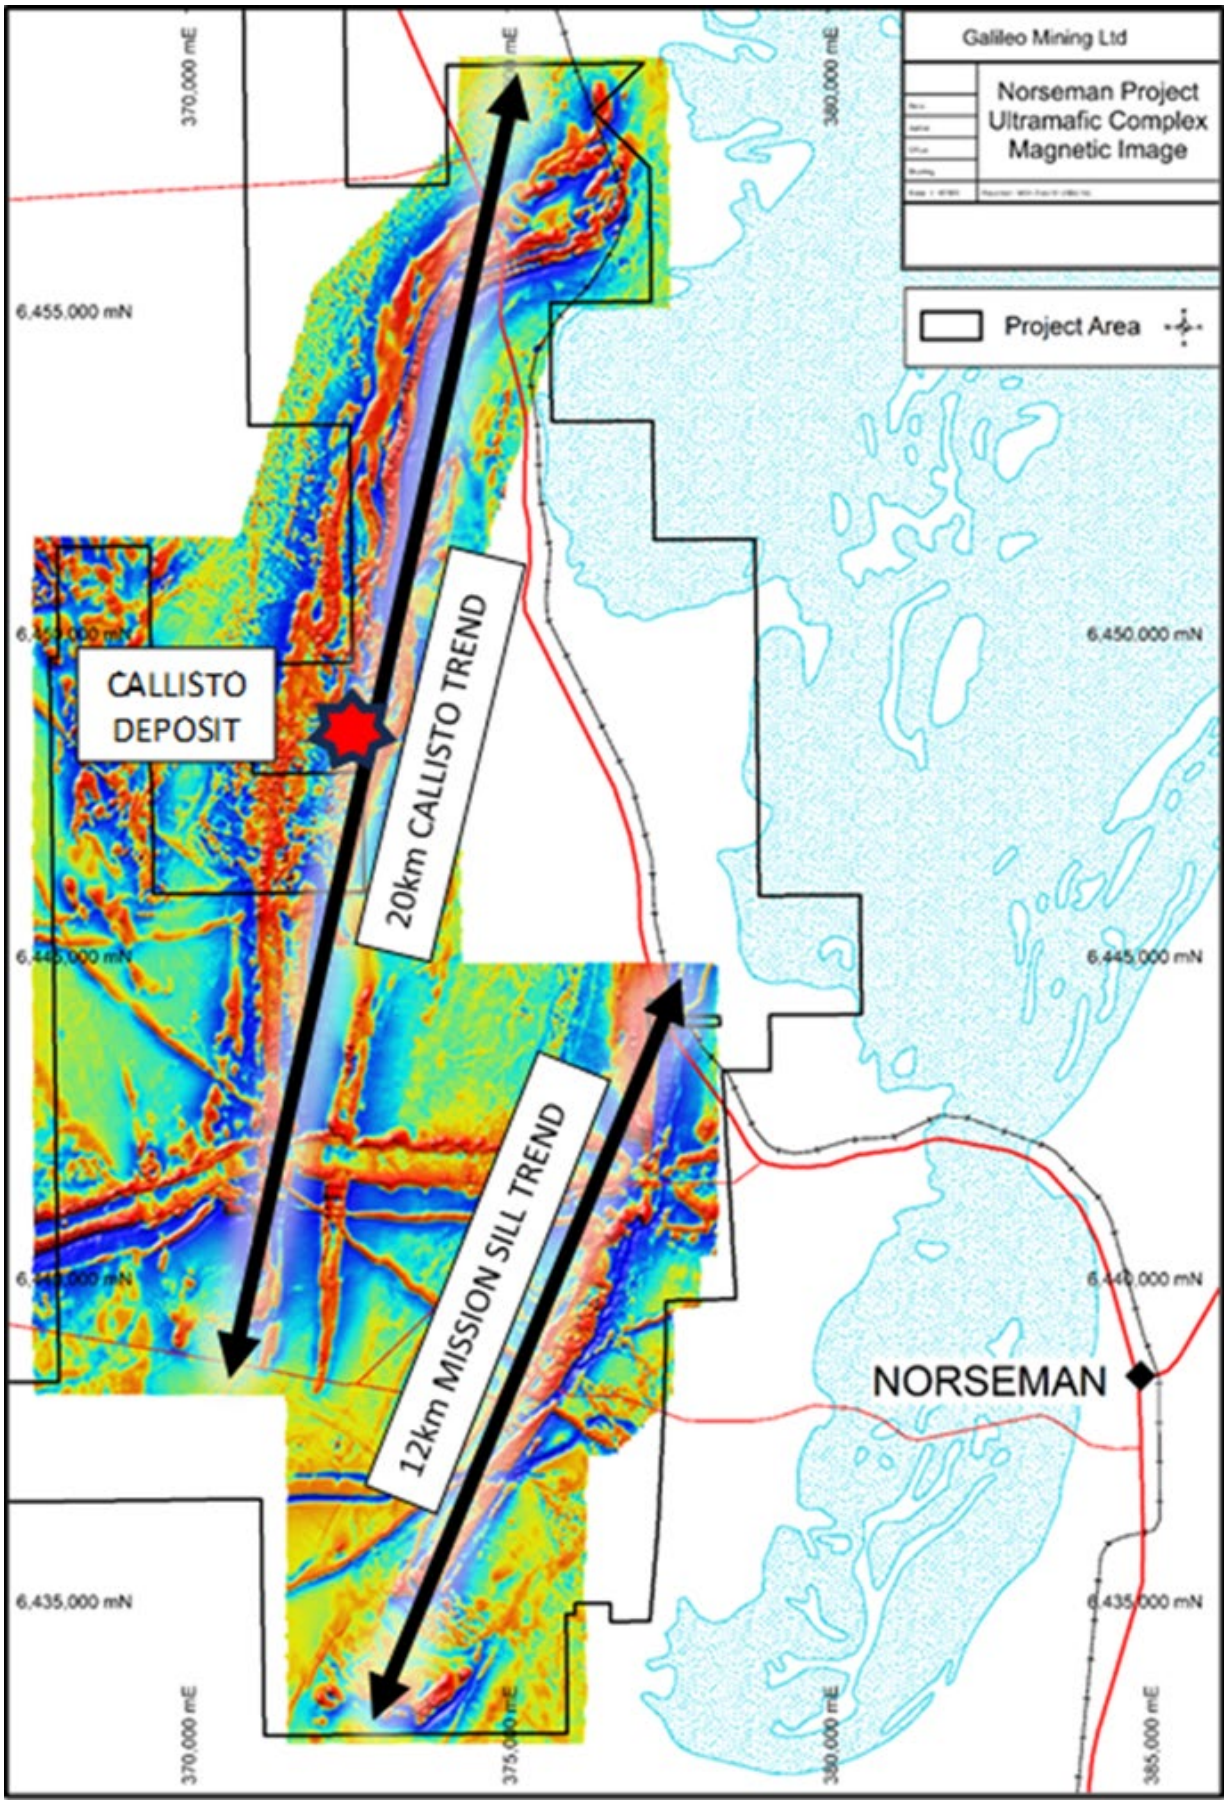

For personal use only

Figure 5 – Norseman project location map with a selection of mines, resources, and infrastructure in the region.

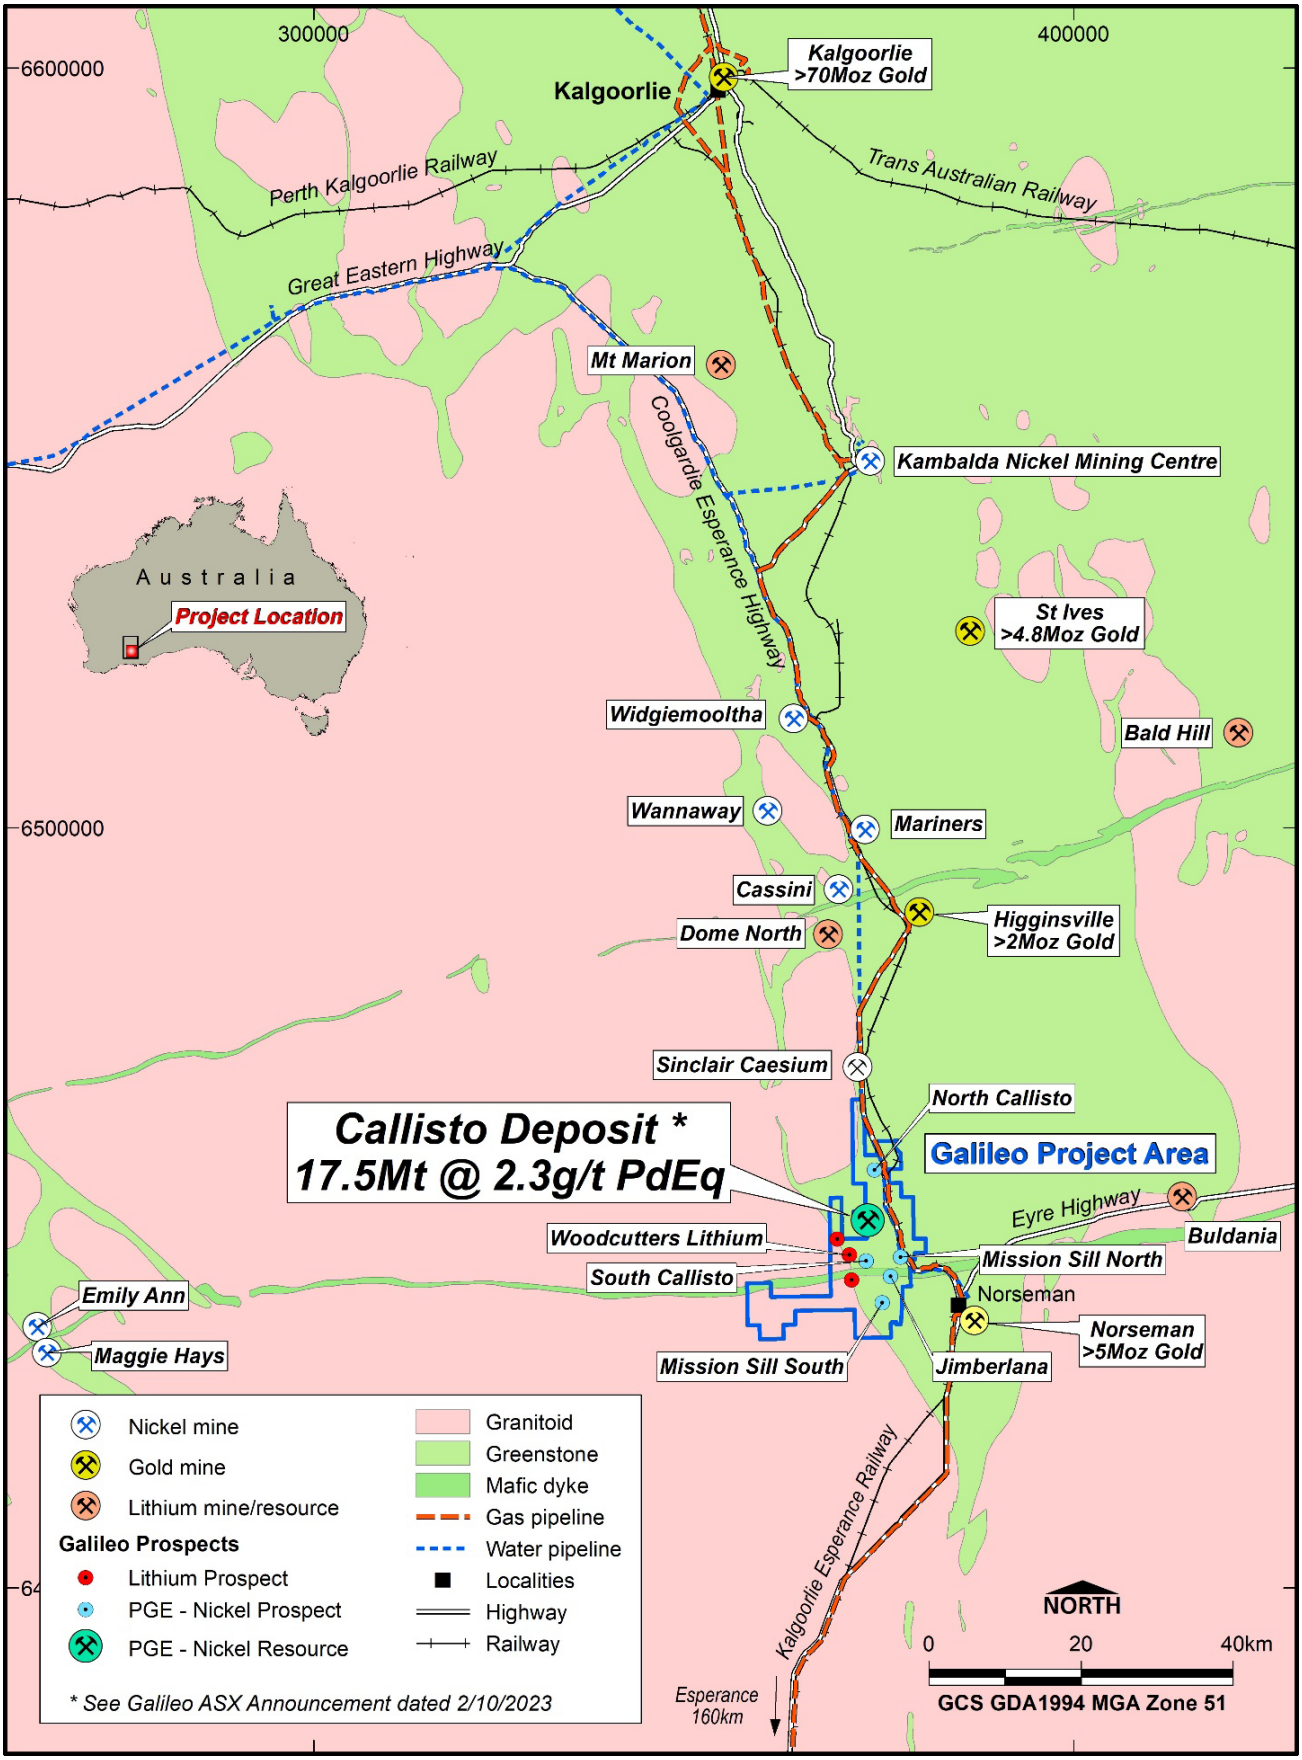

For personal use only

About Galileo Mining:

Galileo Mining Ltd (ASX: GAL) is focussed on the exploration and development of PGE (palladium-platinum), nickel, copper, and cobalt resources in Western Australia. GAL's tenements near Norseman are highly prospective for new discoveries as shown by the Callisto deposit. GAL also has Joint Ventures with the Creasy Group over tenements in the Fraser Range which are prospective for nickel-copper sulphide deposits similar to the operating Nova mine.

Norseman (100% GAL)

The wholly owned Norseman project contains the Callisto Discovery and adjacent regional prospects Jimberlana and Mission Sill with potential for palladium, platinum, nickel, copper, cobalt, and rhodium mineralisation. Galileo's tenure at Norseman comprises mining, exploration, and prospecting licenses covering a total area of 255 km^2.

The Callisto deposit was discovered in 2022 and is the first deposit of its type identified in Australia, analogous in mineralisation style to the Platreef deposits found in South Africa. An initial Mineral Resource Estimate was reported in 2023 with 17.5 Mt @ 1.04g/t 4E[3], 0.20% Ni, 0.16% Cu (2.3g/t PdEq[4] or 0.52% NiEq[5]).

Resource Table - Callisto Deposit Maiden Mineral Resource Estimate (JORC 2012) (see ASX announcement: 2 October 2023)

Reporting Criteria	JORC	Mass (Mt)	Grades									Metal accumulations								
			Pd (ppm)	Pt (ppm)	Au (ppm)	Rh (ppm)	Ni (%)	Cu (%)	PdEq (ppm)	NiEq (%)	4E (ppm)	Pd (Koz)	Pt (Koz)	Au (Koz)	Rh (Koz)	Ni (Kt)	Cu (Kt)	PdEq (Koz)	NiEq (Kt)	4E (Koz)
Above 60mRL and cut-off > 0.5g/t PdEq	Indicated	7.96	0.92	0.16	0.048	0.030	0.22	0.19	2.5	0.58	1.16	235.3	41.5	12.4	7.8	17.3	14.9	639	45.8	296.9
	Inferred	8.76	0.74	0.14	0.043	0.025	0.19	0.14	2.0	0.47	0.94	207.2	38.6	12.1	7.0	16.3	12.3	576	41.3	264.9
	Sub total	**16.72**	**0.82**	**0.15**	**0.046**	**0.027**	**0.20**	**0.16**	**2.3**	**0.52**	**1.04**	**442.5**	**80.1**	**24.5**	**14.8**	**33.6**	**27.1**	**1,216**	**87.1**	**561.8**
Below 60mRL and cut-off > 1.5g/t PdEq	Inferred	0.76	0.78	0.13	0.036	0.027	0.19	0.14	2.1	0.49	0.97	18.9	3.2	0.9	0.7	1.4	1.1	51	3.7	23.6
	Total	**17.48**	**0.82**	**0.15**	**0.045**	**0.027**	**0.20**	**0.16**	**2.3**	**0.52**	**1.04**	**461.4**	**83.3**	**25.3**	**15.4**	**35.0**	**28.2**	**1,267**	**91**	**585.4**

Metal equivalent price assumptions of Callisto Resource released on 2nd October 2023

Based on metallurgical test work completed to date, the Company believes that Callisto's mineralisation is amenable to concentration using a conventional crushing, milling and flotation process and has Reasonable Prospects for Eventual Economic Extraction.
Metallurgical recovery assumptions used for metal equivalent value calculations were: Pd – 82%, Pt – 78%, Au – 79%, Rh – 63%, Ni – 77%, Cu – 94%
Metal price assumptions, based on 12 month calculated averages to 11th September 2023, were used for metal equivalent values: Pd – US$1,600/oz, Pt – US$975/oz, Au – US$1,870/oz, Rh – US$9,420/oz, Ni - US23,800/t, Cu – US$8,420/t

Fraser Range (67% GAL / 33% Creasy Group JV)

Galileo is actively exploring for magmatic massive sulphide- nickel-copper deposits across its Fraser Range tenements covering over 600km^2 of highly prospective ground in the Albany-Fraser Orogen. The project is well positioned within the nickel-copper bearing Fraser Range Zone, with the Nova-Bollinger mine located between 30km and 90km from Galileo tenure.

[3] 4E = Palladium (Pd) + Platinum (Pt) + Gold (Au) + Rhodium (Rh) expressed in g/t
[4] PdEq (Palladium Equivalent) = Pd (g/t) + 0.580 x Pt (g/t) + 1.13 x Au (g/t) + 4.52 x Rh (g/t) + 4.34 x Ni (%) + 1.88 x Cu (%)
[5] NiEq (Nickel equivalent) = Ni % + 0.230 x Pd (g/t) + 0.133 x Pt (g/t) + 0.259 x Au (g/t) + 1.04 x Rh (g/t) + 0.432 x Cu (%)

Competent Person Statement

The information in this report that relates to Exploration Results is based on, and fairly represents, information and supporting documentation prepared by Mr Brad Underwood, a Member of the Australasian Institute of Mining and Metallurgy, and a full time employee of Galileo Mining Ltd. Mr Underwood has sufficient experience that is relevant to the styles of mineralisation and types of deposit under consideration, and to the activity being undertaken, to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves" (JORC Code). Mr Underwood consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

With regard to the Company's ASX Announcements referenced in the above Announcement, the Company is not aware of any new information or data that materially affects the information included in the Announcements.

Authorised for release by the Galileo Board of Directors.

Investor information: phone Galileo Mining on + 61 8 9463 0063 or email info@galmining.com.au

Media:
David Tasker
Chapter One Advisors
E: dtasker@chapteroneadvisors.com.au
T: +61 433 112 936

For personal use only

Appendix 1: Anomalous AC Drill Hole Intersections

>0.2g/t 3E cut-off over minimum two composite samples interval (ie. minimum 2 x 4m composite samples, or one 4m composite plus a 1m,2m or 3m composite, depending on end of hole depth), no internal dilution. Samples > 0.4 g/t 3E cut-off reported individually. Reported as downhole width, true width unknown. 3E = Palladium (Pd) + Platinum (Pt) + Gold (Au); expressed in g/t.

Hole ID	From (m)	To (m)	Interval (m)	3E (Pd+ Pt+ Au; g/t)	Palladium (g/t)	Platinum (g/t)	Gold (g/t)	Copper (%)	Nickel (%)
NAC823	**0**	**2**	**2**	**0.42**	**0.38**	**0.04**	**0.01**	**0.02**	**0.02**
NAC824	4	28	24	0.27	0.18	0.08	0.01	0.06	0.28
and	36	47	11	0.26	0.16	0.07	0.03	0.03	0.22
NAC825	0	36	36	0.24	0.15	0.09	<0.01	0.06	0.25
NAC827	12	24	12	0.23	0.12	0.11	<0.01	0.04	0.39
NAC828	0	8	8	0.27	0.15	0.11	<0.01	0.02	0.11
NAC832	**0**	**3**	**3**	**0.42**	**0.35**	**0.06**	**<0.01**	**0.05**	**0.08**
including	**2**	**3**	**1**	**0.52**	**0.44**	**0.08**	**<0.01**	**0.07**	**0.13**
NAC833	4	40	36	0.31	0.17	0.11	0.02	0.04	0.29
including	**4**	**8**	**4**	**0.50**	**0.26**	**0.23**	**<0.01**	**0.02**	**0.04**
and	**32**	**36**	**4**	**0.47**	**0.19**	**0.12**	**0.16**	**0.03**	**0.26**
NAC834	12	20	8	0.23	0.16	0.07	0.01	0.04	0.26
NAC838	0	16	16	0.33	0.21	0.11	0.01	0.05	0.21
NAC838	20	40	20	0.27	0.15	0.09	0.03	0.03	0.22
including	**20**	**24**	**4**	**0.45**	**0.24**	**0.15**	**0.06**	**0.04**	**0.24**
and	56	63	7	0.30	0.23	0.06	0.01	0.02	0.13
NAC839	0	28	28	0.29	0.18	0.10	0.01	0.06	0.29
including	**0**	**4**	**4**	**0.46**	**0.32**	**0.14**	**0.01**	**0.07**	**0.27**
NAC840	0	20	20	0.30	0.18	0.11	0.02	0.07	0.25
including	**0**	**4**	**4**	**0.56**	**0.35**	**0.19**	**0.02**	**0.06**	**0.23**
NAC841	**0**	**4**	**4**	**0.49**	**0.28**	**0.15**	**0.06**	**0.05**	**0.24**
NAC846	0	8	8	0.28	0.22	0.06	<0.01	0.05	0.10
NAC850	**0**	**5**	**5**	**0.54**	**0.46**	**0.07**	**0.01**	**0.03**	**0.03**
NAC851	0	24	24	0.28	0.18	0.09	<0.01	0.03	0.27
NAC851	28	44	16	0.30	0.18	0.11	0.01	0.03	0.28

For personal use only

For personal use only

Hole ID	From (m)	To (m)	Interval (m)	3E (Pd+ Pt+ Au; g/t)	Palladium (g/t)	Platinum (g/t)	Gold (g/t)	Copper (%)	Nickel (%)
including	**43**	**44**	**1**	**0.54**	**0.43**	**0.05**	**0.07**	**0.10**	**0.23**
NAC852	**16**	**24**	**8**	**0.40**	**0.23**	**0.16**	**0.01**	**0.06**	**0.16**
including	**16**	**20**	**4**	**0.43**	**0.23**	**0.18**	**0.01**	**0.08**	**0.17**
NAC853	0	8	8	0.24	0.18	0.06	0.01	0.04	0.10
NAC862	0	8	8	0.29	0.24	0.05	<0.01	0.04	0.08
NAC863	16	36	20	0.24	0.14	0.08	0.02	0.04	0.22
NAC863	48	50	2	0.33	0.25	0.06	0.02	0.03	0.12
NAC864	16	32	16	0.26	0.16	0.07	0.02	0.04	0.14
NAC864	47	48	1	0.22	0.17	0.05	0.01	0.02	0.12
NAC865	12	20	8	0.22	0.15	0.07	<0.01	0.02	0.15
NAC866	0	8	8	0.24	0.16	0.07	0.01	0.04	0.22
NAC866	36	44	8	0.25	0.12	0.12	0.02	0.08	0.14
NAC867	0	12	12	0.27	0.18	0.08	0.01	0.03	0.30
NAC871	0	5	5	0.29	0.22	0.05	0.02	0.03	0.09
including	**4**	**5**	**1**	**0.43**	**0.33**	**0.09**	**0.01**	**0.04**	**0.10**
NAC872	4	12	8	0.22	0.14	0.07	0.00	0.03	0.17
NAC873	53	54	1	0.21	0.14	0.03	0.04	0.10	0.09
NAC879	**0**	**4**	**4**	**0.57**	**0.47**	**0.09**	**0.02**	**0.03**	**0.05**
NAC880	4	12	8	0.28	0.18	0.09	0.01	0.05	0.26
NAC881	44	47	3	0.23	0.19	0.03	0.01	0.01	0.10
NAC882	16	24	8	0.28	0.12	0.12	0.04	0.06	0.11
NAC916	**0**	**4**	**4**	**1.25**	**0.02**	**0.01**	**1.22**	**0.02**	**0.01**

Anomalous gold in aircore drilling (1 g/t Au cut-off)

Hole ID	From (m)	To (m)	Interval (m)	Gold (g/t)	Silver (g/t)	Sulphur (%)	Iron (%)	Magnesium (%)
NAC916	**0**	**4**	**4**	**1.22**	**0.33**	**0.37**	**5.63**	**1.64**

For personal use only

Appendix 2: Reported Drill Hole Collar Details


Hole ID	East	North	RL	Azimuth	Dip	Total Depth (m)
NAC823	374253	6435657	338	90	-60	3
NAC824	374198	6435646	333	90	-60	47
NAC825	374149	6435650	329	90	-60	43
NAC827	374052	6435648	325	90	-60	44
NAC828	373992	6435647	322	90	-60	36
NAC832	374354	6435850	348	90	-60	3
NAC833	374306	6435849	342	90	-60	50
NAC834	374245	6435845	338	90	-60	47
NAC838	374399	6436060	353	90	-60	64
NAC839	374357	6436060	347	90	-60	55
NAC840	374302	6436059	341	90	-60	56
NAC841	374257	6436064	338	90	-60	52
NAC846	374451	6436008	356	90	-60	8
NAC850	374953	6436734	360	90	-60	6
NAC851	374895	6436740	352	90	-60	44
NAC852	374850	6436740	348	90	-60	32
NAC853	374798	6436733	345	90	-60	30
NAC862	375352	6437398	359	90	-60	9
NAC863	375294	6437399	358	90	-60	50
NAC864	375249	6437404	357	90	-60	48
NAC865	375197	6437402	354	90	-60	51
NAC866	375147	6437398	351	90	-60	72
NAC867	375099	6437400	350	90	-60	66
NAC871	375546	6437700	345	90	-60	6
NAC872	375499	6437700	343	90	-60	69
NAC873	375446	6437699	342	90	-60	54
NAC879	375697	6437898	331	90	-60	6
NAC880	375650	6437899	332	90	-60	39
NAC881	375601	6437900	332	90	-60	48
NAC882	375549	6437896	333	90	-60	54
NAC916	371550	6440195	373	270	-60	12

Note: Easting and Northing coordinates are MGA94 Zone 51.


For personal use only

Appendix 3: Drill Sections with Anomalous Results (see Figures 1 & 2 for plan view and other Appendices for drill hole details)

Section 1: 6,435,650N

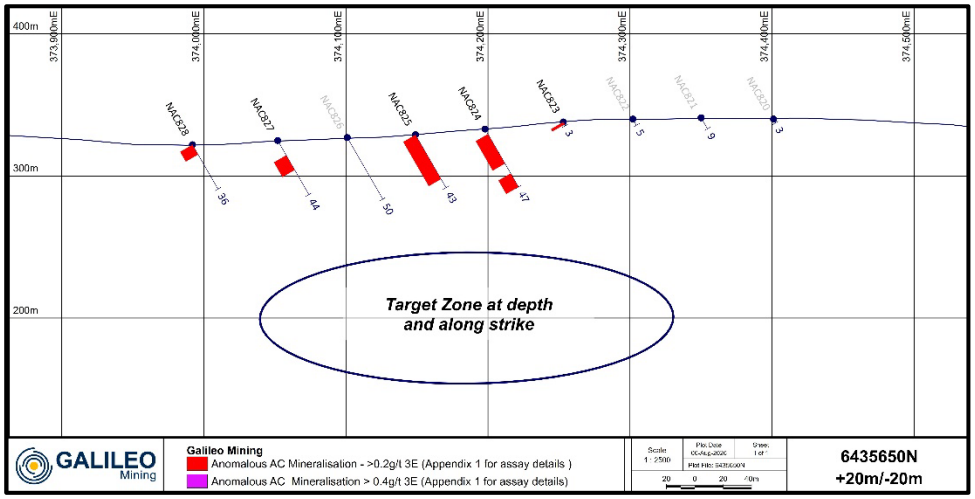


Section 2: 6,435,850N

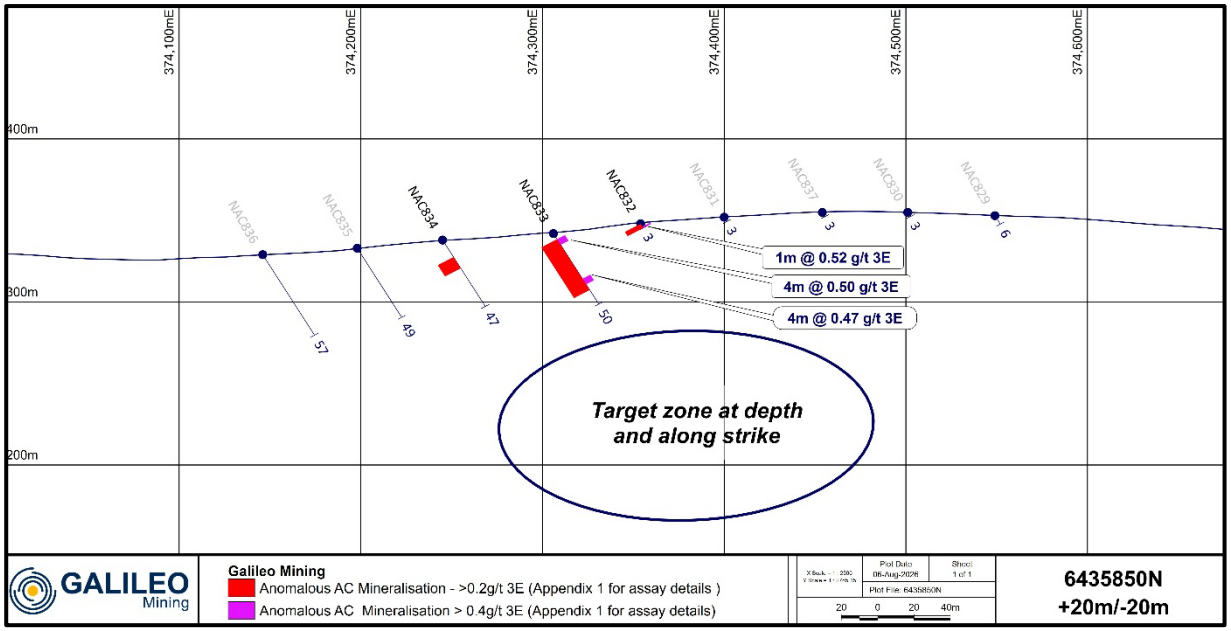


For personal use only

Section 3: 6,436,050N

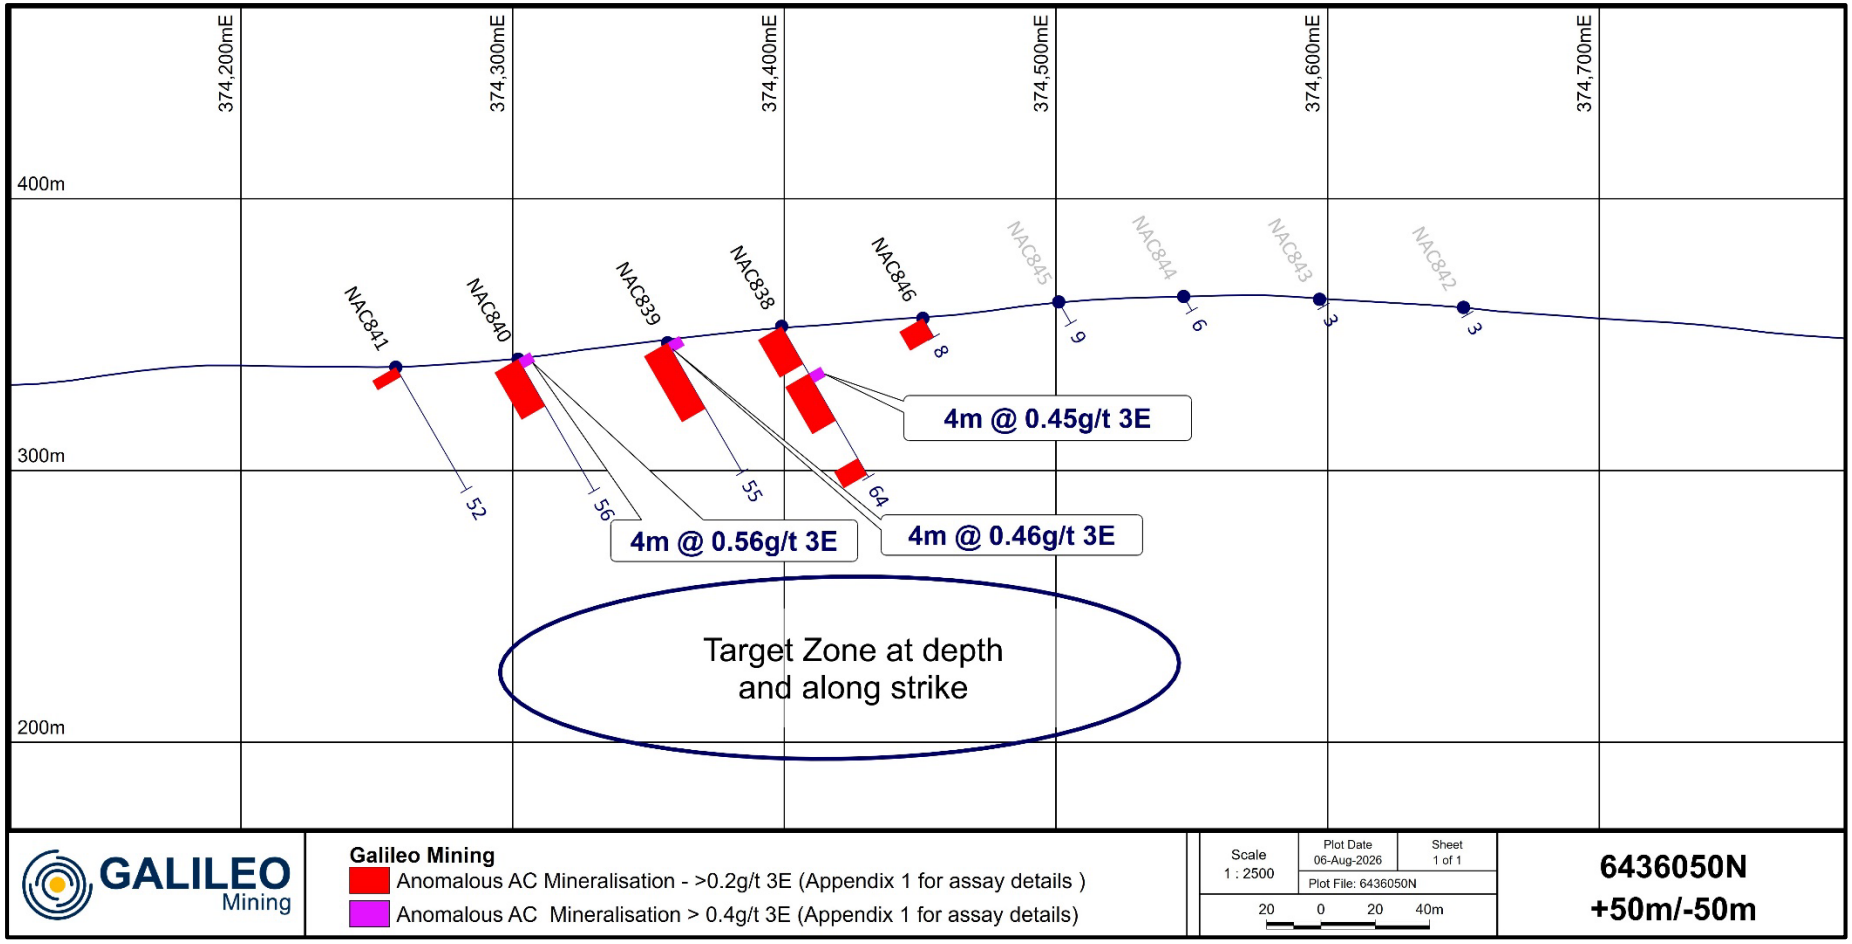


For personal use only

Section 4: 6,436,750N

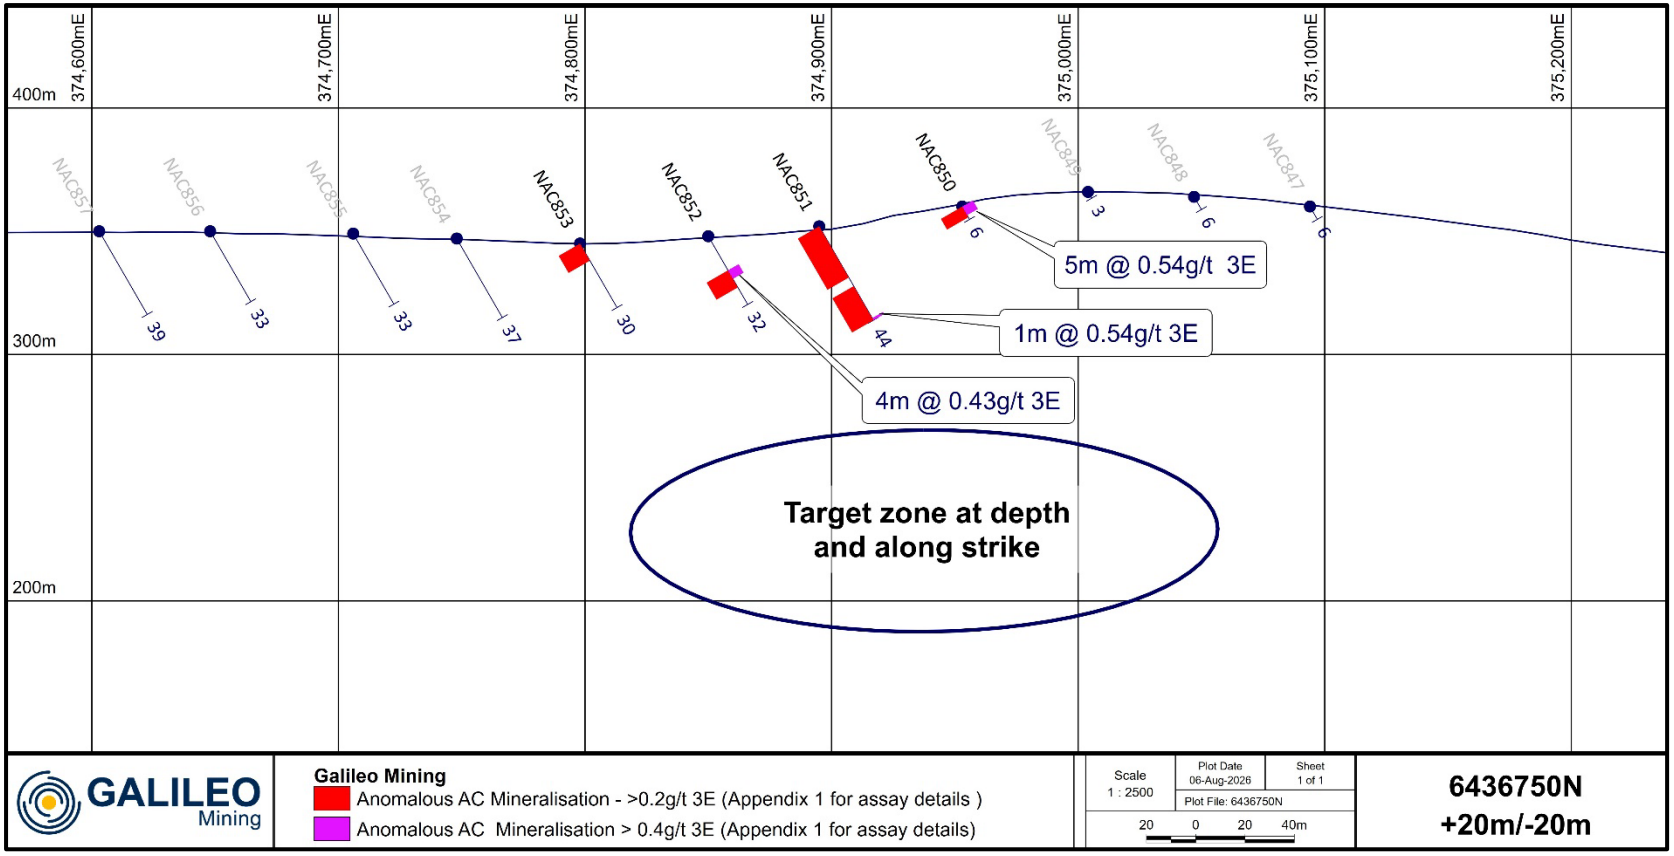


For personal use only

Section 5: 6,437,400N

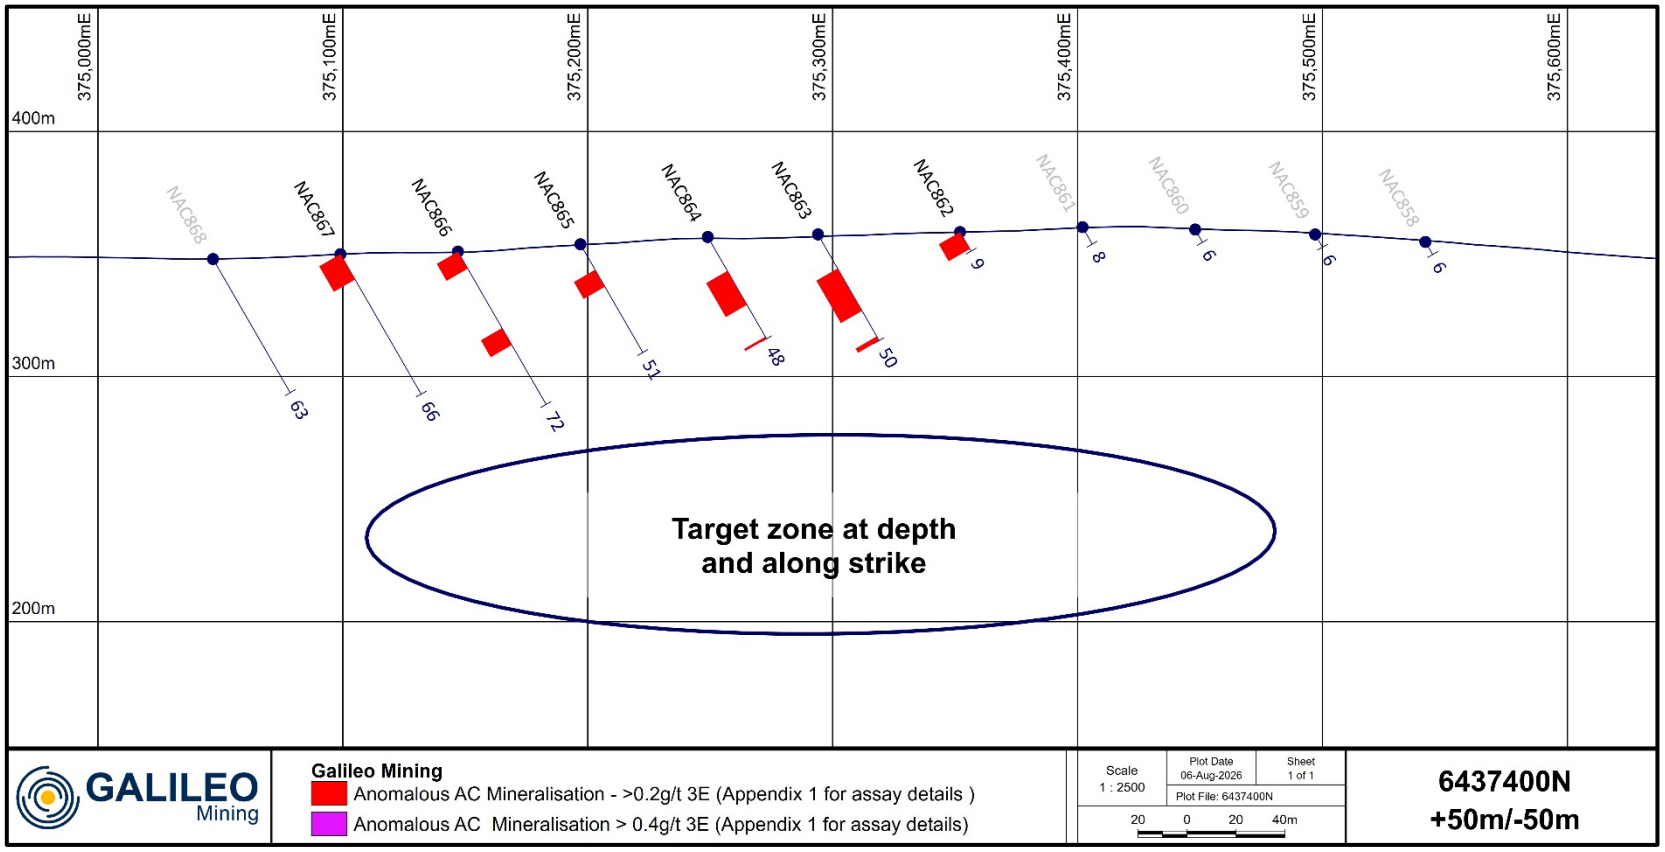


For personal use only

Section 6: 6,437,700N

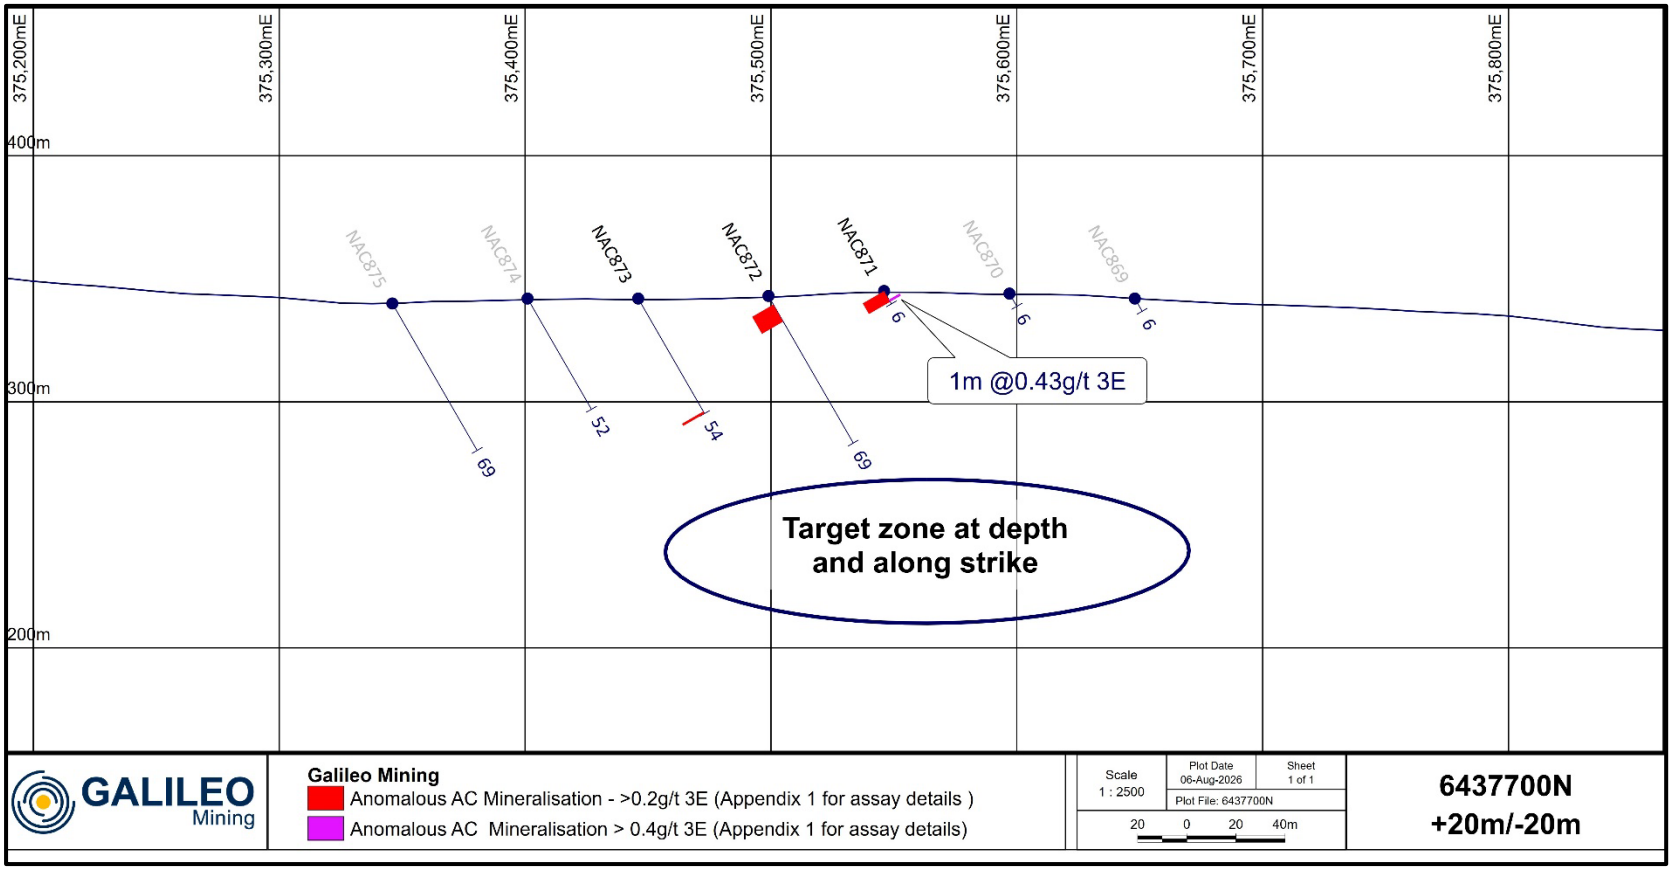


For personal use only

Section 7: 6,437,900N

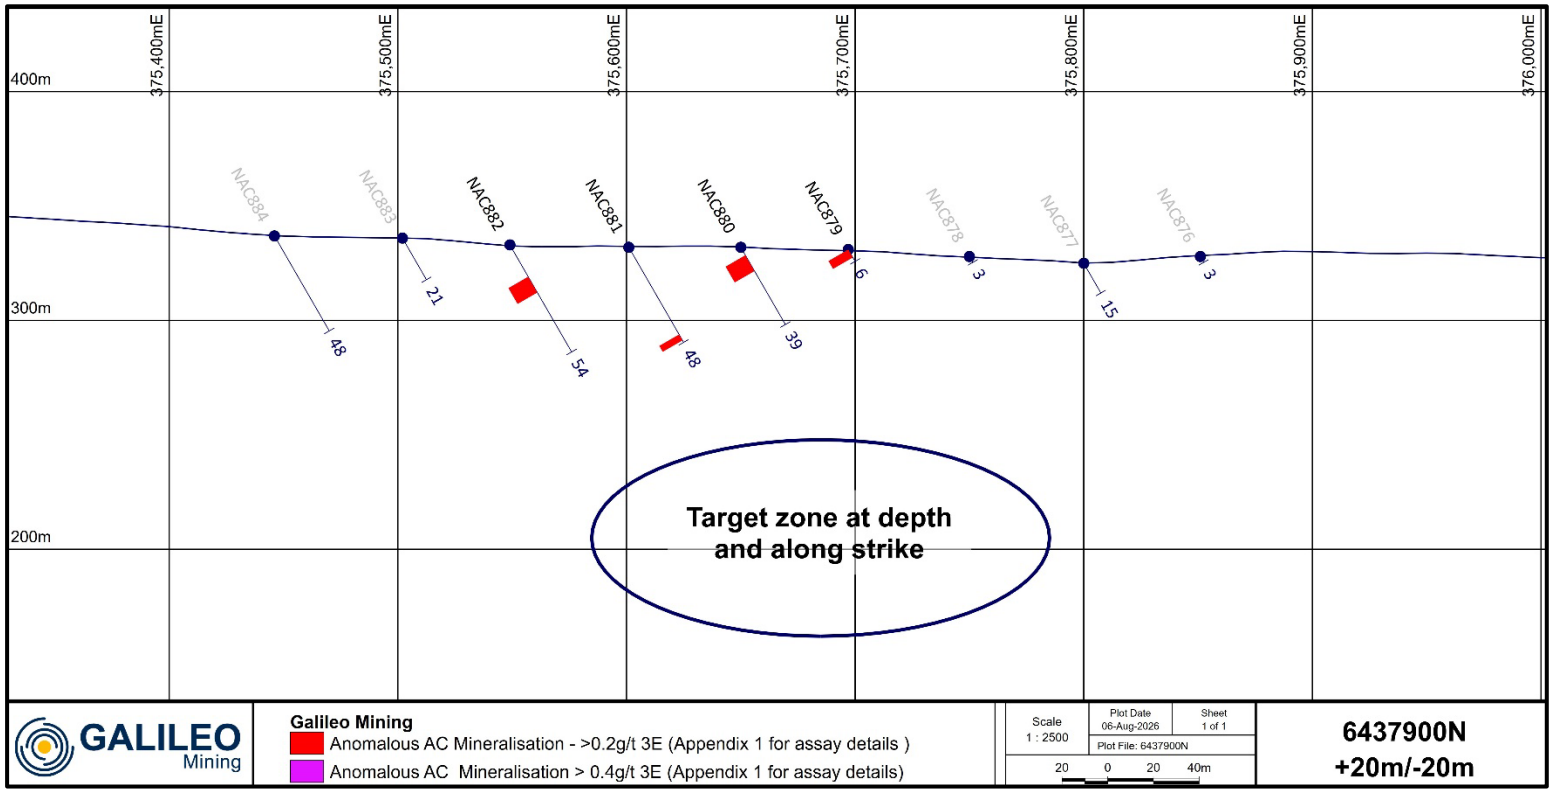

For personal use only

Callisto South Section: 6,440,200N

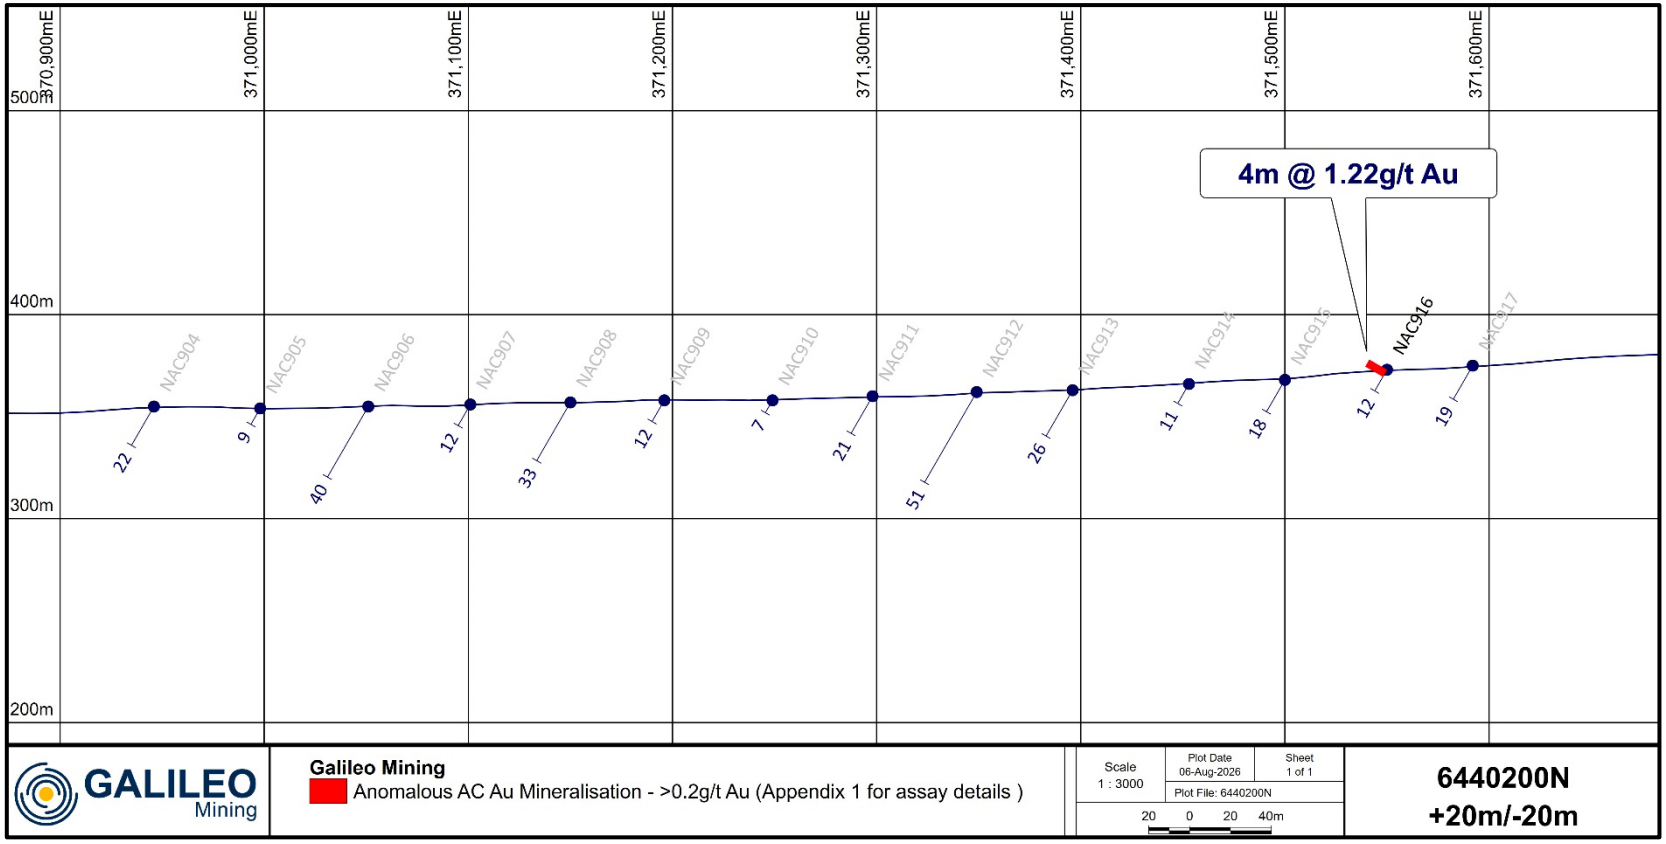

For personal use only

Appendix 4:

Galileo Mining Ltd – Norseman Project

JORC Code, 2012 Edition – Table 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	• *Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.* • *Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.* • *Aspects of the determination of mineralisation that are Material to the Public Report.* • *In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.*	• Aircore drilling was completed on traverses testing geological targets based on aeromagnetic interpretation, surface geochemistry, historic drilling and/or geological interpretation. • Drill cuttings representative of each 1m down hole interval of sample return were collected direct from the drill rig sample return system (cyclone) into a 20-litre plastic bucket and ground dumped in rows. • Each 1m sample pile from every drill hole was spear sampled to obtain representative nominal 4m composite samples for laboratory analysis. 1m, 2m or 3m composite samples were collected from the end of hole where the drill hole depth was not a multiple of four. A 1m bottom of hole sub-sample was also collected for laboratory analysis. • Sub-sample composite weights were in the range 2-3kg. • Bottom of hole sample weights were approximately 1kg • Certified QAQC standards (blank & reference) and field duplicate samples were included routinely with 1 per 50 primary sub samples being a certified standard, blank or a field duplicate. • Samples have been submitted to an independent commercial assay laboratory.
Drilling techniques	• *Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).*	• The Aircore drilling method was used with an 85mm blade bit. • KTE Mining was the drilling contractor for the program utilising a KL150 model rig.
Drill sample recovery	• *Method of recording and assessing core and chip sample recoveries and results assessed.* • *Measures taken to maximise sample recovery and ensure representative nature of the samples.* • *Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain*	• Sample recoveries are visually estimated for each metre by the geologist supervising the drilling. Poor or wet samples are recorded in the drill and sample log sheets. • The sample cyclone was routinely cleaned between holes and when deemed necessary within the hole.

For personal use only

Criteria	JORC Code explanation	Commentary
	of fine/coarse material.	• No relationship has been determined between sample recovery and geology/grade and there is insufficient data to determine if there is a sample bias.
Logging	• *Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.* • *Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.* • *The total length and percentage of the relevant intersections logged.*	• Geological logging of drill holes was done on a visual basis. • Logging of drill chips is semi-quantitative and based on the presentation of representative drill chips retained for all 1m sample intervals in the chip trays.
Sub-sampling techniques and sample preparation	• *If core, whether cut or sawn and whether quarter, half or all core taken.* • *If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.* • *For all sample types, the nature, quality and appropriateness of the sample preparation technique.* • *Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.* • *Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.* • *Whether sample sizes are appropriate to the grain size of the material being sampled.*	• All Aircore drill samples were collected using a PVC spear as 4m composites (2-3kg). Other composites of 3m, 2m and 1m were collected where required ie, at the bottom of hole or through zones of interest as identified by the geologist supervising the program. A specific 1m bottom of hole sub-sample was also collected by PVC Spear or Scoop (1-2kg). • QAQC reference samples and duplicates were routinely submitted with each batch. • The sample size is considered appropriate for the mineralisation style, application and analytical techniques used.
Quality of assay data and laboratory tests	• *The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.* • *For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.* • *Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.*	• AC Chip samples were analysed for a multielement suite (52 elements) by ICP-MS following an aqua regia digest of a 10g sample pulp charge. The assay methods used are considered appropriate. • Au, Pd & Pt results which were overrange for the Aqua Regia method were further analysed with a 25g fire assay for quantitative determination of assay results • QAQC standards and duplicates were routinely included at a rate of 1 per 50 samples • Further internal laboratory QAQC procedures included internal batch standards and blanks • Sample preparation was completed at Intertek Genalysis Laboratory, (Kalgoorlie or Perth) with digest and assay conducted by Intertek-Genalysis Laboratory Services (Perth).

For personal use only

Criteria	JORC Code explanation	Commentary
Verification of sampling and assaying	• *The verification of significant intersections by either independent or alternative company personnel.* • *The use of twinned holes.* • *Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.* • *Discuss any adjustment to assay data.*	• Field data is collected on site using a standard set of logging templates entered directly into a laptop computer. Data is then sent to the Galileo database manager for validation and upload into the database. • Assays are as reported from the laboratory and stored in the Company database and have not been adjusted in any way.
Location of data points	• *Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.* • *Specification of the grid system used.* • *Quality and adequacy of topographic control.*	• Drill hole collars are surveyed with a handheld GPS with an accuracy of +/- 5m which is considered sufficient for drill hole location accuracy. • Co-ordinates are in GDA94 datum, Zone 51. • Downhole depths are in metres measured downhole from the collar location on surface. • Topographic control has an accuracy of 2m based on detailed satellite imagery derived DTM or on laser altimeter data collected from aeromagnetic surveys
Data spacing and distribution	• *Data spacing for reporting of Exploration Results.* • *Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.* • *Whether sample compositing has been applied.*	• Aircore drill traverse spacing is not regular, the holes being placed to provide a systematic traverse pattern coverage of the geological/ geophysical/geochemical target area of interest. • Drill spacing along traverses has been at selective 50m intervals specific to the target zone and ongoing observations from the geologist during the drilling program. This spacing has been deemed adequate for first pass assessment only and is not considered sufficient to determine JORC Compliant Inferred Resources and therefore laboratory assay results and additional drilling would be required. • Drill holes were sampled from surface on a 4m composite basis or as 1m, 2m, or 3m samples as determined by the end of hole depth or under instruction from the geologist supervising the program. A 1m sub-sample from end of hole has also been collected.
Orientation of data in relation to	• *Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.* • *If the relationship between the drilling*	• All holes are inclined at 60 degrees. • It is unknown whether the orientation of sampling achieves unbiased sampling of possible structures as the target setting is hosted in soft regolith

Criteria	JORC Code explanation	Commentary
geological structure	*orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.*	material with no measurable structures recorded in drill chips. • No quantitative measurements of mineralised zones/structures exist, and all drill intercepts are reported as down hole length, true width unknown. Blade refusal depth of the drill rig will vary due to rock type, structure and alteration intersected as well as in-hole drilling conditions.
Sample security	• *The measures taken to ensure sample security.*	• Each sample was put into a tied off calico bag and then several placed in large plastic "polyweave" bags which were zip tied closed. • Samples were delivered directly to the laboratory in Kalgoorlie by Galileo staff.
Audits or reviews	• *The results of any audits or reviews of sampling techniques and data.*	• Continuous improvement internal reviews of sampling techniques and procedures are ongoing. No external audits have been performed.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	• *Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.* • *The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.*	• The Norseman Project comprises two mining leases, four exploration licenses, and eighteen prospecting covering 251km^2 of contiguous tenure • All tenements within the Norseman Project are 100% owned by Galileo Mining Ltd. • A 1% Net Smelter Royalty is payable to Australian Gold Resources Pty Ltd on mine production from within the Norseman Project (NSR does not apply to production from any laterite operations) • The Norseman Project is centred around a location approximately 10km north-west of Norseman on vacant crown land. • The Callisto South gold prospect occurs within Proposed State Forest 6 (PSF6). Exploration in this area is conducted under Galileo's Exploration Environmental Management Plan (EEMP) as approved by the DMPE. • All tenements in the Norseman Project are 100% covered by the Ngadju Native Title Determined Claim. • The tenements are in good standing and there are no known impediments.

For personal use only

For personal use only

Criteria	JORC Code explanation	Commentary
Exploration done by other parties	• *Acknowledgment and appraisal of exploration by other parties.*	Between the mid-1960's and 2000 exploration was conducted in the area for gold and base-metals (most notably Ni sulphides). Exploration focussed on the Mt Thirsty Sill and eastern limb of the Mission Sill. Central Norseman Gold Corporation/WMC (1966-1972) • Explored the Jimberlana Dyke for Ni-Cu-PGE-Cr. Soil sampling generated several Cu anomalies 160-320ppm Cu. Barrier Exploration and Jimberlana Minerals Between (1968 and 1974) • Explored immediately south of Mt Thirsty for Ni-Cu sulphide. IP, Ground Magnetic Surveys, Soil Sampling, Soil Auger Sampling and Diamond Drilling was completed. Resolute Limited, Great Southern Mines Ltd and Dundas Mining Pty Ltd (1993-1996) • Gold focussed exploration. Several gold anomalies were identified in soil geochemistry but were not followed up. Resolute assayed for Au, Ni, Cu, Zn but did not assay for PGE. • Resolute Limited drilled laterite regolith profiles over the ultramafic portions of the Mt Thirsty Sill and identified a small Ni-Co Resource with high Co grades. Kinross Gold Corp Australia (1999) • Completed a 50m line spaced aeromagnetic survey. 2000-2004 • Australian Gold Resources ("AGR") held "Mt Thirsty Project" from 2000 to 30th June 2004. Works identified Ni-Co resources on the Project. • Anaconda Nickel Ltd ("ANL") explored AGR Mt Thirsty Project as part of the AGR/ANL Exploration Access Agreement 2000-2001. AGR/ANL (2000-2001) • Mapping focussed on identifying Co-Ni enriched regolith areas. • RC on 800mx100m grid at Mission Sill targeting Ni-Co Laterite (MTRC001-MTRC035). Nickel assay maximum of 0.50%, Co 0.16%, Cu to 0.23%. • Concluded the anomalous Cu-PGE

For personal use only

Criteria	JORC Code explanation	Commentary
		association suggested affinity with Bushveldt or Stillwater style PGE mineralisation. A lack of an arsenic correlation cited as support for magmatic rather than hydrothermal PGE source. AGR (2003-2004) • Soil sampling over the Mission Sill and Jimberlana Dyke. • RC drilling (MTRC036-052) confirmed shallow PGE anomalism with best results of 1m at 2.04 combined Pt-Pd in MTRC038 from surface. • Petrography identified sulphide textures indicative of primary magmatic character. • Sixty samples were re-assayed for PGE when assays returned >0.05% Cu. A further 230 samples were re-assayed based on the initial Au-Pd-Pt results. The best combined result for Au-Pd-Pt was 5.7g/t. Galileo • Galileo commenced exploration on the Norseman Project from 30th June 2004 after sale of the tenements by AGR.
Geology	• *Deposit type, geological setting and style of mineralisation.*	• The Norseman target geology and mineralisation style is PGE-nickel-copper mineralisation related to layered intrusions (sills and dykes) and komatiite nickel sulphide mineralisation occurring within the GSWA mapped Mount Kirk Formation (and intrusions into this formation) • The Mount Kirk formation is described as “Acid and basic volcanic rocks and sedimentary rocks, intruded by basic and ultrabasic rocks”

Drill hole Information	• *A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:*
	  ○ *easting and northing of the drill hole collar*
	  ○ *elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar*
	  ○ *dip and azimuth of the hole*
	  ○ *down hole length and interception depth*
	  ○ *hole length.*
	• *If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.*
		• Refer to Appendices 1and 2.

For personal use only

Criteria	JORC Code explanation	Commentary
Data aggregation methods	• *In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.* • *Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.* • *The assumptions used for any reporting of metal equivalent values should be clearly stated.*	• Tables of relevant assay intervals of significance are included in previous releases. • Parts-per-billion and parts-per-million data reported from the assay laboratory have been converted to grams-per-tonne for Au, Pd, Pt. • Parts-per-million data reported from the assay laboratory for Cu and Ni have been converted to percent values and reported as percent values rounded to 2 decimal places. 3E intercepts have been calculated as the sum of Au, Pd and Pt assays in grams-per-tonne.
Relationship between mineralisation widths and intercept lengths	• *These relationships are particularly important in the reporting of Exploration Results.* • *If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.* • *If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').*	• The drilling is oriented perpendicular to the lithological strike and dip of the target rock unit • It is unknown whether the orientation of sampling achieves unbiased sampling of possible structures as no measurable structures are recorded in drill chips. • No quantitative measurements of mineralised zones/structures exist, and all drill intercepts are reported as down hole length in metres, true width unknown.
Diagrams	• *Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.*	• Project location map and plan map of the drill hole locations with respect to each other and with respect to other available data are included in the text. • Drill hole locations have been determined with hand-held GPS drill hole collar location (Garmin GPS 78s) +/- 5m in X/Y/Z dimensions
Balanced reporting	• *Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.*	• All available relevant information is presented.
Other substantive exploration data	• *Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.*	• Detailed 50m line spaced aeromagnetic data has been used for interpretation of underlying geology. Data was collected by Magspec Airborne Surveys Pty Ltd using a Geometrics G-823 caesium vapor magnetometer at an average flying height of 30m. • 28 lines (for 657 stations) of 200m or 400m line x 100m station spaced Moving Loop Electromagnetic survey data was collected over the prospect using a 200m loop. Data was collected using a Smartem receiver and Fluxgate

For personal use only

Criteria	JORC Code explanation	Commentary
		receiver coil at base frequencies of 1.0Hz to 0.25Hz and 28-30 Amp current. Two conductor plates were modelled. Based on the available drill logs these conductors appear to represent the position of sulphide rich sediment beneath the target mafic-ultramafic intrusion. • Consultants from Omni GeoX delineated the layered units within the sill using geochemical relationships identified by K-means cluster analysis and manual geochemical interpretive workflows. • Pole-Dipole Induced Polarisation (IP) survey data was collected using a pole-dipole array with a SMARTem 16 channel 24-bit receiver system (EMIT). A Search-Ex WB50 50KVA transmitter was utilised with a 100m receiver spacing. • Dipole-Dipole Induced Polarisation (IP) survey data was collected using a dipole-dipole array with a SMARTem 16 channel 24-bit receiver system (EMIT). A Search-Ex WB50 50KVA transmitter was utilised with a 50m receiver spacing. • Modelling and interpretation of IP survey geophysical data was undertaken by Terra Resources • Mapping of the Norseman Project Area prospective for PGE-nickel was undertaken at a 1:10,000 scale by Model Earth Pty Ltd • Consultants from Omni GeoX undertook geochemical analyses of available surface and drill hole samples from the Mission Sill prospect. Ni-Cr ratios were plotted and sued to define the western contact of the Mission Sill intrusive complex. • Ground Gravity survey data was collected by Daishsat Geodetic Surveyors on 400m north-south spaced lines at 100m east-west station spacing.
Further work	• *The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).* • *Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.*	• RC drill testing • Air core drill testing