GOLD MINERALISATION AT THEIA EXTENDED 210 VERTICAL METRES AND REMAINS OPEN

First hole of an ongoing 9-hole diamond program returns exceptional wide zones of mineralisation, confirming strong potential to significantly expand the 1.4Moz Theia gold deposit

For personal use only

HIGHLIGHTS

Mandilla Gold Project

- Significant gold assays returned from the first hole of Astral's ongoing 9-hole (5,500m) deep diamond drilling (**DD**) program targeting extensions of the cornerstone 1.4Moz[1] Theia Deposit at the Mandilla Gold Project in WA.
- Drill-hole AMRCD263[2] intersected gold mineralisation to a depth of 614.4 metres downhole and 210 metres below the current Mineral Resource Estimate (**MRE**), with a total intersection of **358.23m at 1.03 g/t Au** from 256.17m.
- Higher-grade zones of gold mineralisation within the total intersection include:
  - **9.41m at 1.93g/t Au** from 285m, including **0.3m at 14.6g/t Au** from 289.84m and **0.3m at 21.5g/t Au** from 290.99m
  - **15.70m at 3.40g/t Au** from 320.44m, including **0.43m at 121.6g/t Au** from 330.02m
  - **127.27m at 1.20g/t Au** from 352.00m including **0.34m at 72.2g/t Au** from 355.09m, **0.3m at 17.0g/t Au** from 357.00m, **0.3m at 10.7g/t Au** from 450.66m, **0.3m at 17.0g/t Au** from 451.34m, **0.59m at 30.0g/t Au** from 458.24m and **0.3m at 71.1g/t Au** from 465.85m
  - **81.46m at 1.35g/t Au** from 515.04m, including **1.13m at 42.7g/t Au** from 518.07
  - **5.75m at 2.00g/t Au** from 607.75m
- The mineralisation intersected in AMRDC263 occurs largely outside the current 1.4Moz Theia MRE and confirms a significant extension of the mineralised system at depth.
- The diamond drilling program is advancing rapidly, with the third hole (AMRCD264) completed and the fourth hole is now underway.
- Geological logging of drill-hole AMRCD264 prompted the extension of this beyond its original planned depth of 500 metres to a final depth of 605.3 metres.

[1] - Theia JORC 2012 Mineral Resource Estimate: 1.3Mt at 1.3g/t Au from 57koz Measured Mineral Resources, 23.4Mt at 1.1g/t Au for 825koz Indicated Mineral Resources and 16.2Mt at 1.0g/t Au for 505koz Inferred Mineral Resources (refer to Astral ASX announcement dated 21 April 2026)

[2] - All references to 'visible gold' for diamond drill hole AMRCD263 in this announcement are references to occurrences of visible gold in core samples from drill holes for which chemical assay results have been provided in the assay results table in Appendix 1 of this announcement.

Astral Resources' Managing Director Marc Ducler said:

"The first hole from our Theia Deeps diamond drill program delivered highly encouraging results, providing strong evidence that the Theia gold system appears to extend well beyond the limits of the current 1.4Moz Mineral Resource.

*"Importantly, within a spectacular 358 metre total intersection, broad zones of mineralisation such as **127.3m at 1.20g/t Au** from 352m and **81.5m at 1.35g/t Au** from 518m occur almost entirely outside the existing Resource envelope and demonstrate significant potential to continue growing the Theia deposit at depth.*

"Geological logging of this hole showed quartz veining, trace sulphides and visible gold – all of which have previously been strong indicators of economic gold mineralisation at Theia, which has been confirmed by these latest gold assays, returning strong widths and grades.

"We are also very encouraged by geological logging of the recently completed third diamond hole which has been extended beyond its planned depth of 500 metres to a final down-hole depth of 605 metres.

"Processing of the diamond core is well advanced, with the second drill-hole (AMRCD259) processed and pending assay returns. The third drill-hole (AMRCD264) has also been processed with samples being dispatched to the lab this week."

JOIN ASTRAL RESOURCES' INVESTOR HUB

Visit Astral Resources' Investor Hub or scan the QR code to be a part of Astral's interactive hub.

Click here to see the latest announcement.

For personal use only

Astral Resources NL (ASX: AAR) (**Astral** or the **Company**) is pleased to report assay results for the first hole of an ongoing 9-hole (5,500m) diamond drilling (DD) program at the Theia Deposit, part of the 100%-owned Mandilla Gold Project (**Mandilla**), located approximately 70km south of Kalgoorlie in Western Australia (Figure 1).

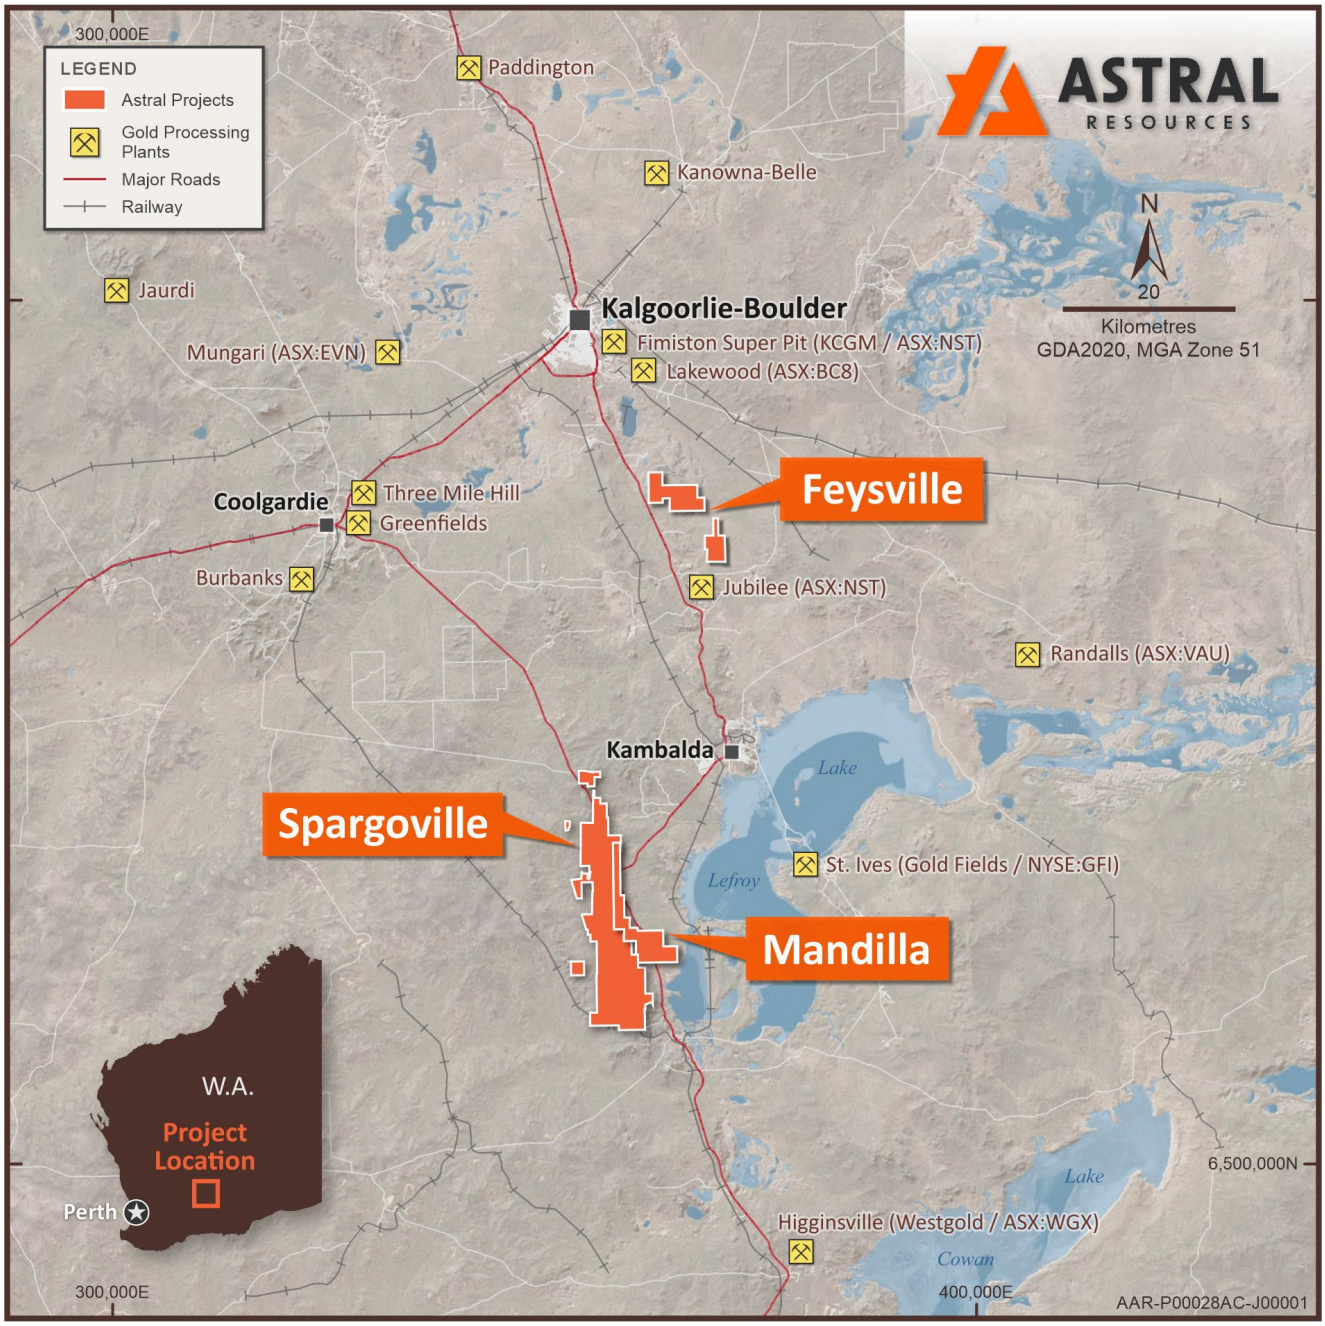


Figure 1 – Map illustrating the location of the Mandilla, Spargoville and Feysville Gold Projects.

MANDILLA DIAMOND DRILLING UPDATE

Astral currently has a DD rig conducting a 9-hole (5,500m) drilling program originally designed to test for depth extensions at Theia of up to 175m below the current Mineral Resource Estimate (**MRE**). This program is aiming to scope the potential broader scale of the Theia mineral system – specifically, to understand whether the mineralisation continues beneath the current MRE limits.

An isometric view showing the drill-hole collar locations is shown in Figure 2.

For personal use only

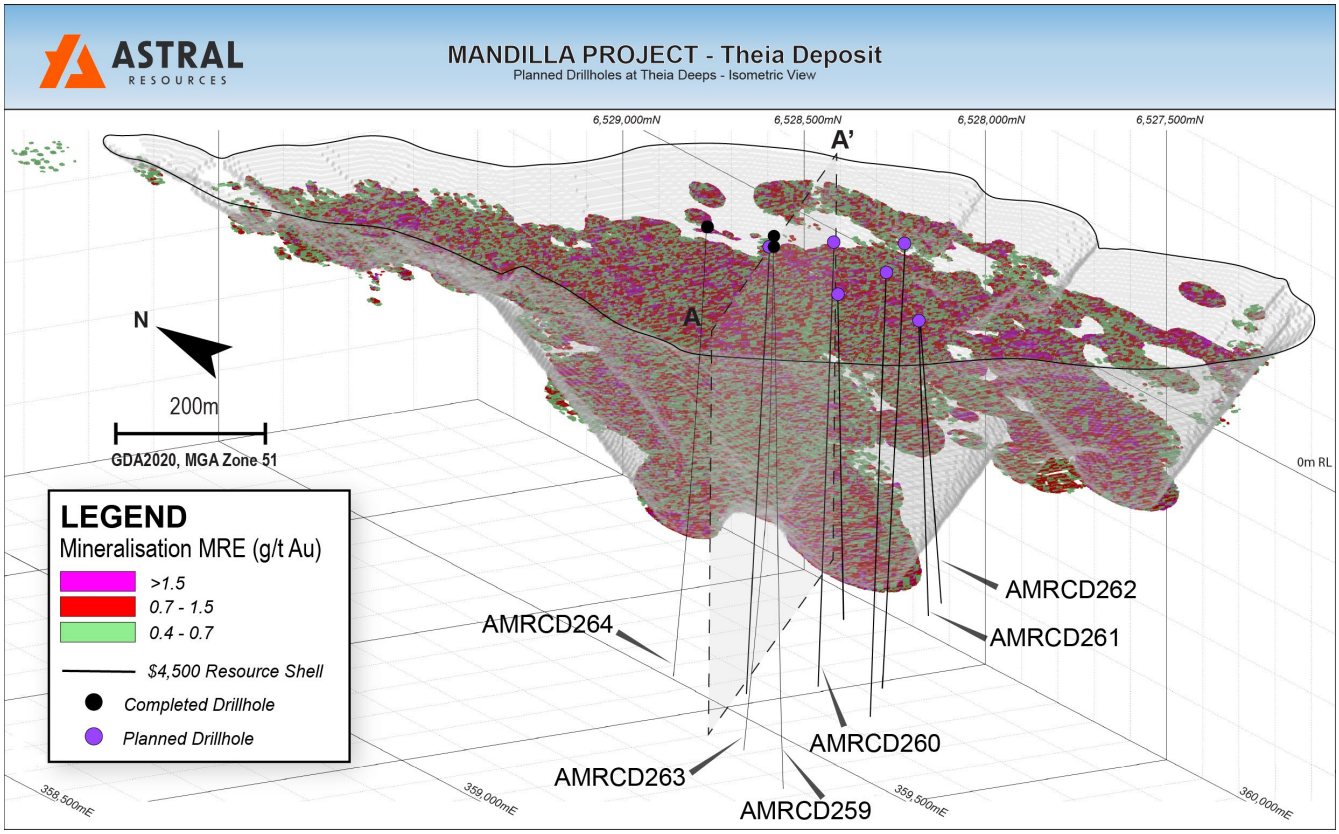


Figure 2 – Isometric view of the Theia Deposit showing the MRE block model, the drill traces for the completed and planned DD holes and the cross-section location

Assay results for the first DD hole (AMRCD263) have now been received. Several zones of higher-grade gold mineralisation were recorded within a total intersection of **358.23m at 1.03 g/t Au** from 256.17m with best results including:

- **9.41m at 1.93g/t Au** from 285m including **0.3m at 14.6g/t Au** from 289.84m and **0.3m at 21.5g/t Au** from 290.99m
- **15.70m at 3.40g/t Au** from 320.44m including **0.43m at 121.6g/t Au** from 330.02m
- **127.27m at 1.20g/t Au** from 352.00m including **0.34m at 72.2g/t Au** from 355.09m, **0.3m at 17.0g/t Au** from 357.00m, **0.3m at 10.7g/t Au** from 450.66m, **0.3m at 17.0g/t Au** from 451.34m, **0.59m at 30.0g/t Au** from 458.24m and **0.3m at 71.1g/t Au** from 465.85m
- **81.46m at 1.35g/t Au** from 515.04m including **1.13m at 42.7g/t Au** from 518.07
- **5.75m at 2.00g/t Au** from 607.75m

This mineralisation occurs largely outside the current 1.4Moz Theia MRE[1] and appears to confirm the continuation of the mineralised system at depth, indicating considerable potential to continue to grow the 1.4Moz MRE.

Cross-section A-A', as located in the above isometric view, is shown below in Figure 3.

For AMRCD263, the drill trace plots visible gold occurrences observed during core logging and quartz vein percentage on the left-hand side of the drill trace and the gram x metre assay interval on the right-hand side.

For personal use only

For personal use only

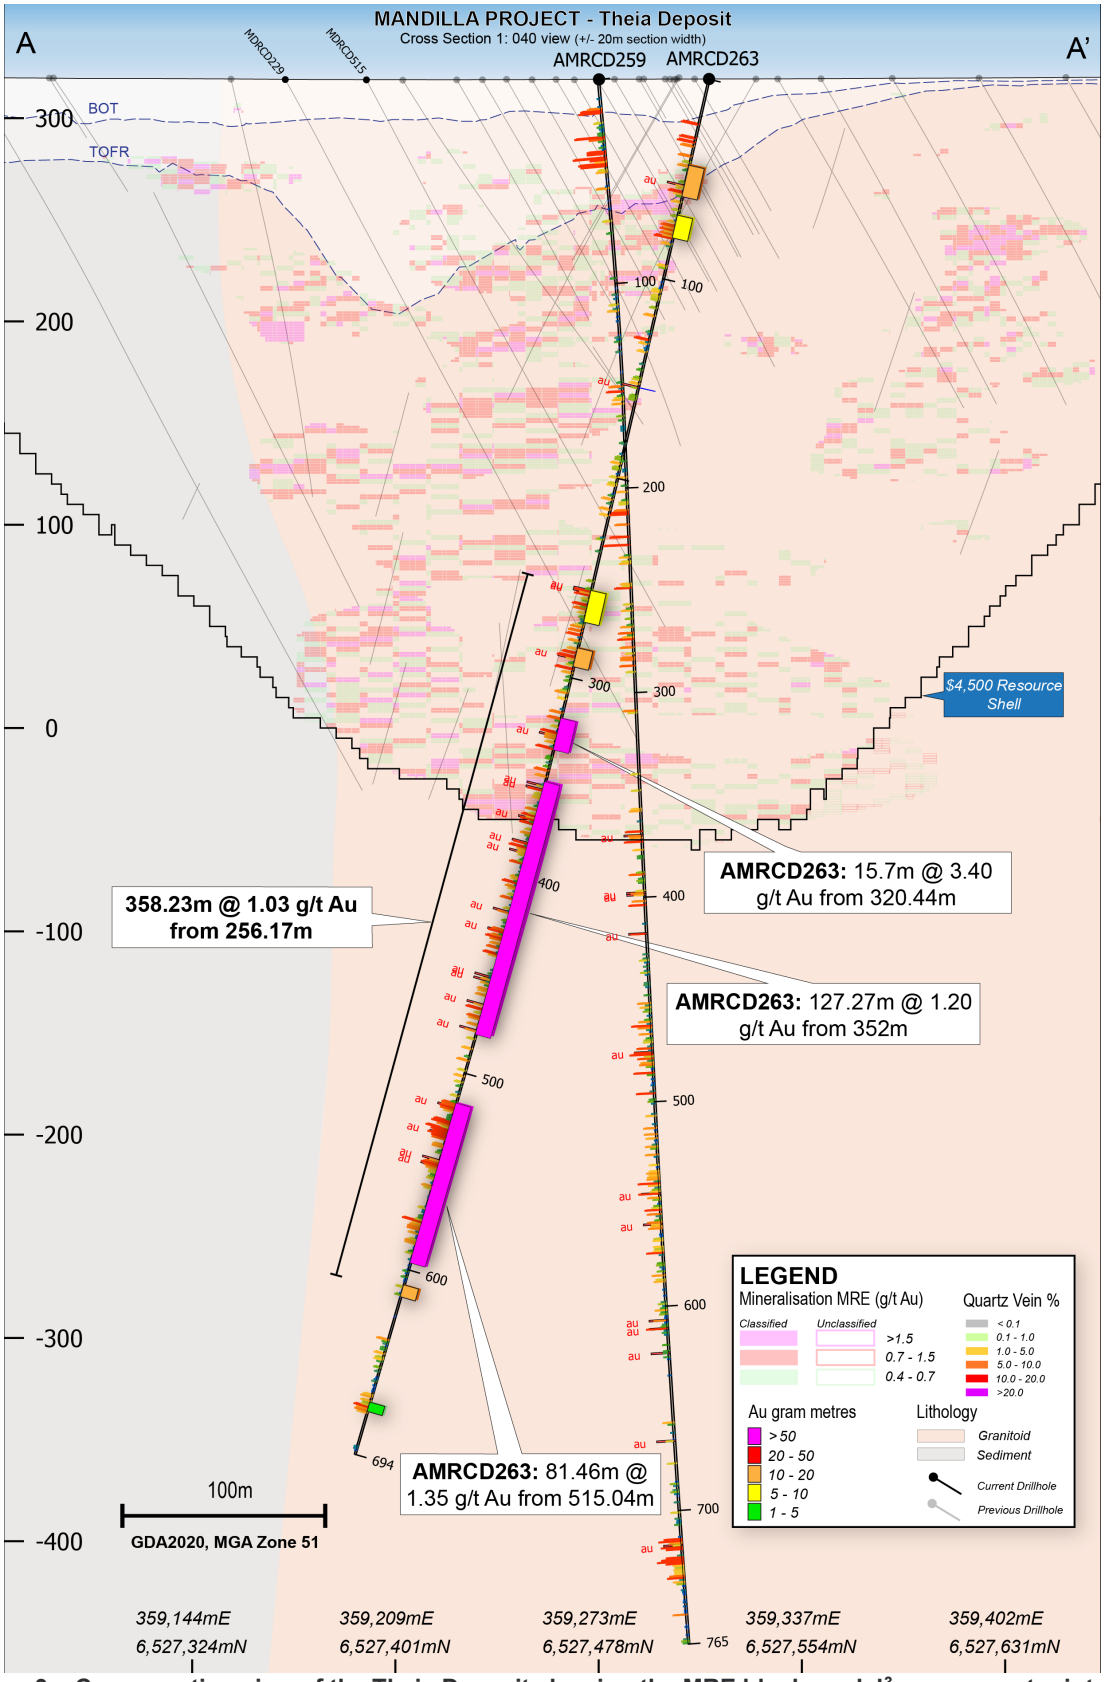


Figure 3 – Cross-section view of the Theia Deposit showing the MRE block model[3], gram x metre interval (AMRCD263), logged visible gold and the quartz vein percentage value.

[3] - Classified mineralisation is within a constraining optimised pit shell. Unclassified mineralisation falls outside the constraining optimised pit shell (refer to AAR ASX Announcement dated 21 April 2026).

Cautionary Statement: *Visual estimates of mineral abundance should never be considered a proxy or substitute for laboratory analyses where concentrations or grades are the factor of principal economic interest. Visual estimates also potentially provide no information regarding impurities or deleterious physical properties relevant to valuations.*

As illustrated, in AMRCD263, the correlation between quartz vein percentage plus +/- visible free gold and economic zones of gold mineralisation is very strong, as seems to be typical of the Theia mineralised system.

Table 6 (in Appendix 1) provides a further correlation of the observation of visible gold and the corresponding gold assay. 75% of these occurrences returned a gold grade above the Theia MRE grade and 93% returned a gold grade above the MRE lower cut-off. Also of note 54% of the observed occurrences of visible gold were on the non-sample side of the diamond core.

Visible gold is common within the Theia Deposit. For the most part, this gold is hosted within quartz veins, with gold grains typically up to 1mm in size, but varying from pinhead to match-head size.

Due to the inherent nuggety nature of visible gold, such as at Theia, coarse visible gold does not always correlate with the best gold assays. However, visible gold together with the quartz vein percentage has been demonstrated to be a reliable indicator of gold mineralisation at Theia and is considered a clear indication of the continuation of the mineral system at depth.

CURRENT AND FUTURE WORK PROGRAMS

Two drill rigs are currently operating at Mandilla.

The DD program is ongoing with three holes of a 9-hole (5,500m) program completed.

Meanwhile, a reverse circulation (**RC**) drill rig is continuing the in-fill program on the remainder of the Stage 1 Theia open pit, targeting a 12.5m x 12.5m drill density to support a further increase in Measured Resources ahead of the commencement of mining at the Stage 1 open pit. Approximately 6,000 metres have been completed of the first phase (23,000m) of a three-phase program.

Sterilisation drilling at Mandilla will continue pending heritage clearance surveys.

RC and diamond drilling is being planned for Kamperman once heritage clearance surveys, which commenced in April, have been completed.

APPROVED FOR RELEASE

This announcement has been authorised for release by the Managing Director.

For further information:

Investors
Marc Ducler
Managing Director
Astral Resources
+61 8 9382 8822

Media
Nicholas Read
Read Corporate
+61 419 929 046

For personal use only

ABOUT THE MANDILLA GOLD PROJECT

The Mandilla Gold Project is situated in the northern Widgiemooltha greenstone belt, approximately 70 kilometres south of the significant mining centre of Kalgoorlie, Western Australia.

The area hosts world-class deposits such as the Golden Mile Super Pit in Kalgoorlie, owned by Northern Star Resources Limited (ASX: NST), and the St Ives Gold Mine approximately 20 kilometres to the south-east of Kambalda, owned by Gold Fields Limited, as well as the Beta Hunt Gold Mine immediately to the south of Kambalda, owned by Westgold Resources Limited (ASX: WGX).

Mandilla is covered by existing Mining Leases which are not subject to any third-party royalties other than the standard WA Government gold royalty.

The Mandilla Gold Project includes the Theia, Iris, Eos and Hestia deposits.

Gold mineralisation at Theia and Iris is comprised of structurally controlled quartz vein arrays and hydrothermal alteration close to the western margin of the Emu Rocks Granite and locally in contact with sediments of the Spargoville Group.

Significant NW to WNW-trending structures along the western flank of the project are interpreted from aeromagnetic data to cut through the granitic intrusion. These structures are considered important in localising gold mineralisation at Theia, which has a mineralised footprint extending over a strike length of more than 1.6km.

A second sub-parallel structure hosts gold mineralisation at the Iris deposit. The mineralised footprint at Iris extends over a strike length of approximately 700 metres, combining with Theia to form a mineralised zone extending over a strike length of more than 2.3 kilometres.

At Eos, located further to the south-east, a relatively shallow high-grade mineralised palaeochannel deposit has been identified which extends over a length of approximately 900 metres. A primary gold source is also present, with further drilling required to determine both the nature and structural controls on mineralisation and its extent.

Mineralisation delineated over approximately 1,300 metres of strike at the Hestia deposit, located approximately 500 metres west of Theia, is associated with a shear zone adjacent to a mafic/sediment contact, interpreted to be part of the major north-south trending group of thrust faults known as the Spargoville Shear Corridor.

Locally, the Spargoville Shear Corridor hosts the historically mined Wattle Dam gold mine (266koz at 10.6g/t Au) and, further to the north, the Ghost Crab/Mt Marion mine (>1Moz).

The mineralisation at Hestia, which is present in a different geological setting to the bedrock mineralisation at Theia and Iris, remains open both down-dip and along strike.

In April 2026, Astral announced a Mineral Resource Estimate (MRE) of **53.5Mt at 1.0 g/t Au for 1.74Moz** of contained gold[4] for the Mandilla Gold Project.

[4] - Mandilla JORC 2012 Mineral Resource Estimate: 1.3Mt at 1.3g/t Au from 57koz Measured Mineral Resources, 32.6Mt at 1.0g/t Au for 1,092koz Indicated Mineral Resources and 19.6Mt at 0.9g/t Au for 588koz Inferred Mineral Resources (refer to Astral ASX announcement dated 21 April 2026)

For personal use only

Metallurgical testing undertaken on each of the main deposits at Mandilla – Theia, Iris, Eos and Hestia – has demonstrated high gravity recoverable gold, fast leach kinetics and exceptional overall gold recoveries with low reagent consumptions and coarse grinding[5,6].

In June 2025, Astral announced the results of a Preliminary Feasibility Study for Mandilla (**Mandilla PFS**), which also included the mining of gold deposits at Feysville. It was based on a standalone project comprising seven open pit mines feeding a 2.75Mtpa processing facility, producing 95koz per year for the first 12 years. The base case gold price assumption for the Mandilla PFS was A$4,250/oz and demonstrated a Net Present Value (8% discount rate) (NPV_8) of **$1.4 billion**[7]. At a A$6,250 gold price, the NPV_8 increases to **$2.9 billion**.

Four open-pit mines at Mandilla were included in the Mandilla PFS (Theia, Hestia, Eos and Iris), and three open-pits mines at Feysville (Kamperman, Think Big and Rogan Josh).

A map of Mandilla illustrating both the local area geology and mineral deposits is set out in Figure 4.

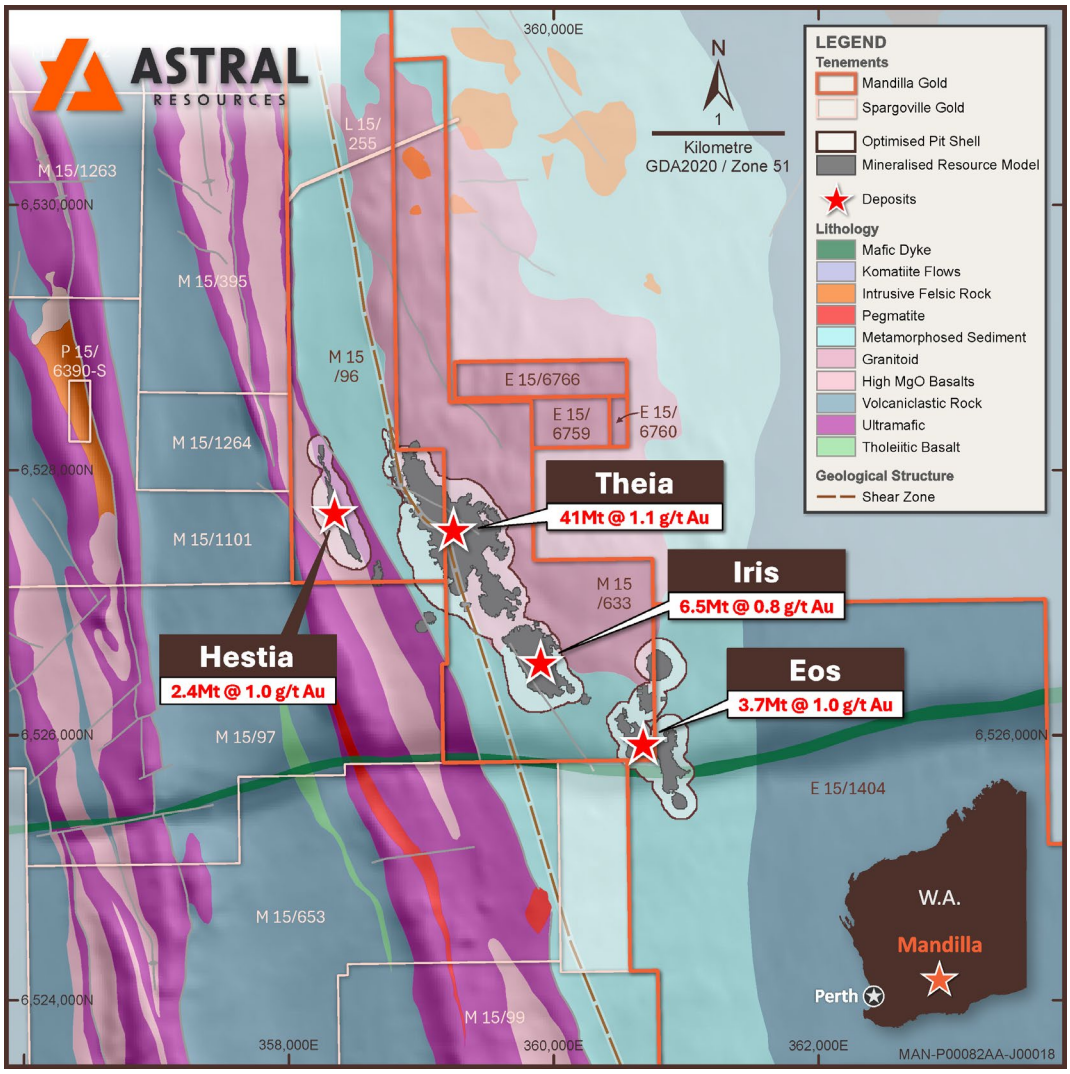


Figure 4 – Map of Mandilla Gold Project on local area geology.

[5] - ASX Announcement 6 June 2022 "Outstanding metallurgical test-work results continue to de-risk Mandilla."
[6] - ASX Announcement 17 September 2024 "Outstanding metallurgical results further de-risk Mandilla."
[7] - Mandilla Project Pre-Feasibility Study – Maiden Ore Reserve (refer to Astral ASX Announcement dated 25 June 2025)

For personal use only

CONSOLIDATED MINERAL RESOURCE & ORE RESERVE ESTIMATES

Ore Reserve Estimates

The Group's consolidated JORC 2012 Ore Reserve Estimate as at the date of this report is detailed in Table 1 below.

Table 1 – Group Ore Reserves

Project	Probable			Total Ore Reserve		
	Tonnes (Mt)	Grade (Au g/t)	Metal (oz Au)	Tonnes (Mt)	Grade (Au g/t)	Metal (oz Au)
Mandilla[8]	34.3	0.9	1,000,000	34.3	0.9	1,000,000
Feysville[8]	2.3	1.2	88,000	2.3	1.2	88,000
Total	**36.6**	**0.9**	**1,082,000**	**36.6**	**0.9**	**1,082,000**

Ore Reserves are a subset of Mineral Resources.

Ore Reserves are estimated using a gold price of AUD $3,000 per ounce.

The preceding statement of Ore Reserves conforms to the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (JORC Code) 2012 Edition. All tonnages reported are dry metric tonnes. Minor discrepancies may occur due to rounding to appropriate significant figures.

The Ore Reserves for Mandilla are reported at a cut-off grade of 0.30 g/t Au lower cut-off and Feysville are reported at a cut-off grade of 0.40 g/t Au lower cut-off.

Group Mineral Resource Estimates

The Group's consolidated JORC 2012 Mineral Resource Estimate as at the date of this report is detailed in Table 2 below.

Table 2 – Group Mineral Resources

Project	Measured			Indicated			Inferred			Total Mineral Resource		
	Tonnes (Mt)	Grade (Au g/t)	Metal (oz Au)	Tonnes (Mt)	Grade (Au g/t)	Metal (oz Au)	Tonnes (Mt)	Grade (Au g/t)	Metal (oz Au)	Tonnes (Mt)	Grade (Au g/t)	Metal (oz Au)
Mandilla[4]	1.3	1.3	57,000	32.6	1.0	1,092,000	19.6	0.9	588,000	53.5	1.0	1,736,000
Feysville[9]	-	-	-	3.5	1.3	144,000	1.5	1.1	53,000	5.0	1.2	196,000
Spargoville[10]	-	-	-	1.9	1.3	81,000	1.1	1.6	58,000	3.0	1.4	139,000
Total	**1.3**	**1.3**	**57,000**	**38.1**	**1.1**	**1,317,000**	**22.2**	**1.2**	**698,000**	**61.6**	**1.0**	**2,072,000**

The preceding statement of Mineral Resources conforms to the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (JORC Code) 2012 Edition. All tonnages reported are dry metric tonnes. Minor discrepancies may occur due to rounding to appropriate significant figures

The Mineral Resources are reported at 0.40g/t Au lower cut-off for Mandilla and 0.39 g/t Au lower cut-off for Spargoville and Feysville, while constrained within pit shells derived using a gold price of AUD$4,500 per ounce for Mandilla, AUD$3,500 for Spargoville and AUD$2,500 per ounce for Feysville.

[8] - Mandilla Project Pre-Feasibility Study – Maiden Ore Reserve (refer to Astral ASX Announcement dated 25 June 2025)

[9] - Refer to Astral ASX announcement dated 1 November 2024.

[10] - Refer to Astral ASX announcement dated 7 May 2025.

For personal use only

For personal use only

Competent Person's Statements

Mandilla

The information in this announcement that relates to exploration targets and exploration results for the Mandilla Gold Project is based on, and fairly represents, information and supporting documentation compiled by Ms Julie Reid, who is a full-time employee of Astral Resources NL. Ms Reid is a Competent Person and a Member of The Australasian Institute of Mining and Metallurgy. Ms Reid has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Ms Reid consents to the inclusion in this report of the material based on this information, in the form and context in which it appears.

The information in this announcement that relates to the Ore Reserves for the Mandilla Gold Project were announced in the Company's ASX announcement dated 25 June 2025 titled "Mandilla Project Pre-Feasibility Study – Maiden Ore Reserve". The Company confirms that it is not aware of any new information or data that materially affects the information included in the ASX announcement dated 25 June 2025 and all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed. The Company confirms the form and context in which Competent Persons' findings are presented have not materially changed from previous market announcements. The reports are available to view on the ASX website and on the Company's website at www.astralresources.com.au.

The information in this announcement that relates to the Mineral Resources for the Mandilla Gold Project reported in this announcement were announced in the Company's ASX announcement dated 21 April 2026 titled " Mineral Resource Increased to 2.07 Million Ounces - Mandilla Now at 1.74 Million Ounces Gold". The Company confirms that it is not aware of any new information or data that materially affects the information included in the ASX announcement dated 21 April 2026 and all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed. The Company confirms the form and context in which Competent Persons' findings are presented have not materially changed from previous market announcements. The reports are available to view on the ASX website and on the Company's website at www.astralresources.com.au.

The information in this announcement that relates to metallurgical test work for the Mandilla Gold Project reported in this announcement were announced in the Company's ASX announcements dated 28 January 2021, 6 June 2022, 17 September 2024 and 5 March 2025. The Company confirms that it is not aware of any new information or data that materially affects the information included in the ASX announcements dated 28 January 2021, 6 June 2022, 17 September 2024 and 5 March 2025 and all material assumptions and technical parameters in the relevant market announcement continue to apply and have not materially changed. The Company confirms the form and context in which Competent Persons' findings are presented have not materially changed from previous market announcements. The reports are available to view on the ASX website and on the Company's website at www.astralresources.com.au.

Feysville

The information in this announcement that relates to exploration targets and exploration results for the Feysville Gold Project is based on, and fairly represents, information and supporting documentation compiled by Ms Julie Reid, who is a full-time employee of Astral Resources NL. Ms Reid is a Competent Person and a Member of The Australasian Institute of Mining and Metallurgy. Ms Reid has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Ms Reid consents to the inclusion in this report of the material based on this information, in the form and context in which it appears.

The information in this announcement that relates to the Ore Reserves for the Feysville Gold Project were announced in the Company's ASX announcement dated 25 June 2025 titled "Mandilla Project Pre-Feasibility Study – Maiden Ore Reserve". The Company confirms that it is not aware of any new information or data that materially affects the information included in the ASX announcement dated 25 June 2025 and all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed. The Company confirms the form and context in which Competent Persons' findings are presented have not materially changed from previous market announcements. The reports are available to view on the ASX website and on the Company's website at www.astralresources.com.au.

For personal use only

The information in this announcement that relates to the Mineral Resources for the Feysville Gold Project reported in this announcement were announced in the Company's ASX announcement dated 1 November 2024 titled "Astral's Group Gold Mineral Resource Increases to 1.46Moz with Updated Feysville MRE". The Company confirms that it is not aware of any new information or data that materially affects the information included in the ASX announcement dated 1 November 2024 and all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed. The Company confirms the form and context in which Competent Persons' findings are presented have not materially changed from previous market announcements. The reports are available to view on the ASX website and on the Company's website at www.astralresources.com.au.

The information in this announcement that relates to metallurgical test work for the Feysville Gold Project reported in this announcement were announced in the Company's ASX announcement dated 22 May 2025. The Company confirms that it is not aware of any new information or data that materially affects the information included in the ASX announcement dated 22 May 2025 and all material assumptions and technical parameters in the relevant market announcement continue to apply and have not materially changed. The Company confirms the form and context in which Competent Persons' findings are presented have not materially changed from previous market announcements. The reports are available to view on the ASX website and on the Company's website at www.astralresources.com.au.

Spargoville

The information in this announcement that relates to exploration targets and exploration results for the Spargoville Gold Project is based on, and fairly represents, information and supporting documentation compiled by Ms Julie Reid, who is a full-time employee of Astral Resources NL. Ms Reid is a Competent Person and a Member of The Australasian Institute of Mining and Metallurgy. Ms Reid has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Ms Reid consents to the inclusion in this report of the material based on this information, in the form and context in which it appears.

The information in this announcement that relates to the Mineral Resources for the Spargoville Gold Project were announced in the Company's ASX announcement dated 7 May 2025 titled "Astral's Group Gold Mineral Resource Increases to 1.76Moz with the inclusion of Spargoville Gold Project". The Company confirms that it is not aware of any new information or data that materially affects the information included in the ASX announcement dated 7 May 2025 and all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed. The Company confirms the form and context in which Competent Persons' findings are presented have not materially changed from previous market announcements. The reports are available to view on the ASX website and on the Company's website at www.astralresources.com.au.

Previously Reported Results

Exploration Results

The information in this announcement that relates to Exploration Results is extracted from the ASX Announcements (Original Announcements), which have been previously announced on the Company's ASX Announcements Platform and the Company's website at www.astralresources.com.au. The Company confirms that it is not aware of any new information or data that materially affects the information included in the Original Announcements and that all material assumptions and technical parameters underpinning the estimates in the Original Announcements continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Persons' findings are presented have not been materially modified from the original announcement.

Pre-Feasibility Study

The information in this announcement that relates to the production target for the Mandilla Gold Project was reported by Astral in accordance with ASX Listing Rules and the JORC Code (2012 edition) in the announcement "Mandilla Project Pre-Feasibility Study – Maiden Ore Reserve" released to the ASX on 25 June 2025. A copy of that announcement is available at www.asx.com.au. Astral confirms it is not aware of any new information or data that materially affects the information included in that market announcement and that all material assumptions and technical parameters underpinning the production target, and the related forecast financial information

derived from the production target in that market announcement continue to apply and have not materially changed. Astral confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from that market announcement.

Forward Looking Statements

This announcement may contain certain "forward looking statements" which may not have been based solely on historical facts but rather may be based on the Company's current expectations about future events and results. Where the Company expresses or implies an expectation or belief as to future events or results, such expectation or belief is expressed in good faith and believed to have a reasonable basis.

However, forward looking statements are subject to risks, uncertainties, assumptions, and other factors which could cause actual results to differ materially from future results expressed, projected or implied by such forward looking statements. Such risks include, but are not limited to exploration risk, resource risk, metal price volatility, currency fluctuations, increased production costs and variances in ore grade or recovery rates from those assumed in mining plans, as well as political and operational risks in the countries and states in which we operate, and government regulation and judicial outcomes.

For more detailed discussion of such risks and other factors, see the Company's other filings. Readers should not place undue reliance on forward looking information. The Company does not undertake any obligation to release publicly any revisions to any "forward looking statement" to reflect events or circumstances after the date of this announcement, or to reflect the occurrence of unanticipated events, except as may be required under applicable securities laws.

For personal use only

Appendix 1 – Drill Hole Details

Mandilla Gold Project

Table 3 – Drill hole data

Hole ID	Type	Hole Depth (m)	GDA (North)	GDA (East)	GDA RL	Dip	MGA Azmith
AMRCD263	DD	693.9	6,527,519	359,310	319.2	-77	214
AMRCD259	RCDD	775.1	6,527,473	359,279	319.1	-85	40
AMRCD264	DD	605.3	6,527,594	359,247	320.0	-75	220

Table 4 – Drilling intersections

Hole ID	Location	From (m)	To (m)	Length (m)	Grade g/t Au
AMRCD263	Theia	**42.93**	**59.00**	**16.07**	**0.86**
		68.05	79.60	11.55	0.73
		98.00	99.00	1.00	0.40
		105.02	107.00	1.98	0.33
		154.82	155.20	0.38	0.20
		256.17	272.15	15.98	0.50
		285.00	**294.41**	**9.41**	**1.93**
		Includes 0.3m at 14.6g/t from 289.84 metres			
		Includes 0.3m at 21.5g/t from 290.99 metres			
		320.44	**336.14**	**15.70**	**3.40**
		Includes 0.43m at 121.6g/t from 330.02 metres			
		352.00	**479.27**	**127.27**	**1.20**
		Includes 0.34m at 72.2g/t from 355.09 metres			
		Includes 0.3m at 17.0g/t from 357.00 metres			
		Includes 0.3m at 10.7g/t from 450.66 metres			
		Includes 0.3m at 17.0g/t from 451.34 metres			
		Includes 0.59m at 30.0g/t from 458.24 metres			
		Includes 0.3m at 71.1g/t from 465.85 metres			
		515.04	**596.50**	**81.46**	**1.35**
		Includes 0.3m at 71.1g/t from 465.85 metres			
		607.75	**613.50**	**5.75**	**2.00**
		667.30	672.08	4.78	0.56

For personal use only

For personal use only

Table 5 – Logging Table AMRCD259

Hole ID	Downhole depth (m)	Average quartz percentage	Logged mineralisation
AMRCD259	150-160	2.5	Py
AMRCD259	160-170	0.6	Py
AMRCD259	170-180	0.3	Py
AMRCD259	180-190	0.3	Py
AMRCD259	190-200	0.9	Py
AMRCD259	200-210	1.3	Py
AMRCD259	210-220	2.8	Py
AMRCD259	220-230	4.4	Py
AMRCD259	230-240	1.1	Py Au
AMRCD259	240-250	2.1	Py Po Au
AMRCD259	250-260	1.1	Py
AMRCD259	260-270	1.7	Py Po
AMRCD259	270-280	3.4	Py Po
AMRCD259	280-290	2.5	Py
AMRCD259	290-300	1.9	Py
AMRCD259	300-310	1.5	Py
AMRCD259	310-320	0.8	Py
AMRCD259	320-330	0.7	Py
AMRCD259	330-340	2.1	Py
AMRCD259	340-350	0.8	Py
AMRCD259	350-360	1.4	Py Po
AMRCD259	360-370	3.7	Py Po Gl Au
AMRCD259	370-380	2.8	Py
AMRCD259	380-390	1.6	Py
AMRCD259	390-400	2.1	Py Au
AMRCD259	400-410	1.7	Py
AMRCD259	410-420	2.2	Py Au
AMRCD259	420-430	0.4	Py
AMRCD259	430-440	1.1	Py Po
AMRCD259	440-450	0.7	Py
AMRCD259	450-460	1.2	Py Po
AMRCD259	460-470	2.8	Py Po Cpy Gl
AMRCD259	470-480	4.2	Py Po Gl Au
AMRCD259	480-490	2.7	Py
AMRCD259	490-500	2.4	Py Gl
AMRCD259	500-510	1.7	Py
AMRCD259	510-520	1.4	Py
AMRCD259	520-530	0.9	Py
AMRCD259	530-540	3.9	Py Po Gl
AMRCD259	540-550	4.5	Py Po Gl Au
AMRCD259	550-560	6.8	Py Po Au
AMRCD259	560-570	4.7	Py Po
AMRCD259	570-580	2.5	Py Po
AMRCD259	580-590	2.9	Py Au
AMRCD259	590-600	0.9	Py
AMRCD259	600-610	2.1	Py Po Au
AMRCD259	610-620	2.9	Py Po Au
AMRCD259	620-630	0.5	Py Au
AMRCD259	630-640	0.1	Py Cpy

Hole ID	Downhole depth (m)	Average quartz percentage	Logged mineralisation
AMRCD259	640-650	0.4	Py Cpy
AMRCD259	650-660	1.4	Py
AMRCD259	660-670	0.4	Py Au
AMRCD259	670-680	0.3	Py
AMRCD259	680-690	1.1	Py
AMRCD259	690-700	0.7	Py
AMRCD259	700-710	0.7	Py
AMRCD259	710-720	9.9	Py Po Au
AMRCD259	720-730	3.9	Py Po Gl
AMRCD259	730-740	1.2	Py Po
AMRCD259	740-750	0.6	Py
AMRCD259	750-760	1.5	Py
AMRCD259	760-770	1.7	Py Po Au
AMRCD259	770-780	1.9	Py

Py = pyrite, Po = pyrrhotite, Gl = galena, Au = gold, Cpy = Chalcopyrite

** All occurrences of visible gold are estimated to be below 0.01% and all logged occurrences of sulphide mineralisation individually and in combination are estimated to be below 1%.*

Cautionary Statement: *Visual estimates of mineral abundance should never be considered a proxy or substitute for laboratory analyses where concentrations or grades are the factor of principal economic interest. Visual estimates also potentially provide no information regarding impurities or deleterious physical properties relevant to valuations.*

For personal use only

For personal use only

Table 6 – Assay of corresponding intervals with logged visible gold [2]

Hole ID	From (m)	To (m)	Length (m)	Quartz Vein %	Lithotype	Grade g/t Au	Commentary on Visible Gold
AMRCD263	53.66	54	1.08	5	JX FG	0.29	VG non-sample side
AMRCD263	69.8	70.1	0.3	3	JX FG str HmAb	1.43	VG sample side close to ori line
AMRCD263	74.88	75.21	0.33	5	FG	0.42	VG non-sample side
AMRCD263	154.82	155.2	0.38	5	FG	0.06	VG non-sample side
AMRCD263	257.08	257.43	0.35	6	IG	1.38	VG sample side
AMRCD263	257.79	258.2	0.41	6	IGS	0.56	VG non-sample side
AMRCD263	290.99	291.29	0.3	8	IGS	21.51	VG sample side and non-sample side
AMRCD263	330.02	330.45	0.43	7	IGS	112.58	VG non-sample side
AMRCD263	355.09	355.43	0.34	9	IGS	72.24	VG sample side and non-sample side
AMRCD263	357	357.3	0.3	6	IGS	16.98	VG non-sample side
AMRCD263	371.85	372.15	0.3	10	IGS	2.16	VG non-sample side
AMRCD263	383.24	383.54	0.3	4	IGS	3.72	VG sample side
AMRCD263	388.5	388.8	0.3	5	IGS	0.77	VG sample side
AMRCD263	412.95	413.25	0.3	6	IGS	0.87	VG non-sample side
AMRCD263	413.65	413.95	0.3	3	IGS	9.56	VG non-sample side
AMRCD263	418.57	418.87	0.3	0	IGS	6.19	VG sample side
AMRCD263	428.7	429	0.3	3	IG/IGS	8.19	VG sample side close to ori line
AMRCD263	435.2	435.7	0.5	7	IG/IGS	1.03	VG non-sample side
AMRCD263	450.66	450.96	0.3	7	IG	10.71	VG sample side
AMRCD263	451.34	451.64	0.3	2	IG	17	VG Sample side
AMRCD263	453.68	453.98	0.3	3	IG	1.07	VG sample side
AMRCD263	465.85	466.15	0.3	4	IG	71.08	VG non-sample side
AMRCD263	478.95	479.27	0.32	0	IG	0.7	VG non-sample side
AMRCD263	518.07	518.39	0.32	2	IGS	109.92	VG non-sample side
AMRCD263	531.13	531.44	0.31	3	IGS	1.87	VG non-sample side
AMRCD263	545.26	545.56	0.3	7	IG	4.5	VG non-sample side
AMRCD263	547.39	547.69	0.3	9	IG	5.61	VG sample side
AMRCD263	556.85	557.15	0.3	5	IG/IGS	1.19	VG sample side

VG = visible gold, Ori = Orientate

** Lithotypes - The colour of the host porphyritic monzonite unit varies within the Project area and can be used to subdivide the rock into three broad categories referred to internally as FG, IG and IGS:*

- *The FG pseudo-lithotype is principally related to a pervasive hematite impregnation*
- *IG basically appears as the non-red version of 'FG and is thought to approximate the protolith*
- *IGS is bleached version of the monozonite, interpreted to highlight zones of greater fluid-heat exchange between vein-fluids and the host monzonite and is consistently coincident with ore-zones at Theia*

Appendix 2 – JORC 2012 Table 1

Mandilla Gold Project

Section 1 – Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
Sampling techniques	• *Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.* • *Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.* • *Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.*	The project has been sampled using industry standard drilling techniques including diamond drilling (DD), and reverse circulation (RC) drilling and air-core (AC) drilling. The sampling described in this release has been carried out on the 2019, 2020, 2021, 2022, 2023, 2024, 2025 and 2026 DD, RC and AC drilling. All DD holes were drilled and sampled. The DD core is orientated, logged geologically and marked up for assay at a maximum sample interval of 1.2 metre constrained by geological or alteration boundaries. Drill core is cut in half by a diamond saw and half HQ or NQ2 core samples submitted for assay analysis. DD core was marked up by AAR geologists. The core was cut on site with AAR's CoreWise saw. All samples were assayed by MinAnalytical/ALS/Intertek with company standards blanks and duplicates inserted at 25 metre intervals. All RC holes were drilled and sampled. The samples are collected at 1m intervals via a cyclone and splitter system and logged geologically. A four-and-a-half-inch RC hammer bit was used ensuring plus 20kg of sample collected per metre. All RC samples were collected in bulka bags in the AAR compound and trucked weekly to MinAnalytical/ALS in Kalgoorlie via Hannans Transport. All samples transported were submitted for analysis. Transported material of varying thickness throughout project was generally selectively sampled only where a palaeochannel was evident. All samples were assayed by MinAnalytical/ALS with company standards blanks and duplicates inserted at 25 metre intervals. AC- 1m samples were collected from individual 1m sample piles. Sample weights were between 2 and 3 kg *Historical - The historic data has been gathered by a number of owners since the 1980s. There is a lack of detailed information available pertaining to the equipment used, sample techniques, sample sizes, sample preparation and assaying methods used to generate these data sets. Down hole surveying of the drilling where documented has been undertaken using Eastman single shot cameras (in some of the historic drilling) and magnetic multi-shot tools and gyroscopic instrumentation. All Reverse Circulation (RC) drill samples were laid out in 1 metre increments and a representative 500 – 700 gram spear sample was collected from each pile and composited into a single sample every 4 metres. Average weight 2.5 – 3 kg sample. All Aircore samples were laid out in 1 metre increments and a representative 500 – 700 gram spear sample was collected from each pile and composited into a single sample every 4 metres. Average weight 2.5 – 3 kg sample*. 1m samples were then collected from those composites assaying above 0.2g/t Au.
Drilling techniques	• *Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).*	Diamond drilling was cored using HQ and NQ2 diamond bits All RC holes were drilled using face sampling hammer reverse circulation technique with a four-and-a-half inch bit

For personal use only

Criteria	JORC Code Explanation	Commentary
		All AC holes were drilled to blade refusal.
Drill sample recovery	• *Method of recording and assessing core and chip sample recoveries and results assessed.* • *Measures taken to maximise sample recovery and ensure representative nature of the samples.* • *Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.*	DD: Diamond drilling collects uncontaminated fresh core samples which are cleaned at the drill site to remove drilling fluids and cuttings to present clean core for logging and sampling. RC: Definitive studies on RC recovery at Mandilla have not been undertaken systematically, however the combined weight of the sample reject and the sample collected indicated recoveries in the high nineties percentage range. Poor recoveries are recorded in the relevant sample sheet. No assessment has been made of the relationship between recovery and grade. Except for the top of the hole, while collaring there is no evidence of excessive loss of material and at this stage no information is available regarding possible bias due to sample loss. RC: RC face-sample bits and dust suppression were used to minimise sample loss. Drilling airlifted the water column above the bottom of the hole to ensure dry sampling. RC samples are collected through a cyclone and cone splitter, the rejects deposited on the ground, and the samples for the lab collected to a total mass optimised for photon assay (2.5 to 4 kg). AC: Poor recoveries are recorded in the relevant sample sheet. AC samples are collected through a cyclone, the rejects deposited on the ground, and the samples for the lab collected.
Logging	• *Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.* • *Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.* • *The total length and percentage of the relevant intersections logged.*	All chips and drill core were geologically logged by company geologists, using their current company logging scheme. The majority of holes (80%+) within the mineralised intervals have lithology information which has provided sufficient detail to enable reliable interpretation of wireframe. The logging is qualitative in nature, describing oxidation state, grain size, an assignment of lithology code and stratigraphy code by geological interval. DDH: Logging of diamond drill core records lithology, mineralogy, mineralisation, weathering, colour and other features of the samples, and structural information from oriented drill core. All recent core was photographed in the core trays, with individual photographs taken of each tray both dry, and wet, and photos uploaded to the AAR Server. RC: Logging of RC chips records lithology, mineralogy, mineralisation, weathering, colour and other features of the samples. All samples are wet-sieved and stored in a chip tray. AC samples were logged for colour, weathering, grain size, lithology, alteration veining and mineralisation where possible
Sub-sampling techniques and sample preparation	• *If core, whether cut or sawn and whether quarter, half or all core taken.* • *If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.* • *For all sample types, the nature, quality and appropriateness of the sample preparation technique.*	HQ and NQ2 diamond core was halved and the right side sampled. RC holes were drilled and sampled. The samples are collected at 1m intervals via a cyclone and splitter system and logged geologically. A four-and-a-half inch RC hammer bit was used ensuring plus 20kg of sample collected per metre. *Historical - The RC drill samples were laid out in one metre intervals. Spear samples were taken and composited for analysis as described above. Representative samples from each 1m interval were collected and retained as described above. No documentation of the sampling of RC chips is available for the Historical Exploration drilling* Recent RC drilling collects 1 metre RC drill samples that are channelled through a rotary cone-splitter, installed directly below a rig mounted cyclone, and an average 2-3 kg sample is collected in pre-numbered calico bags, and positioned on top of the rejects cone. Wet samples are noted on logs and sample sheets.

For personal use only

Criteria	JORC Code Explanation	Commentary
	• *Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.* • *Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.* • *Whether sample sizes are appropriate to the grain size of the material being sampled.*	Standard Western Australian sampling techniques applied. There has been no statistical work carried out at this stage. MinAnalytical/ALS assay standards, blanks and checks were inserted at regular intervals. Standards, company blanks and duplicates were inserted at 25 metre intervals. RC: 1 metre RC samples are split on the rig using a cone-splitter, mounted directly under the cyclone. Samples are collected to 2.5 to 4kg which is optimised for photon assay. Sample sizes are appropriate to the grain size of the material being sampled. Unable to comment on the appropriateness of sample sizes to grain size on historical data as no petrographic studies have been undertaken. Sample sizes are considered appropriate to give an indication of mineralisation given the particle size and the preference to keep the sample weight below a targeted 4kg mass which is the optimal weight to ensure representivity for photon assay. There has been no statistical work carried out at this stage.
Quality of assay data and laboratory tests	• *The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.* • *For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.* • *Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.*	Photon Assay technique at ALS, Kalgoorlie. Samples submitted for analysis via Photon assay technique were dried, crushed to nominal 90% passing 3.15mm, rotary split and a nominal ~500g sub sample taken (AC/RC Chips method code CRU-32a & SPL-32a, DD core method codes CRU-42a & SPL-32a) The ~500g sample is assayed for gold by PhotonAssay (method code Au-PA01) along with quality control samples including certified reference materials, blanks and sample duplicates. The ALS PhotonAssay Analysis Technique: - Developed by CSIRO and the Chrysos Corporation, This Photon Assay technique is a fast and chemical free alternative to the traditional fire assay process and utilizes high energy x-rays. The process is non-destructive on and utilises a significantly larger sample than the conventional 50g fire assay. ALS has thoroughly tested and validated the PhotonAssay process with results benchmarked against conventional fire assay. The National Association of Testing Authorities (NATA), Australia's national accreditation body for laboratories, has issued Min Analytical with accreditation for the technique in compliance with TSO/TEC 17025:2018-Testing. For regional AC drilling, samples are assayed by industry standard fire assay technique for gold; four-acid digest and aqua regia for multi-element analysis. Certified Reference Material from Geostats Pty Ltd submitted at 75 metre intervals approximately. Blanks and duplicates also submitted at 75m intervals giving a 1:25 sample ratio. Limited referee sampling has been completed with no statical differences identified
Verification of sampling and assaying	• *The verification of significant intersections by either independent or alternative company personnel.* • *The use of twinned holes.* • *Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.* • *Discuss any adjustment to assay data.*	Exploration Manager or Senior Geologist verified hole position on site. Standard data entry used on site, backed up in South Perth WA. No adjustments have been carried out. However, work is ongoing as samples can be assayed to extinction via the PhotonAssay Analysis Technique
Location of data points	• *Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.* • *Specification of the grid system used.* • *Quality and adequacy of topographic control.*	Pre October 2023, DD and RC drill holes were picked up by Minecomp using a Leica RTK GPS. Since October 2023 Southern Cross Surveys were contracted to pick up all latest drilling collars using GSNSwith manufacturers specifications +/- 10mm N,E and +/-15mm RL from Survey Control established from Landgate SSMs in RTK. AC Hole collar locations were recorded with a handheld GPS in MGA Zone 51S. RL was initially estimated then holes, once drilled were

For personal use only

Criteria	JORC Code Explanation	Commentary
		translated onto the surveyed topography wire frame using mining software. These updated RL's were then loaded into the database. Grid: GDA94 Datum UTM Zone 51
Data spacing and distribution	• *Data spacing for reporting of Exploration Results.* • *Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.* • *Whether sample compositing has been applied.*	Diamond drilling at Theia is at 40-40m to 40-80m spacing. Iris and Hestia have a number of selective diamond holes within each deposit. RC Drill hole spacing at Theia is a maximum of 40 x 40m. And approaching 20 x 20m within the central areas. In 2025, infill drilling in the central portion is at 12.5m by 12.5m. Iris and Hestia are generally 40x40 spacing with selected areas at 40x20m at Iris. Eos bedrock drilling is currently 80 x 40m spacing. AC Drill hole spacing is 10 to 50m on section, with 40m sectional spacing (approximate). The spacing is appropriate for the stage of exploration
Orientation of data in relation to geological structure	• *Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.* • *If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.*	All drill holes have been drilled normal to the interpreted strike. Most of the current holes at Theia are drilled on a 040 azimuth with minor variations applied where drill-hole spacing is limited. Other holes not drilled at 040 azimuth have been completed. Some holes have been drilled at other azimuths to test cross cutting structures and to hit western targets, avoiding surface infrastructure.
Sample security	• *The measures taken to ensure sample security.*	All samples taken daily to AAR yard in Kambalda West, then transported to the Laboratory in batches of up to 10 submissions
Audits or reviews	• *The results of any audits or reviews of sampling techniques and data.*	No audits have been carried out at this stage.

For personal use only

Section 2 - Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

<table>
<tr><th>Criteria</th><th>JORC Code Explanation</th><th>Commentary</th></tr>
<tr><td>Mineral tenement and land tenure status</td><td>• Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.
• The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</td><td>
<table>
<tr><th>Tenement</th><th>Status</th><th>Location</th><th>Interest Held (%)</th></tr>
<tr><td>E 15/1404</td><td>Granted</td><td>Western Australia</td><td>100</td></tr>
<tr><td>M 15/96</td><td>Granted</td><td>Western Australia</td><td>Gold Rights 100</td></tr>
<tr><td>M 15/633</td><td>Granted</td><td>Western Australia</td><td>Gold Rights 100</td></tr>
<tr><td>E 15/1943</td><td>Granted</td><td>Western Australia</td><td>100</td></tr>
<tr><td>E 15/1958</td><td>Granted</td><td>Western Australia</td><td>100</td></tr>
<tr><td>P 15/6759</td><td>Granted</td><td>Western Australia</td><td>100</td></tr>
<tr><td>P 15/6760</td><td>Granted</td><td>Western Australia</td><td>100</td></tr>
<tr><td>P 15/6766</td><td>Granted</td><td>Western Australia</td><td>100</td></tr>
</table>
The tenements are in good standing with the Western Australian Department of Mines, Industry Regulation and Safety.
No royalties other than the WA government 2.5% gold royalty.</td></tr>
<tr><td>Exploration done by other parties</td><td>• Acknowledgment and appraisal of exploration by other parties.</td><td>Several programs of RC percussion, diamond and air core drilling were completed in the area between 1988-1999 by Western Mining Corporation (WMC). In early 1988 a significant soil anomaly was delineated, which was tested late 1988 early 1989 with a series of 4 percussion traverses and diamond drilling. Gold mineralisation was intersected in thin quartz veins within a shallowly dipping shear zone. 1989-90- limited exploration undertaken with geological mapping and 3 diamond holes completed.
1990-91- 20 RC holes and 26 AC were drilled to follow up a ground magnetic survey and soil anomaly. 1991-94 - no gold exploration undertaken
1994-95 – extensive AC programme to investigate gold dispersion. A WNW trending CS defined lineament appears to offset the Mandilla granite contact and surrounding sediments, Shallow patchy supergene (20-25m) mineralisation was identified, which coincides with the gold soil anomaly
During 1995- 96 - Three AC traverses 400m apart and 920m in length were drilled 500m south of the Mandilla soil anomaly targeting the sheared granite felsic sediment contact.
1996-97 - A 69 hole AC program to the east of the anomaly was completed but proved to be ineffective due to thin regolith cover in the area. WID3215 returned 5m @7g/t from 69m to EOH.
1997-1998- 17 RC infill holes to test mineralisation intersected in previous drilling was completed. A number of bedrock intersections were returned including WID3278 with 4m @ 6.9g/t Au from 46m.</td></tr>
<tr><td>Geology</td><td>• Deposit type, geological setting and style of mineralisation.</td><td>The Mandilla Gold Project (Mandilla) is located approximately 70km south of Kalgoorlie, and about 25km south-west of Kambalda in Western Australia. The deposit is located on granted Mining Leases M15/633 (AAR gold rights), M15/96 (AAR gold rights) and Exploration Lease E15/1404 (wholly-owned by AAR).
Regional Geology
Mandilla is located within the south-west of the Lefroy Map Sheet 3235. It is situated in the Coolgardie Domain, on the western margin of the Kalgoorlie Terrain within the Wiluna-Norseman Greenstone Belt, Archaean Yilgarn Block.
Mandilla is located between the western Kunanalling Shear, and the eastern Zuleika Shear. Project mineralisation is related to north-south trending major D2[11] thrust faults known as the “Spargoville Trend”. The Spargoville Trend contains four linear belts of mafic to ultramafic lithologies (the Coolgardie Group) with intervening felsic rocks (the Black Flag Group) forming a D1[12] anticline modified and repeated by intense D2 faulting and shearing. Flanking the Spargoville Trend to the east, a D2 Shear (possibly the Karramindie Shear) appears to host the Mandilla mineralisation along the western flank of the Emu Rocks Granite, which</td></tr>
</table>

[11] D2 – Propagation of major crustal NNW thrust faults.

[12] D1 – Crustal shortening.

For personal use only

For personal use only

Criteria	JORC Code Explanation	Commentary
		has intruded the felsic volcanoclastic sedimentary rocks of the Black Flag Group. This shear can be traced across the region, with a number of deflections present. At these locations, granite stockworks have formed significant heterogeneity in the system and provide structural targets for mineralisation. The Mandilla mineralisation is interpreted to be such a target. **Local Geology and Mineralisation** Mandilla is located along the SE margin of M15/96 extending into the western edge of M15/633. It comprises an east and west zone, both of which are dominated by supergene mineralisation between 20 and 50 m depth below surface. Only the east zone shows any significant evidence of primary mineralisation, generally within coarse granular felsic rocks likely to be part of the granite outcropping to the east. Minor primary mineralisation occurs in sediments. The nature of gold mineralisation at Mandilla is complex, occurring along the western margin of a porphyritic granitoid that has intruded volcanoclastic sedimentary rocks. Gold mineralisation appears as a series of narrow, high grade quartz veins with relatively common visible gold, with grades over the width of the vein of up to several hundreds of grams per tonne. Surrounding these veins are lower grade alteration haloes. These haloes can, in places, coalesce to form quite thick zones of lower grade mineralisation. The mineralisation manifests itself as large zones of lower grade from ~0.5 – 1.5g/t Au with occasional higher grades of +5g/t Au over 1 or 2 metres. Further to the west of Theia close to the mafic/sediment contact a D2 shear sub parallels the Mandilla shear. Quartz veining and sulphides have been identified within the sediments close to the contact with high mag basalt within sheared siltstones and shales. In addition to the granite-hosted mineralisation, a palaeochannel is situated above the granite/sediment contact that contains significant gold mineralisation. An 800 m section of the palaeochannel was mined by AAR in 2006 and 2007, with production totalling 20,573 ounces.
Drill hole Information	• *A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:* • *easting and northing of the drill hole collar* • *elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar* • *dip and azimuth of the hole* • *down hole length and interception depth* • *hole length.* • *If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.*	This Information has been summarised in Table 3, Table 4 and Table 5 of this ASX announcement.
Data aggregation methods	• *In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.* • *Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.*	No data aggregation methods have been used. A 100ppb Au lower cut off has been used to calculate grades for AC drilling A 0.3g/t Au lower cut off has been used to calculate grades for RC & diamond drilling, with maximum internal dilution of 5m. For the broader interval of 358.23m at 1.03 g/t Au from 256.17m the same lower Au cut-off was used with a maximum internal dilution of 13m recorded. A cutoff grade of >0.5g*m has been applied for reporting purposes in the tables of results. This has not been applied.

Criteria	JORC Code Explanation	Commentary
	• *The assumptions used for any reporting of metal equivalent values should be clearly stated.*	
Relationship between mineralisation widths and intercept lengths	• *These relationships are particularly important in the reporting of Exploration Results.* • *If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.* • *If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').*	The overall mineralisation trend strikes to the north-west at about 325°, with a sub-vertical dip. However, extensive structural logging from diamond core drilling of the quartz veins within the mineralised zones shows that the majority dip gently (10° to 30°) towards SSE to S (160° to 180°). The majority of drilling is conducted at an 040 azimuth and 60° dip to intersect the mineralisation at an optimum angle. A number of deeper holes have been oriented drilled at -60 to150°. The Hestia mineralisation is associated with a shear zone striking around 350°. The drill orientation at 090 azimuth and 60° dip is optimal for intersecting the mineralisation.
Diagrams	• *Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.*	Please refer to the maps and cross sections in the body of this announcement.
Balanced reporting	• *Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.*	Balanced reporting has been applied.
Other substantive exploration data	• *Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.*	Geotechnical drilling to support the Mandilla PFS (June 2025) has been completed. With special coverage and lineal metres drilled being adequate to provide good coverage of the oxide, transitional and fresh domains across the rock units hosting the Mandilla deposits. Three phases of Metallurgical testing were completed to support he Mandilla PFS (June 2025), subsequently additional metallurgical testing has been commissioned to support the currently underway DFS scope of work. Over 40 unique metallurgical gravity and leach tests have been conducted on the Mandilla deposits
Further work	• *The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).* • *Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.*	Further geotechnical work across the Mandilla deposits has been undertaken to support the Mandilla DFS. Additional metallurgical testing is in progress to support the Mandilla DFS Further in-fill drilling at Theia Stage 1 and Stage 2 is being undertaken. Deep diamond drill tests at Theia are also underway to determine the scale of the mineral system.

For personal use only