

TIMING IS EVERYTHING

Growing a multi-generational lithium pipeline



EUROZ HARTLEYS


ROTTNEST INSTITUTIONAL CONFERENCE

ASX | WC8
MARCH 2026

CORPORATE SNAPSHOT



For personal use only

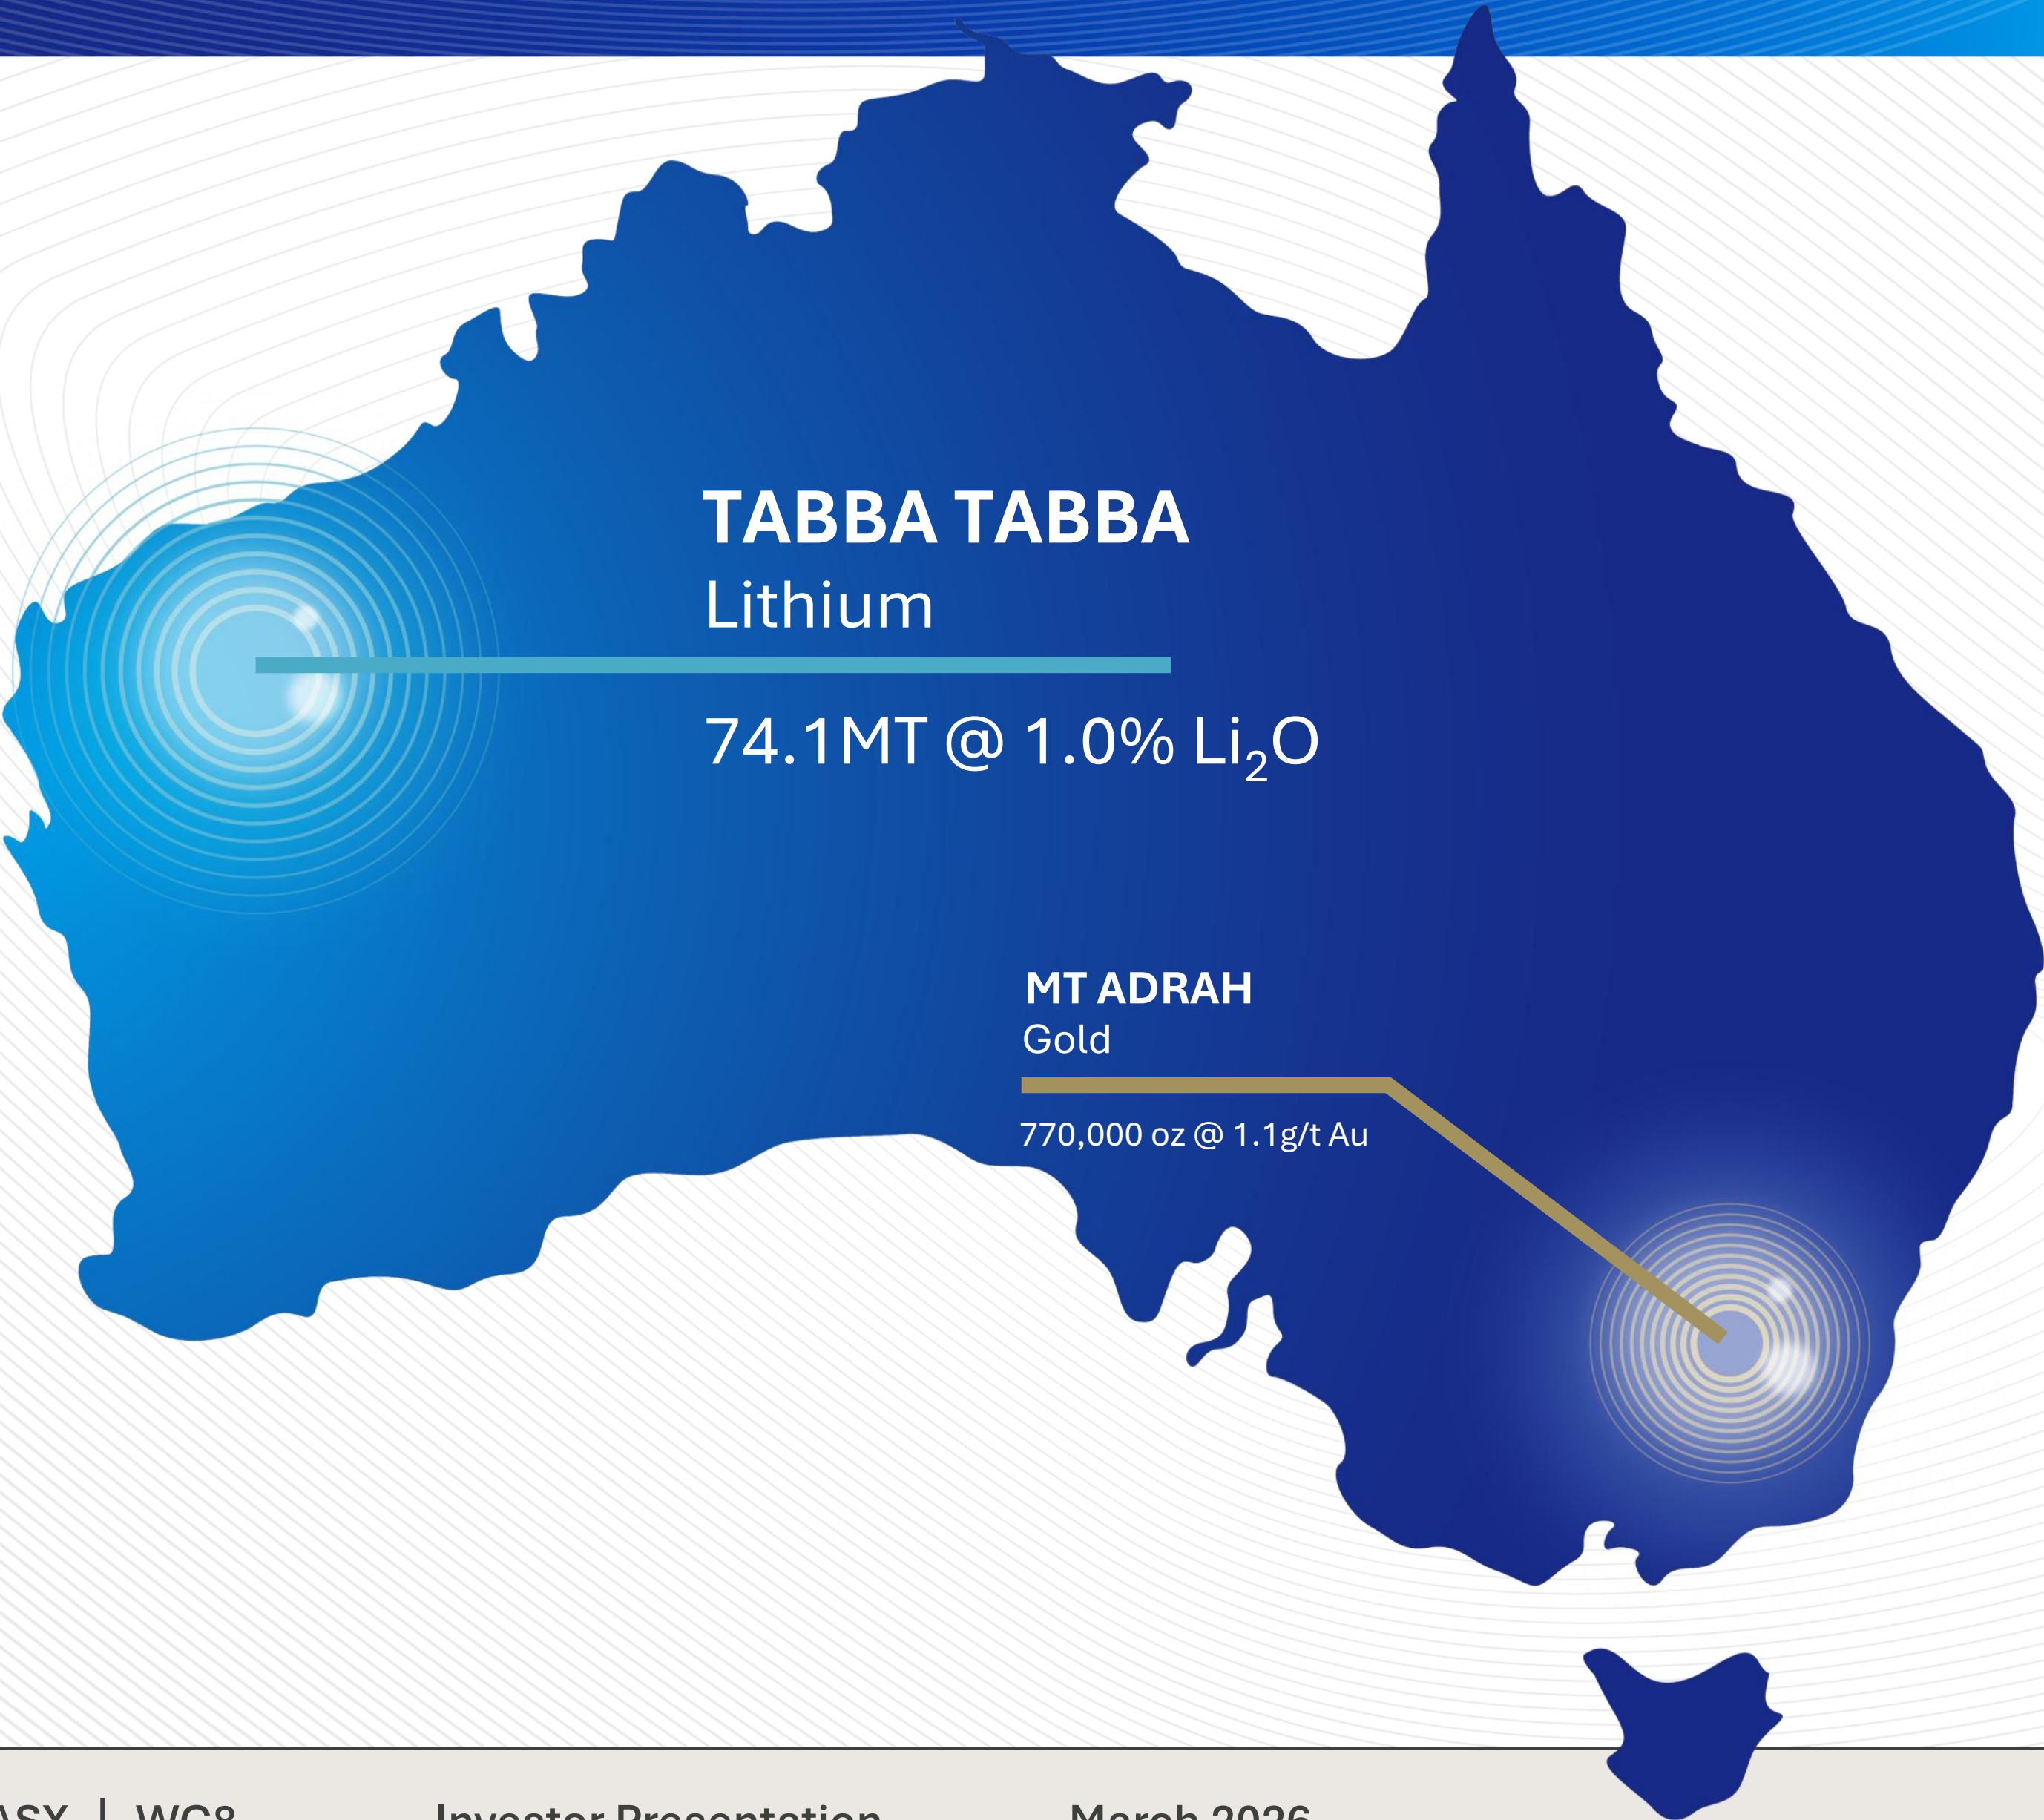

SHARES

WC8

ASX CODE

1,339M

SHARES ON ISSUE

\$560M

MARKET CAP AT 42c

\$48.5M

CASH AT BANK
(31 Dec 2025)

~18% owned by Management

RESEARCH COVERAGE

ShawandPartners
Financial Services

\$1.20

EUROZ HARTLEYS
GROUP

\$0.61

ARGONAUT

\$1.10

Barrenjoey*

\$0.65

cg/
Canaccord Genuity

\$0.75

BOARD OF DIRECTORS & MANAGEMENT



JEFF ELLIOTT

NON-EXECUTIVE CHAIRMAN

- +30 yrs exploration, mining and business management experience
- Former MD of international mining consultants CSA Global
- Co-founder of several successful private companies across mining services



FIONA VAN MAANEN

NON-EXECUTIVE DIRECTOR

- 30 yrs of experience in accounting, financial management, corporate governance and M&A transactions
- Former CFO & Company Secretary of Metals X
- NED of Westgold Resources, Pantoro Resources and Hot Chili Limited
- Certified Practicing Accountant



SAMUEL EKINS

NON-EXECUTIVE DIRECTOR

- Geologist with 20+ yrs of exploration and mining experience
- Led Wildcat at the time of acquisition to discovery
- Involved in business development and project generation



MATTHEW BANKS

EXECUTIVE DIRECTOR

- Joint founder of Wildcat Resources
- Has been involved in many value add transactions including Spectrum Metals and Delta Lithium
- Joint founder of Rumble Resources
- Background in finance and key market facing executive



AJ SAVERIMUTTO

MANAGING DIRECTOR

- 25+ yrs of corporate and mining operational experience
- Former Mine Manager of the Grasberg Mine
- Mining engineer and accountant
- Extensive involvement in ASX companies and NED of Grange Resources



JAIRO BERNAL

**CHIEF FINANCIAL OFFICER
JOINT COMPANY SECRETARY**

- 25 yrs global experience in lithium and energy transition across Australia and International Markets
- Executed large acquisition and project financial strategies
- Former SQM Asia Pacific Finance executive and NED of Azure Minerals Ltd



TORRIN ROWE

GEOLOGY MANAGER

- Experienced geologist with specialised experience in progressing greenfields projects to pre-mining in several jurisdictions
- Recipient of AMEC drill hit of the year and exploration manager of the year
- Completing Masters in LCT mineralisation in the Pilbara



JAMES DORNAN

PROJECT DIRECTOR

- 15+ years mining & resources experience in environmental approvals & technical studies
- Key member in the ~A\$1.70B sale of Azure Minerals
- Ex Project Manager Azure Minerals Ltd.



INVESTOR SNAPSHOT

ADVANCED AND DEVELOPMENT READY



CLOSE TO PORT (80km) / MINING LEASE
(Previously mined for tantalum)



LOW-COST OPERATION
US\$ 541/t (lowest quartile C1 cost)



LARGE, HIGH CONFIDENCE MAIDEN RESOURCE
(94% Indicated)




100% OFFTAKE UNENCUMBERED
and fully funded to FID




EXPLORATION pipeline to build production profile



EXCELLENT PFS FINANCIALS
Tabba Tabba DFS well advanced

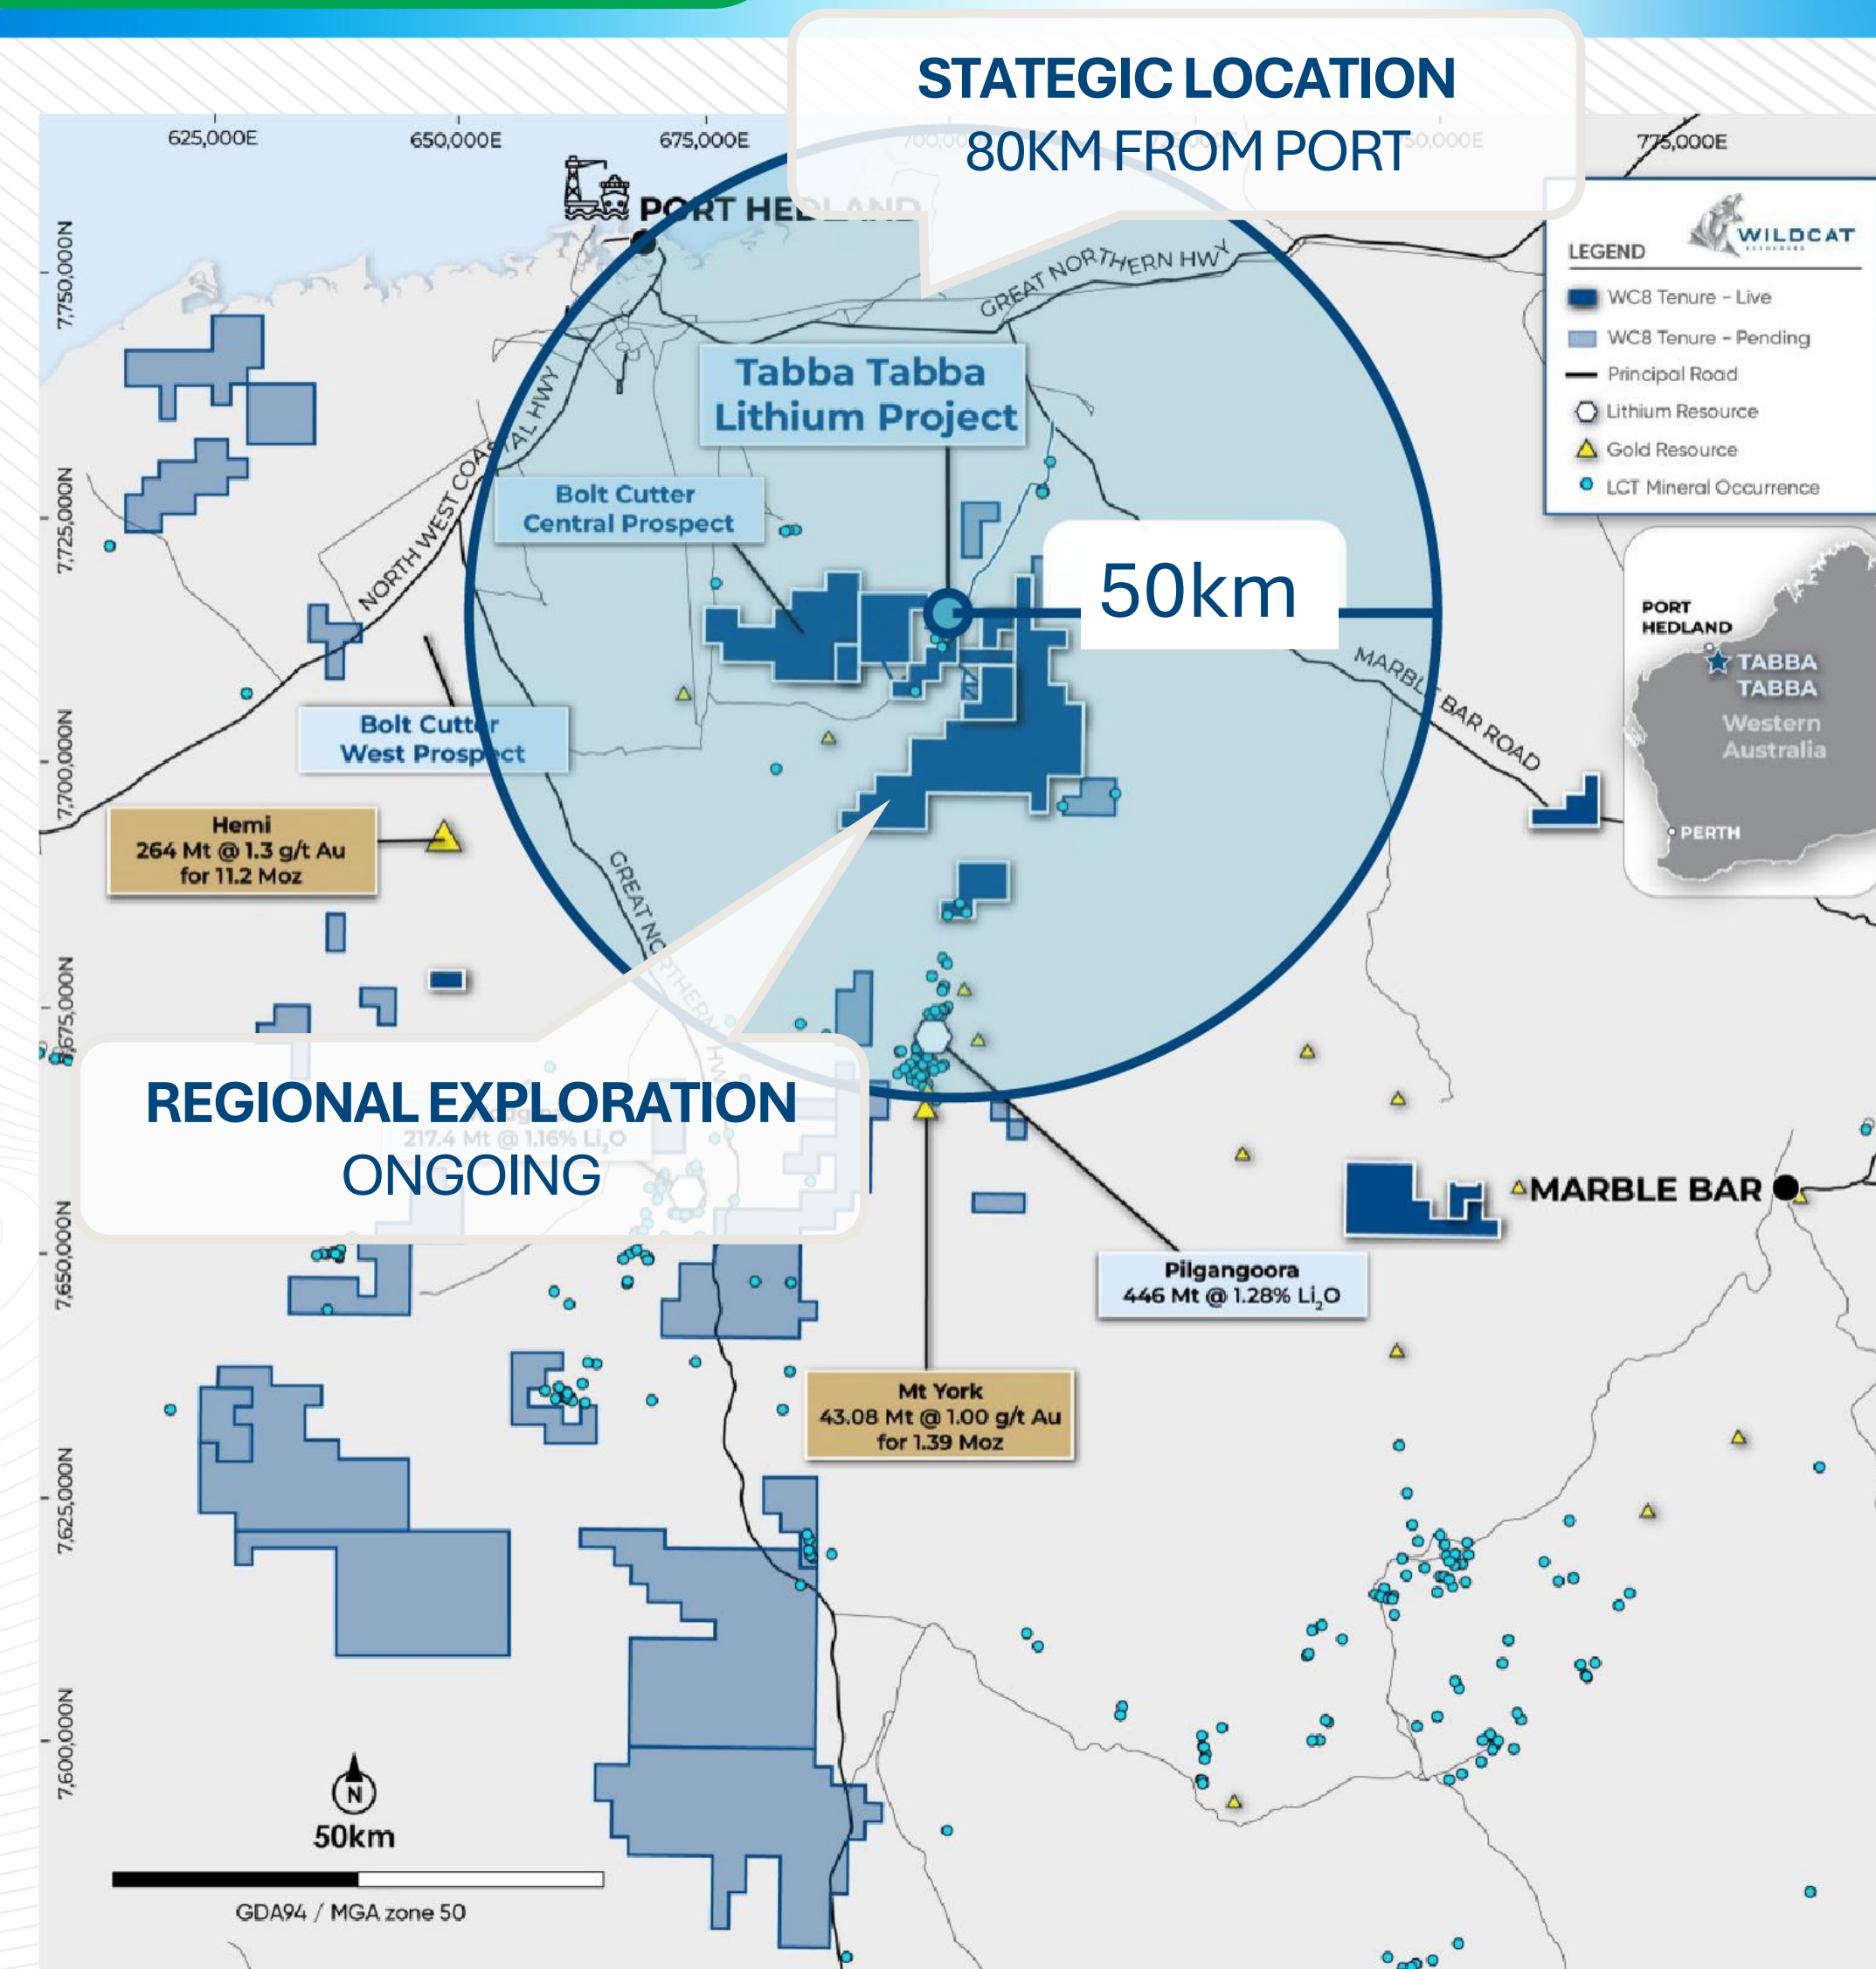

TABBA TABBA KEY DRILLING HIGHLIGHTS

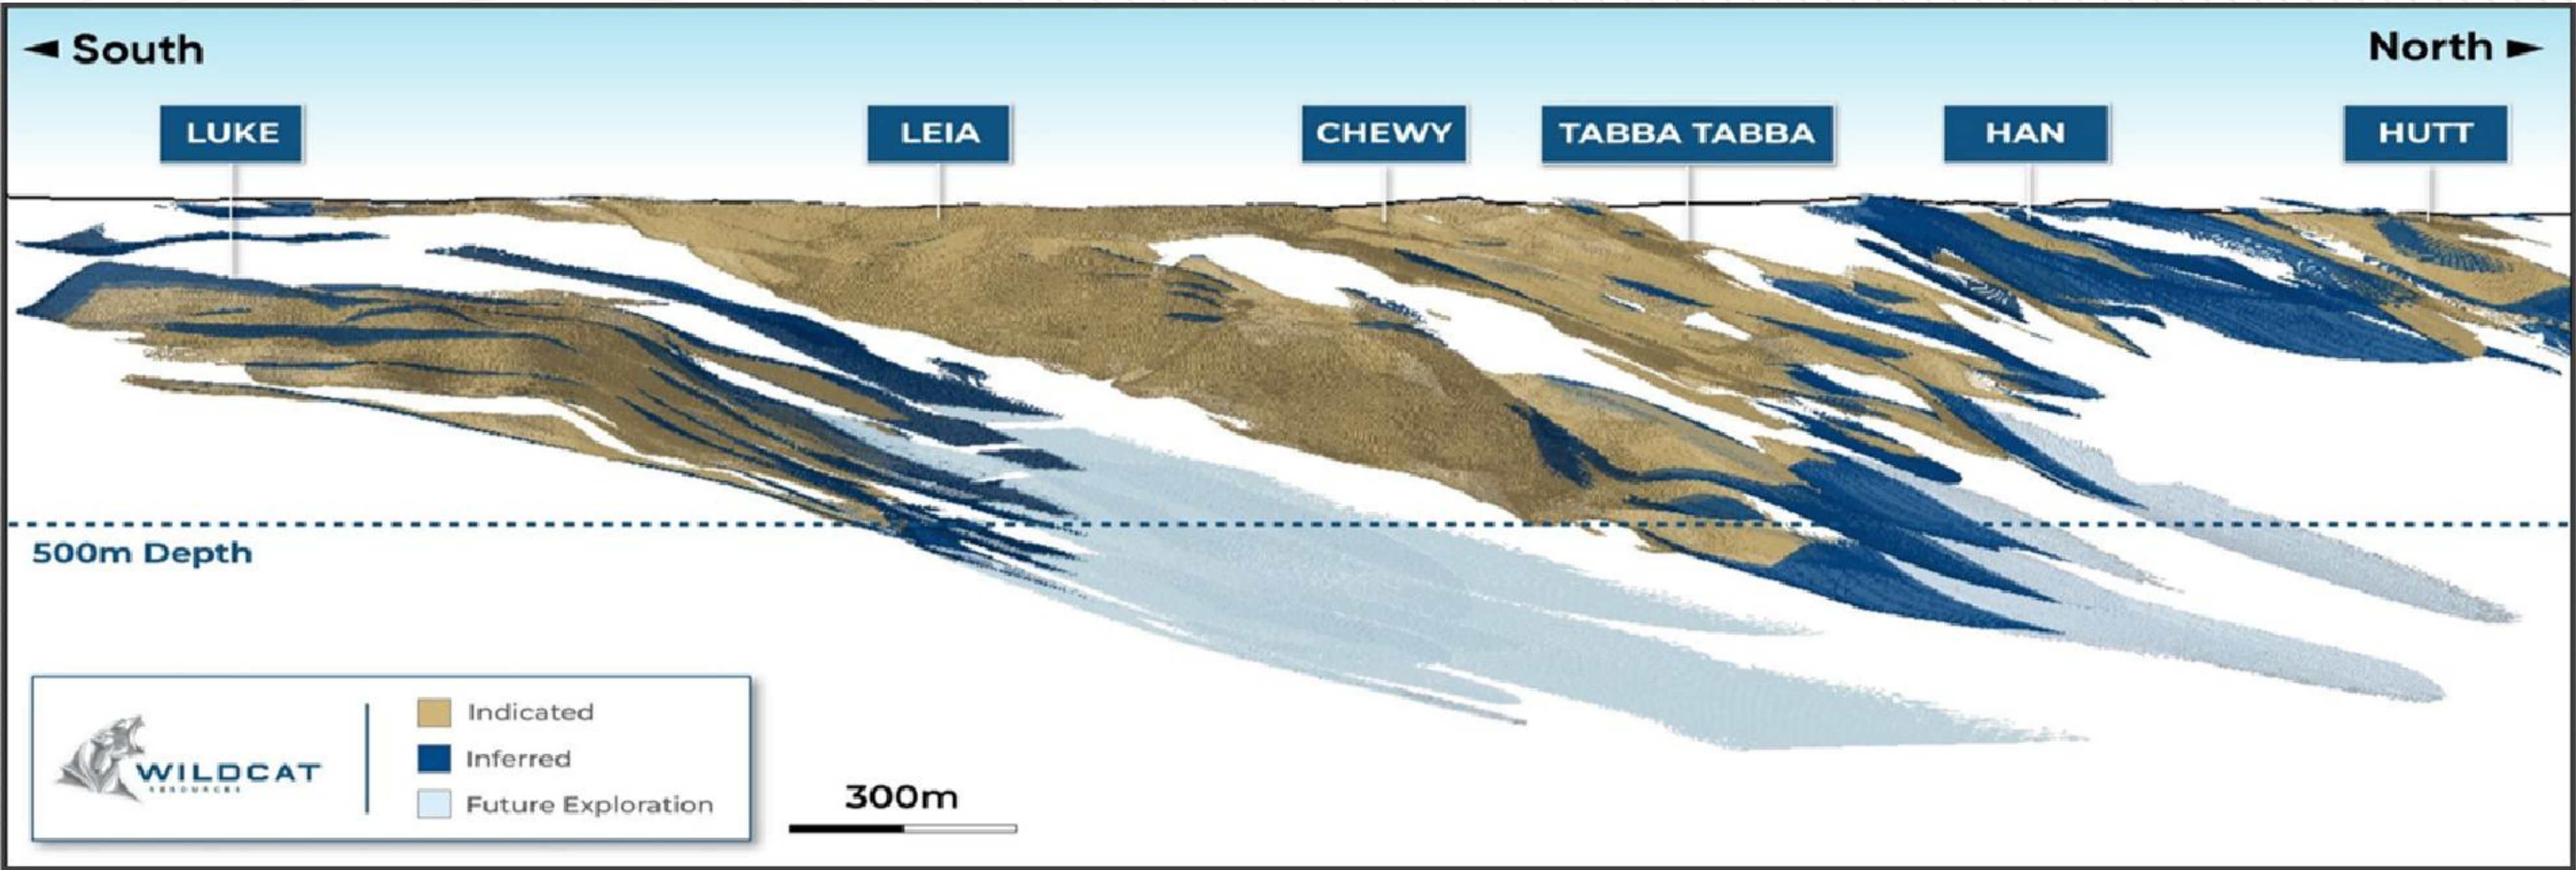

LUKE

- 54.4m @1.2% Li_2O from 267.9m (TADD030) (est. true width)
- 50.0m @1.1% Li_2O from 178.0m (TADD035) (est. true width)
- 61.0m @1.1% Li_2O from 227.0m (TARC350D) (37.8m est. true width)
- 43.0m @1.4% Li_2O from 316.0m (TARC348D) (est. true width)
- 44.0m @1.1% Li_2O from 189.0m (TARC353) (29.0m est. true width)

LEIA


- 180.0m @1.1% Li_2O from 206.0m (TARC148) (est. true width)
- 119.2m @1.0% Li_2O from 334.3m (TADD010) (est. true width)
- 105.3m @1.1% Li_2O from 213.7m (TARC259AD) (est. true width)
- 110.0m @1.2% Li_2O from 195.0m (TAMT033) (est. true width)
- 99.0m @1.2% Li_2O from 207.0m (TARC234D) (est. true width)

CHEWY

- 39.0m @ 1.3% Li_2O from 28.0m (TARC150) (est. true width)
- 33.0m @ 1.4% Li_2O from 29.0m (TAMT019) (est. true width)
- 19.0m @ 1.7% Li_2O from 40.0m (TARC222D) (est. true width)
- 22.0m @ 1.1% Li_2O from 2.0m (TARC128) (est. true width)
- 15.0m @ 1.6% Li_2O from 305.0m (TARC383) (est. true width)

For personal use only

BOLT CUTTER SECOND GROWTH ENGINE

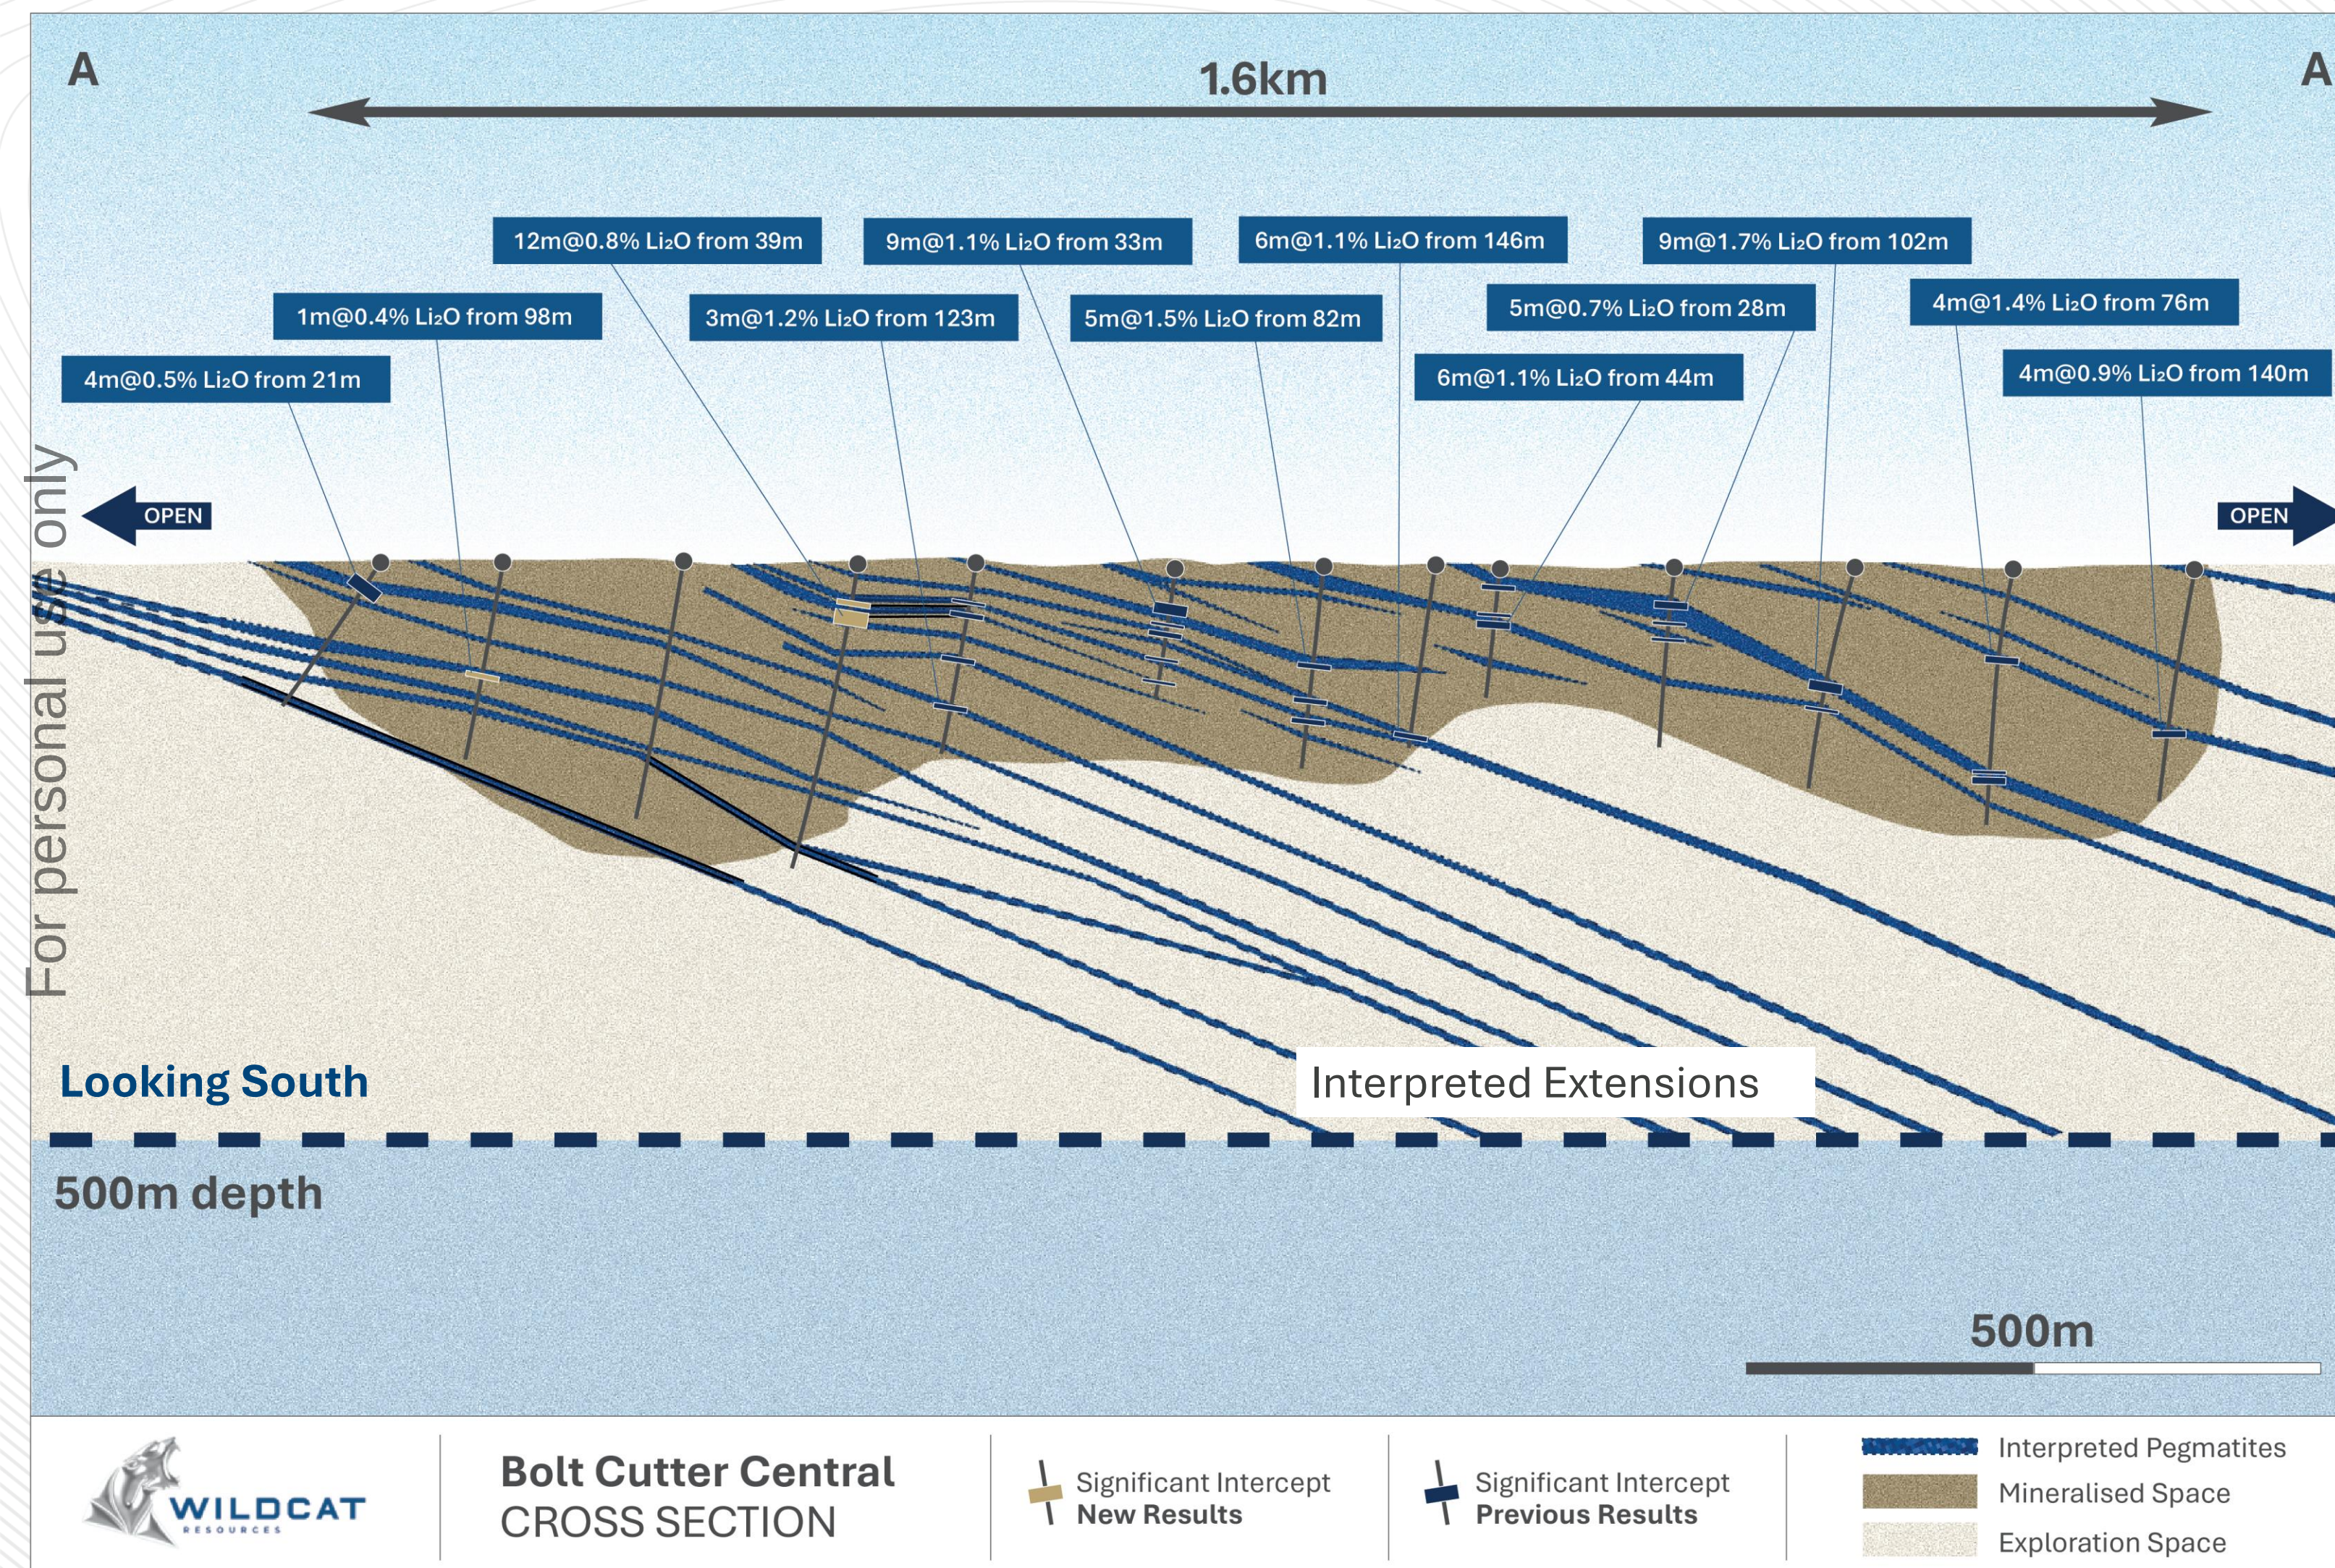

BOLT CUTTER


- 20.0m @1.7% Li₂O** from 43.0m (BCRC002) (12.0m est. true width)
- 12.8m @2.0% Li₂O** from 45.3m (BCDD001) (est. true width)
- 12.0m @1.7% Li₂O** from 90.0m (BCRC034) (est. true width)
- 13.0m @1.4% Li₂O** from 90.0m (BCRC003) (est. true width)
- 13.0m @1.3% Li₂O** from 40.0m (BCRC007) (est. true width)

- ✓ Stacked pegmatites system
- ✓ ~10km West of Tabbata Tabbata
- ✓ >2km strike (NW) up to 800m (NE)
- ✓ Spodumene Intersections
- ✓ System open in most directions

WILDCAT PROGRESS AND DELIVERY



For personal use only

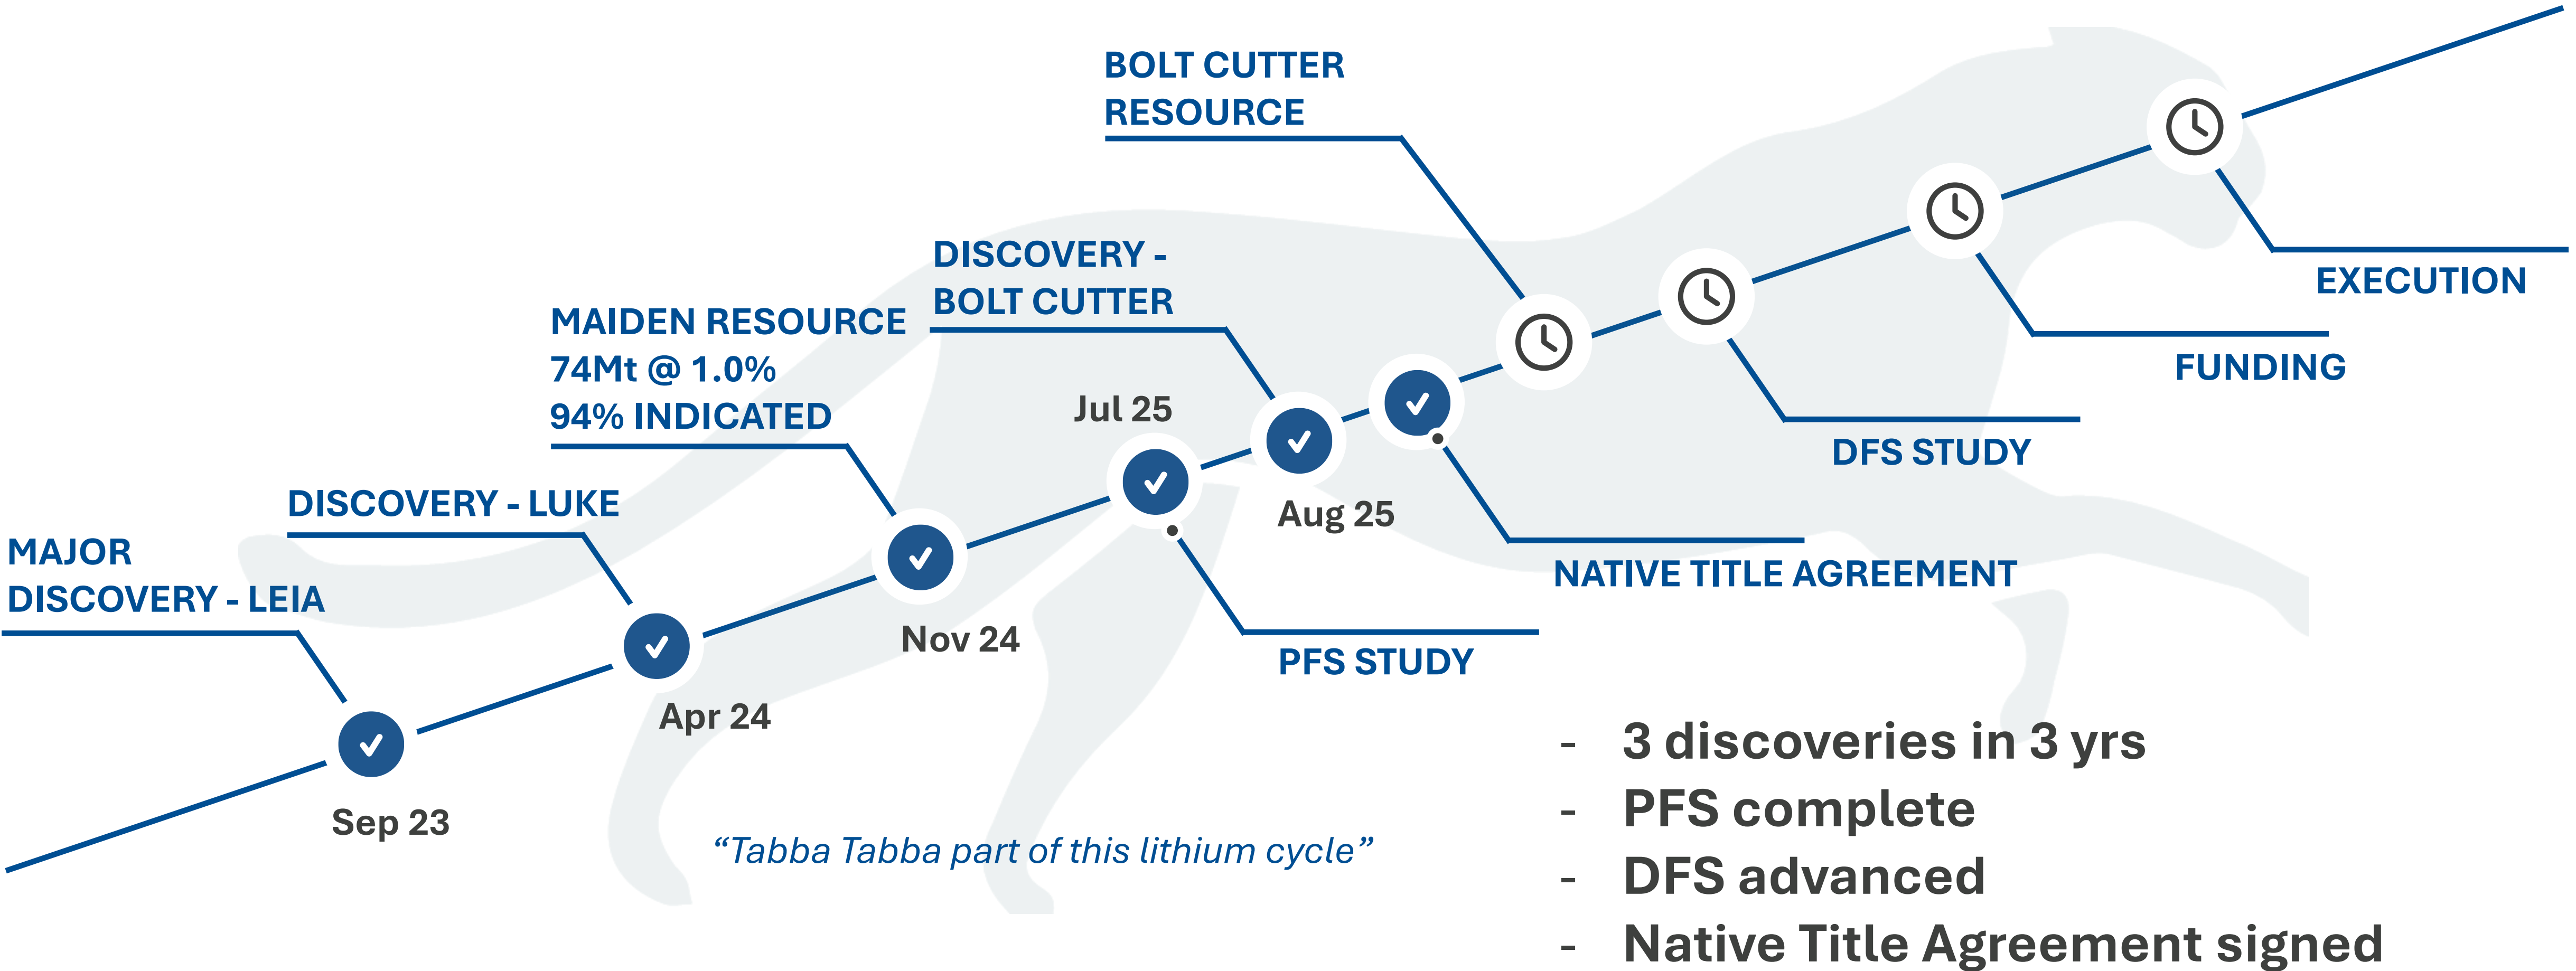


SIGNIFICANT TONNES PER VERTICAL METRE

– SUPPORTS LARGE SCALE OPEN PIT MINING



For personal use only

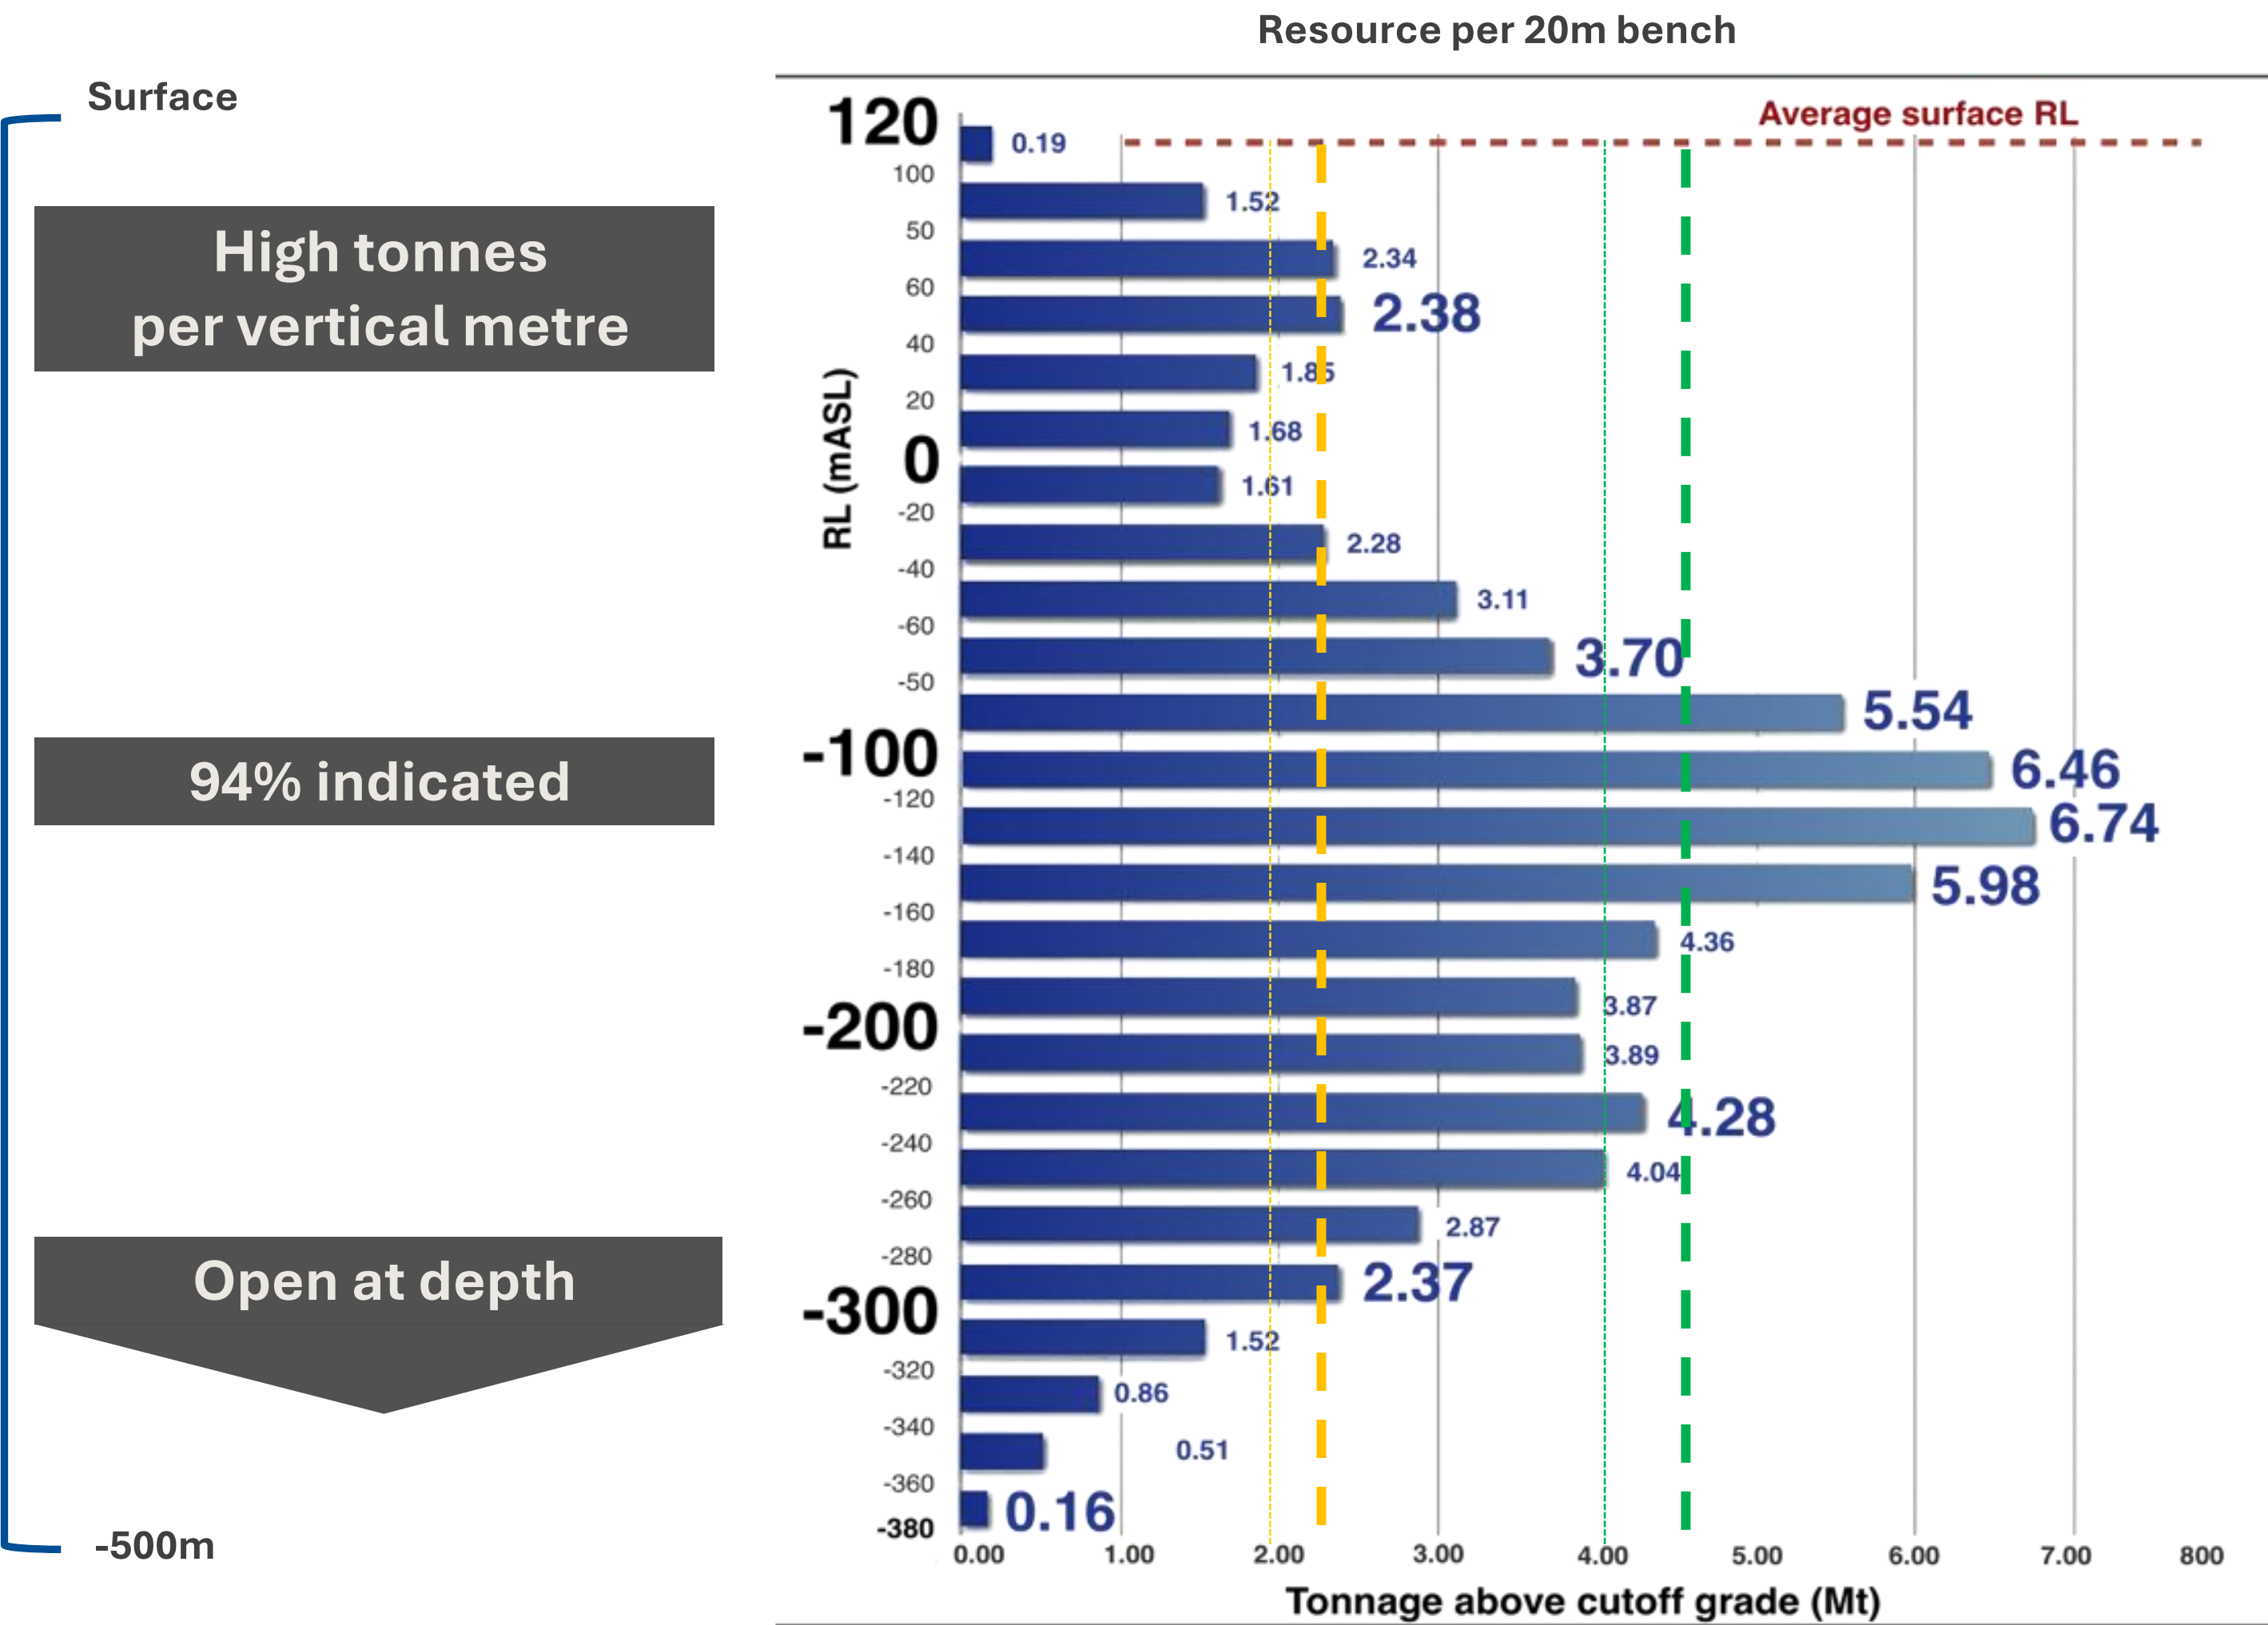

	Tonnes (Mt)	Li ₂ O (%)
Indicated	70.0	1.01
Inferred	4.1	0.76
Total	74.1	1.00

~90Mt Tonnes above cut-off grade of 0.3%* Li₂O

* Potential Mining Cutoff Grade


Average Recovery ~77%

PFS Avg. Recovery ~74%

COMPELLING PFS ECONOMICS

A CYCLE RESILIENT PROJECT WITH STRONG MARGINS

US\$ 1,384



~A\$ 1.2bn

Post-tax NPV8


~A\$ 3.2bn

Post-tax FCF

IRR 23%

Post-tax IRR

US\$ 2,000



~A\$ 2.9bn

Post-tax NPV8

~A\$ 6.5bn

Post-tax FCF

IRR 40%

Post-tax IRR

CATEGORY	UNIT	FLOOR	PFS	CURRENT SPOT PRICE	LT	UPSIDE
Spodumene Price - FOB	US\$/t	\$1,000	\$1,384 - PFS	\$2,000	\$2,500	\$3,000
FX – AUD:USD	\$	0.7	0.7	0.7	0.7	0.7
Free Cashflow LOM (Post-Tax)	A\$ m	1,300	3,200	6,500	9,100	11,800
NPV 8% Real (Post-Tax)	A\$ m	1,130	1,190	2,860	4,210	5,550
IRR	%	10%	22.90%	40%	54%	67%
PAYBACK (After Tax)	Years	8.3	5.4	1.7	0.8	0.4
C1 Cash Cost	US \$/t	541	541	541	541	541
All-In Sustaining Cost	US \$/t	634	658	696	727	758

USD 1,384 is the broker consensus long term pricing – July 25

TABBA TABBA DFS AND BEYOND – VALUE UPSIDE OPPORTUNITIES

DFS

☐ Adjoining **Tenement acquisition**

- Reduced haulage distance – Reduced Opex

☐ **Plant and Mine design** optimisation

- Optimise mining scenario to maximise profitability
- Additional Chewy and potentially Han, Hutt to mine plan


☐ Include new **Geotech** drilling

- ☐ Optimise pit design
- ☐ Underground stope design

Post DFS


☐ Potential additional mine life

- ☐ Bolt Cutter
- ☐ Tabbatabba Deeps
- ☐ Exploration targets

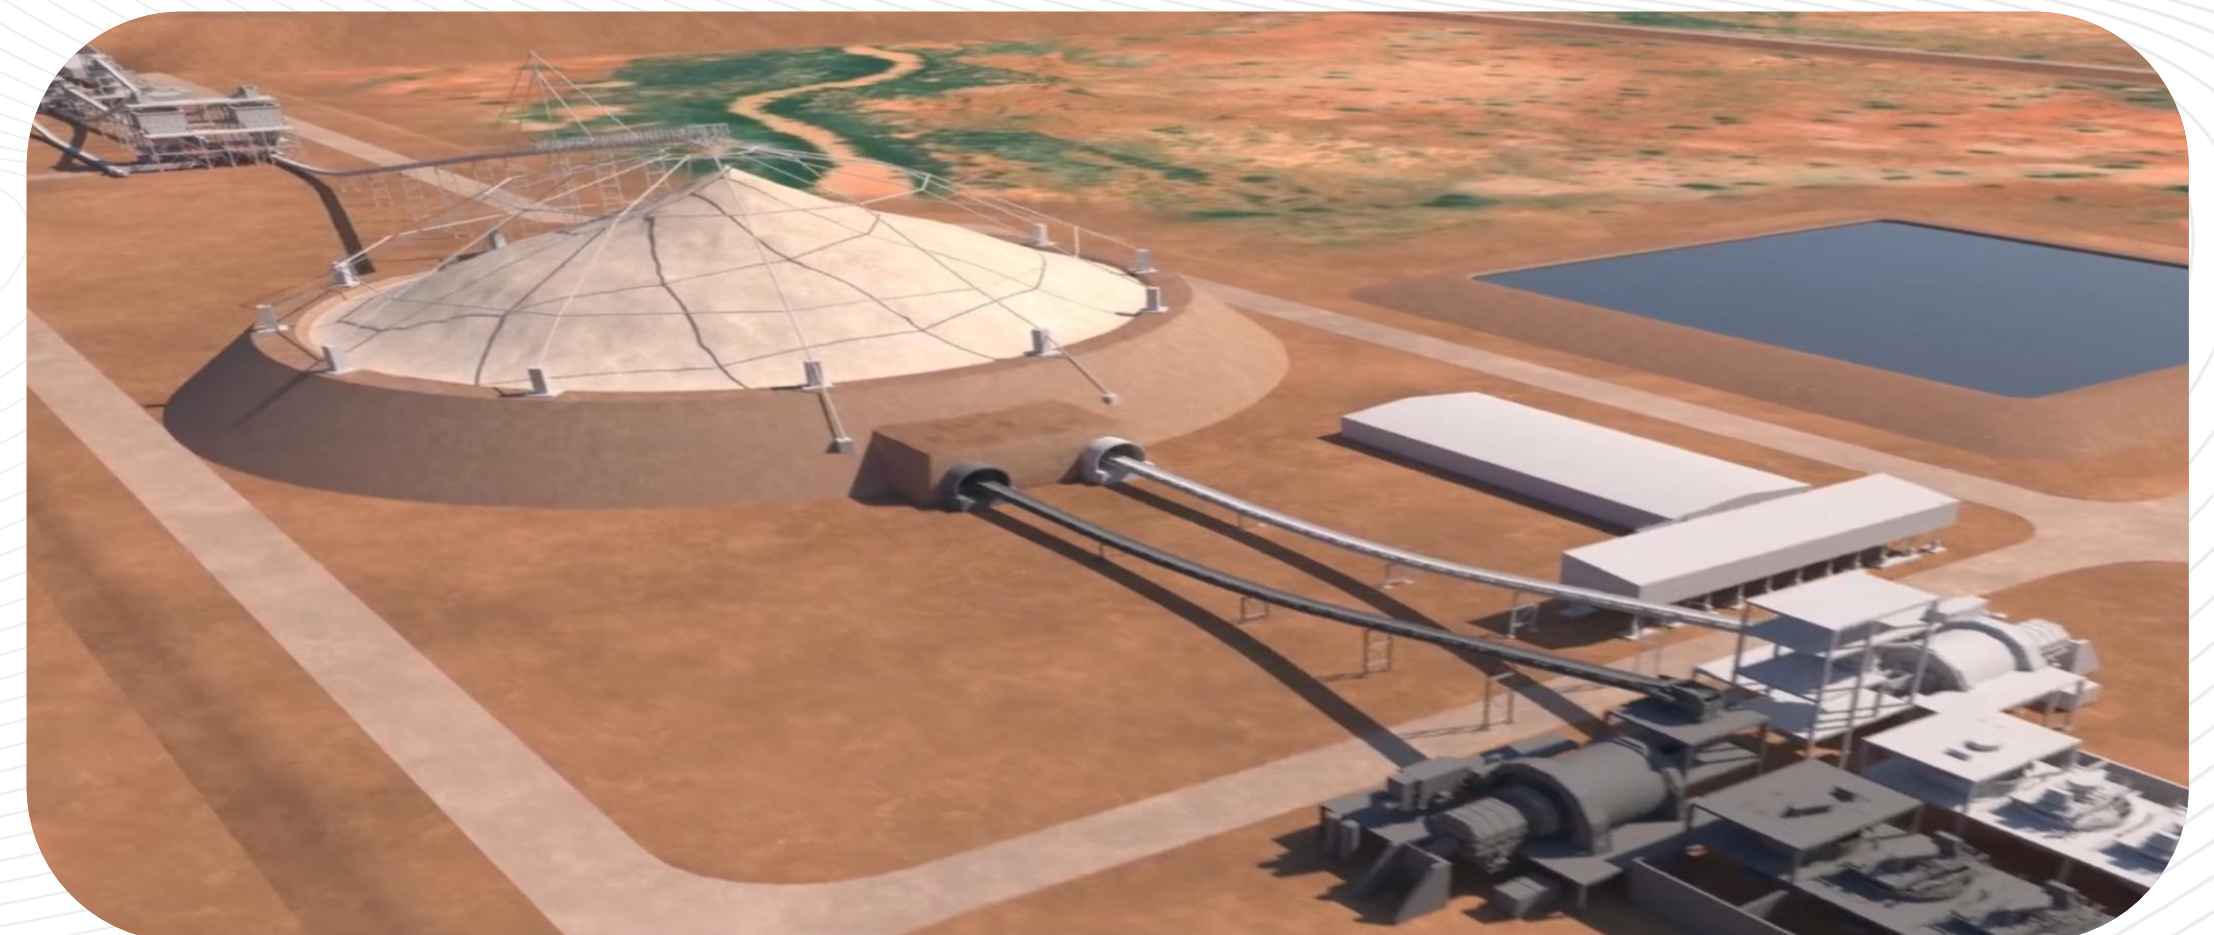

PRODUCTION TIMING MEETS DEMAND

GLOBAL DEMAND AND SUPPLY (Mt LCE)

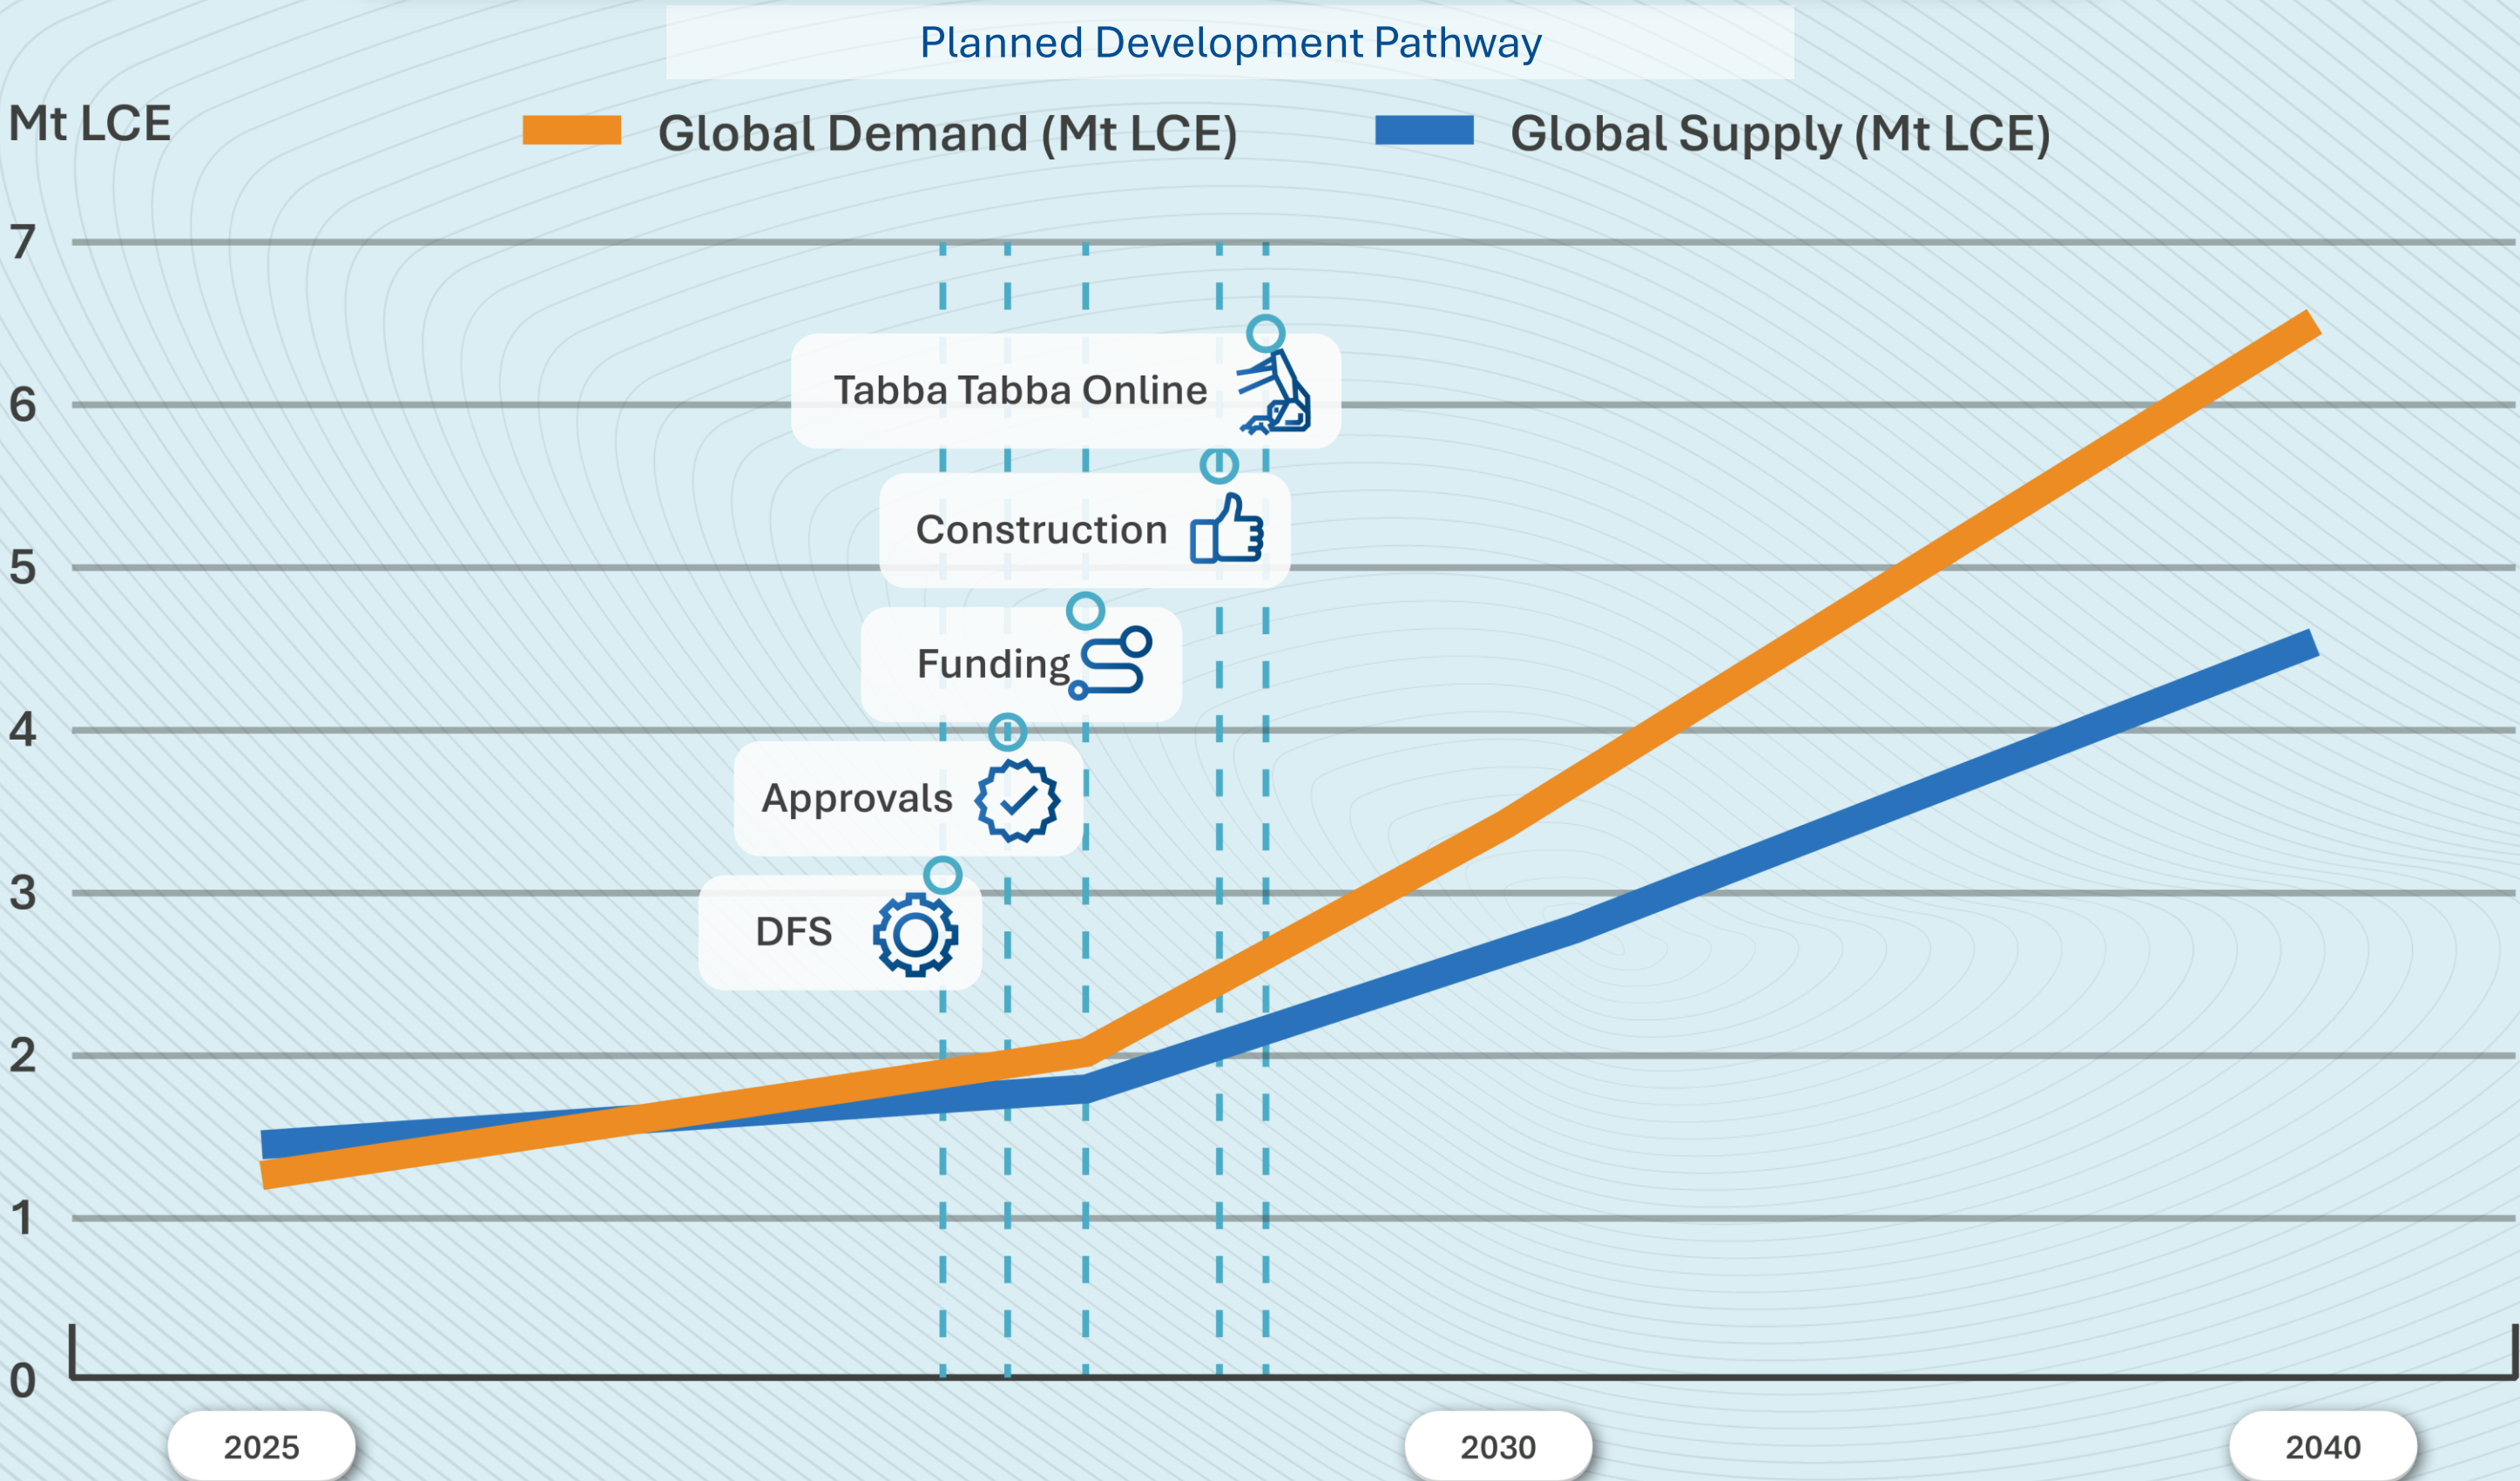

Source: Benchmark Mineral Intelligence Lithium Fostering to 2040; SRP Global: Supply Demand GNP & Investment Analysis; Reuters Industry – Company Level Insights; Rio Tinto Albergale, etc; Pilsbury Law Regulatory Outlook For Lithium Supply Chains

DEMAND DRIVERS


EV growth



Grid-scale battery storage



AI / data center energy demand

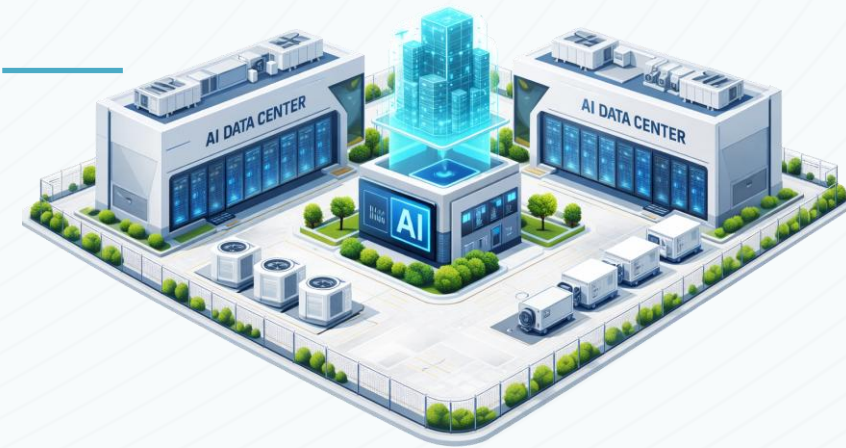

DISCIPLINED, FLEXIBLE FUNDING STRATEGY



Our approach is to **optimise** the funding mix to **minimise** dilution, **preserve** project upside, and **accelerate** development.

PLAN FOR CY 26

EXPLORATION

- ✓ Continue **discovery drilling** at Bolt Cutter – unlock system
- ✓ First pass field work on **new targets**
- ✓ **Drill testing** high ranked targets
- ✓ **Potential** to acquire new tenements

STUDIES

- ✓ **Maiden Resource** on Bolt Cutter
- ✓ **DFS** Tabba Tabba
- ✓ Progress **funding** options
- ✓ Progress **offtake** options
- ✓ Lodge Lithium **Environmental Approvals**
- ✓ Commence **early works**



KEY VALUE DRIVERS

RIGHT LOCATION



- **Tier-1 Pilbara, 80km from port**
- **Camp and haul road in place**
- **Commanding land position**
- **Proven regional discovery success (3 discoveries in 3 yrs)**

RIGHT ASSETS



- **Tabba Tabba - Impressive size, scale and quality**
- **Bolt Cutter – Emerging discovery**
- **Exploration upside beyond DFS**
- **Cash balance \$48.5M (31 Dec 25)**

RIGHT TEAM



- **Track record of value creation**
- **Proven discovery and development expertise**
- **Deep capability across financing and project delivery**

TABBA TABBA – ONE OF THE BEST UNDEVELOPED PROJECTS GLOBALLY THAT WILL BE PART OF THIS LITHIUM CYCLE

THANK YOU.

Presented by AJ Saverimutto

info@wildcatresources.com.au

www.wildcatresources.com.au




EUROZ HARTLEYS

ROTTNEST INSTITUTIONAL CONFERENCE

ASX | WC8
MARCH 2026

TABBA TABBA EXPLORATION STRATEGY

BUILDING A 50-YEAR PIPELINE

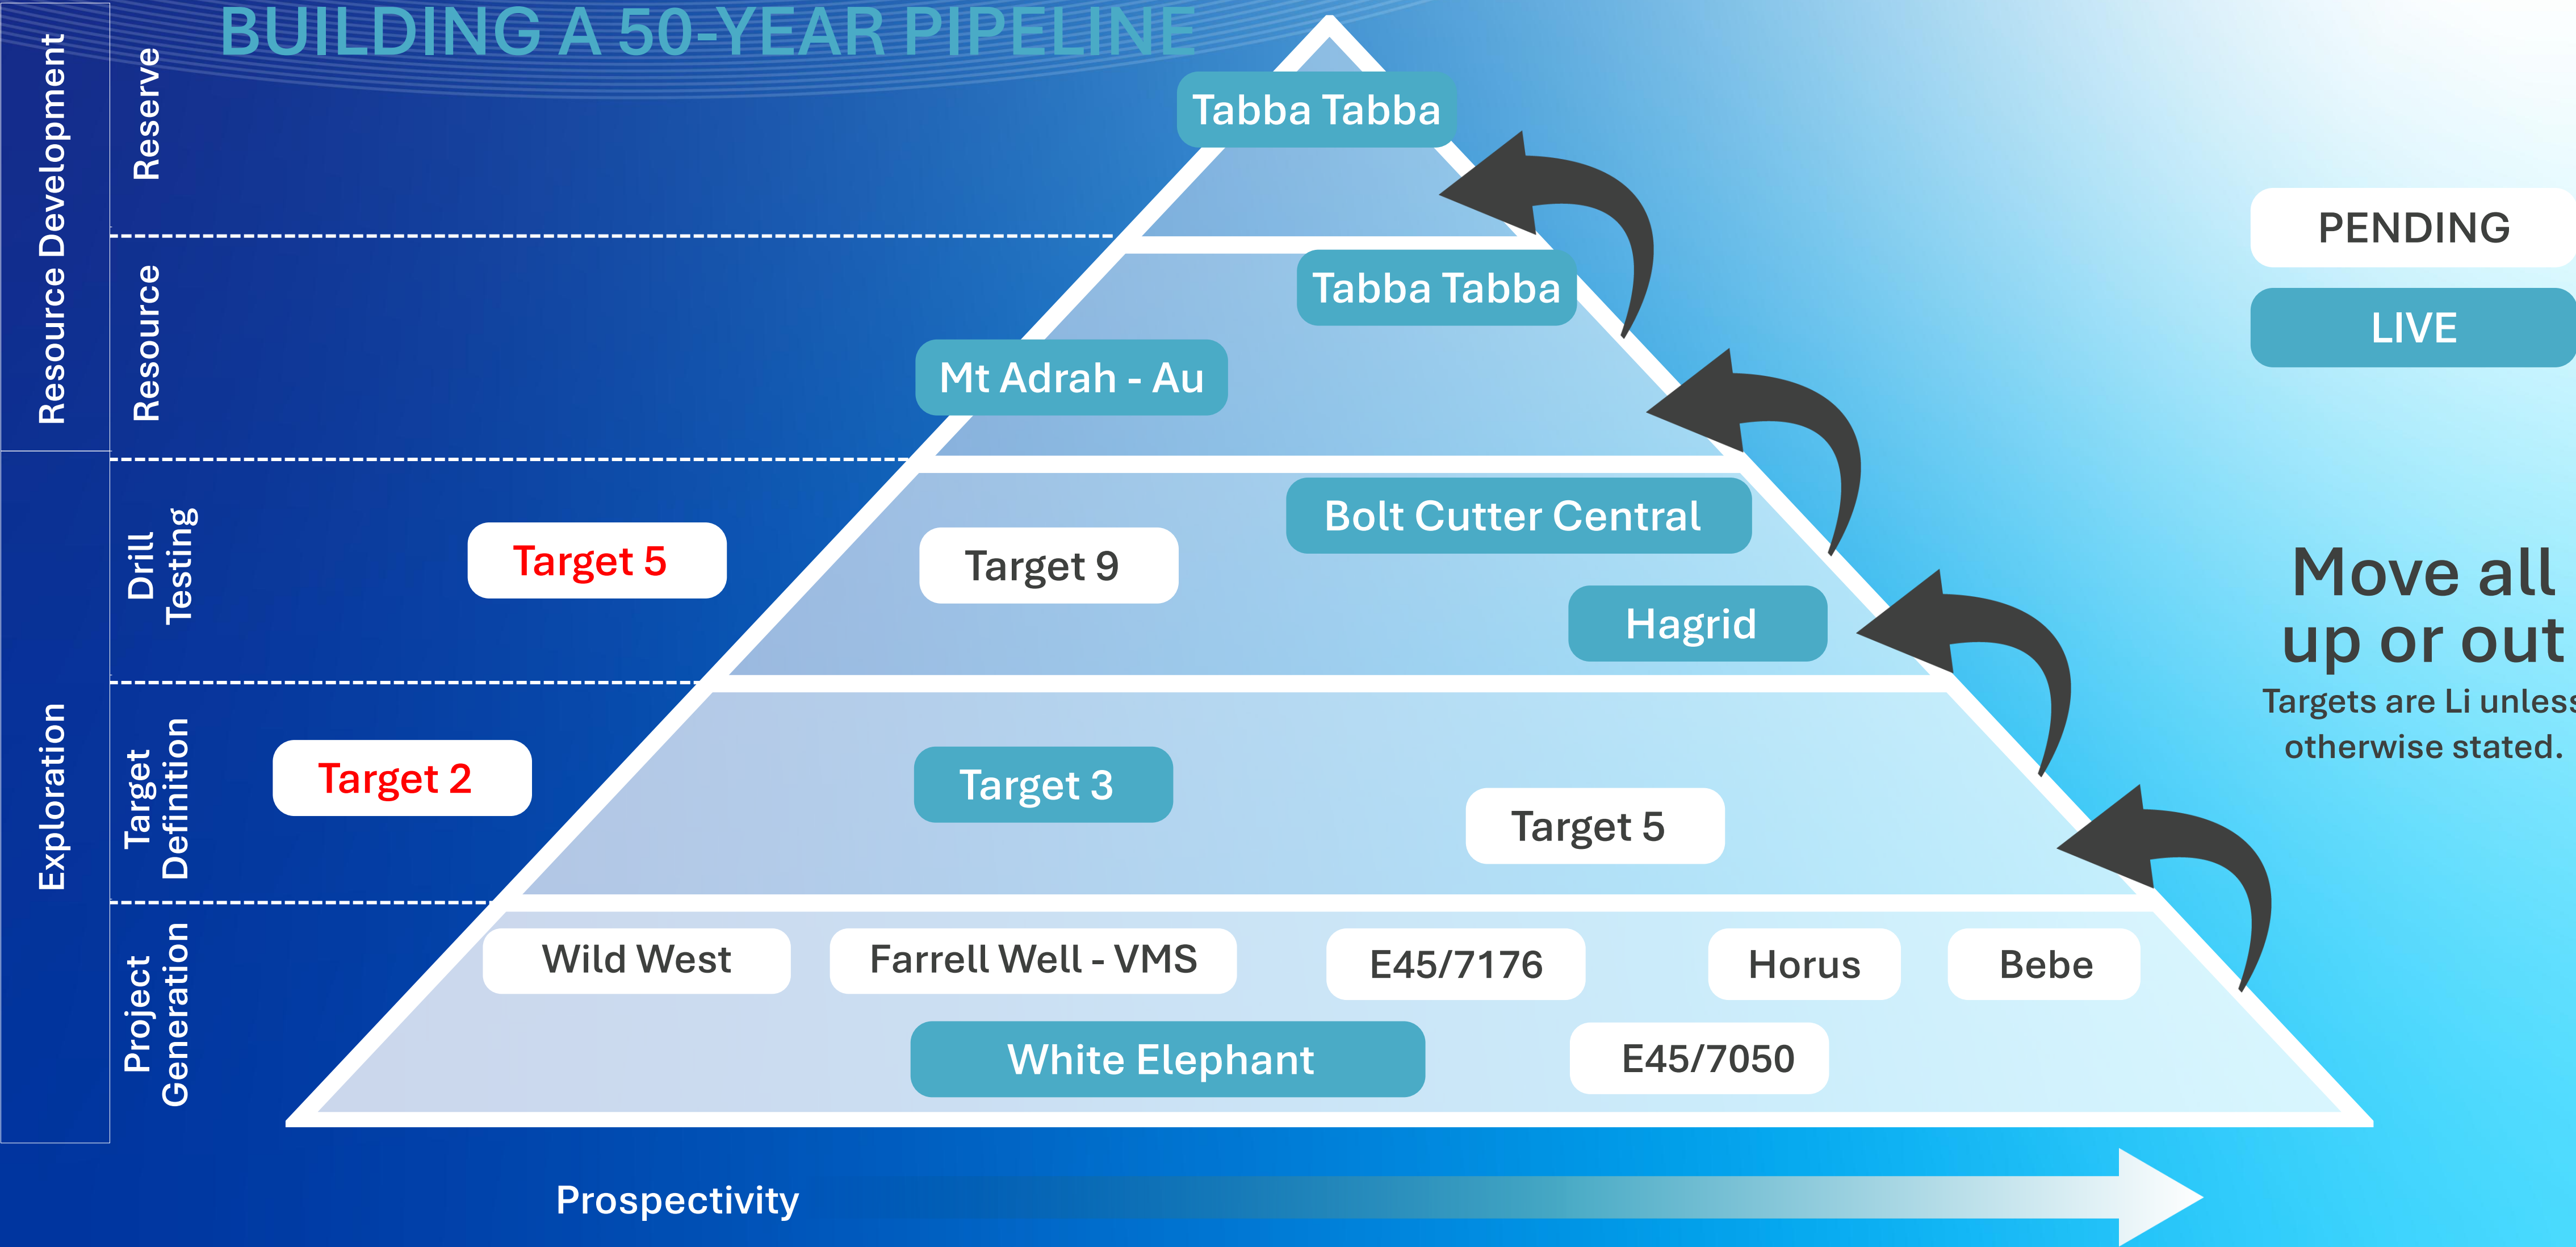

For personal use only

TABBA TABBA PFS OVERVIEW

GLOBAL RESOURCE

74.1Mt @ 1.0% Li₂O (0.45 Li₂O Cut Off)
94% Indicated Mineral Resource

- Leia Resource – 46.8Mt @ 1.05 Li₂O
- Luke Resource – 16.2 @ 0.91 Li₂O

Chewy, Han and Hutt (~10.7Mt), and Tabba Tabba Tantalum (~1.2Mt) not included

ORE RESERVES

46.3Mt @1.0%:

- Open Pit – 36.8Mt @ 1.00 Li₂O
- Underground – 9.5Mt @ 0.94 Li₂O

MINING METHODOLOGY

- Open Pit (79% and early ore) – Leia Orebody
- Underground – Luke, Leia Upper and Leia Lower orebodies
- Long Hole Open Stopping


PROCESSING METHODOLOGY

- Whole of ore flotation
- Product – Spodumene Concentrate (5.5% Li₂O)

KEY METRIC	UNIT	PREFEASIBILITY STUDY
Product	Type	Spodumene Concentrate
Life of Mine (LOM) (excluding Chewy)	Years	+ 17 yrs
Ore tonnes mined	Mt	47
Waste tonnes mined	Mt	285
Strip Ratio (Leia) LOM – (Chewy Waste)	Waste: Ore	7.7:1
Ore Processing Rate (Years 1 to 7)	Mtpa	2.2
Ore Processing Rate (Years 7 onwards)	Mtpa	4.5
Recovery (LOM) (Financial Model / Testwork)	%	74.0 / 77.1
Spodumene Concentrate Produced (Years 1 to 7)	ktpa	295
Spodumene Concentrate Produced (Years 7 onwards)	ktpa	565
Spodumene Concentrate Produced (LOM)	Mt	6.16

PROJECT PLANT - LAYOUT

For personal use only

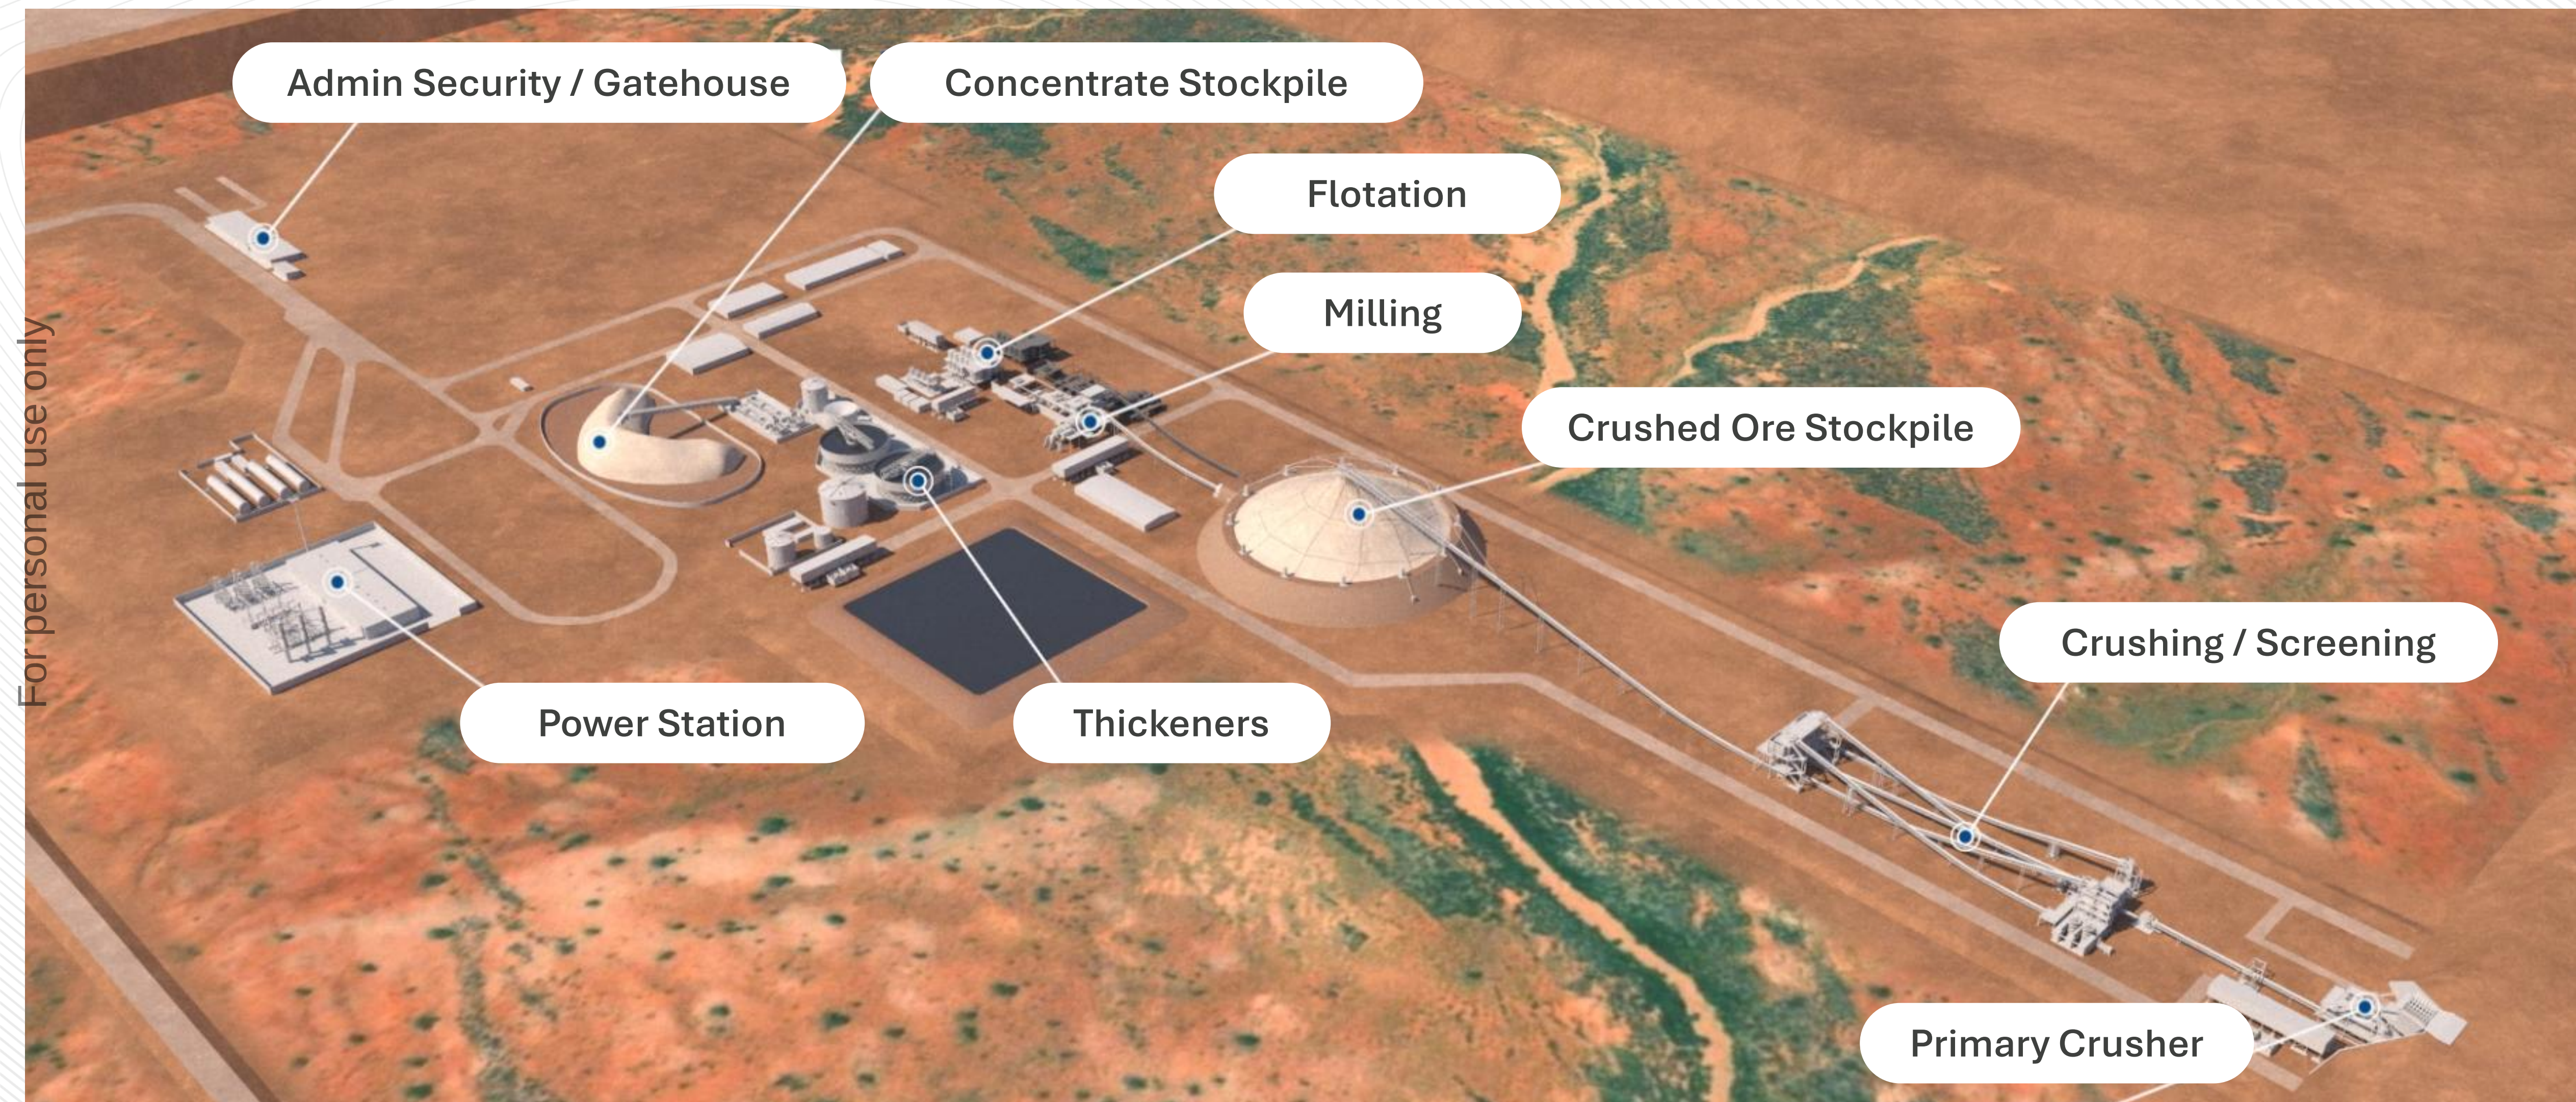

APPROVALS



Tabba Tabba fits within **WA Government's Critical Minerals Strategy**, which provides streamlined approvals process and Government support (**Green Energy Major Projects**)

Wildcat was invited to apply for Federal Government **Major Project Status** and has submitted its application

EP ACT

- Targeting Part IV – Assessment on Referral Information (ARI)
- Part V approvals to be completed in parallel

EPBC ACT

- Referral under the EPBC Act is expected to be required
- An EPBC Act referral automatically triggers an EP Act Part IV referral

MINING ACT

- Additional general purpose leases and miscellaneous licence applications underway

KEYS INPUTS TO THE APPROVALS PROCESS

- Early engagement with key regulators (DEMIRS, DWER, JTSI and EPA) – In progress
- Detailed and comprehensive environmental monitoring and surveying completed
- A mature and well defined project definition

MINERAL RESOURCE



Category	Tonnes (Mt)	Li ₂ O (%)	Ta ₂ O ₅ (ppm)	Fe ₂ O ₃ (%)	Li ₂ O (T)	Ta ₂ O ₅ (lb)
Indicated	70.0	1.01	53	0.64	709,100	9,948,600
Inferred	4.1	0.76	65	0.88	31,100	724,700
Total	74.1	1.00	54	0.65	740,200	10,673,300

Domain	Classification	Mt	Li ₂ O (%)	Ta ₂ O ₅ (ppm)	Fe ₂ O ₃ (%)	Li ₂ O (T)	Ta ₂ O ₅ (T)	Ta ₂ O ₅ (lb)	Category Contribution	MRE Contribution
Leia	Indicated	46.5	1.05	65	0.60	489,700	3,013	6,641,000	99%	63%
	Inferred	0.3	0.88	64	0.83	2,900	21	46,500	1%	
	Sub Total	46.8	1.05	65	0.60	492,600	3,034	6,687,500	100%	
Luke	Indicated	14.1	0.93	73	0.63	131,400	1,034	2,278,100	89%	22%
	Inferred	2.1	0.76	64	0.47	15,700	132	291,500	11%	
	Sub Total	16.2	0.91	72	0.61	147,100	1,166	2,569,600	100%	

For personal use only

OPEN PIT MINING

MINE DESIGN PARAMETERS

CUT OFF GRADE



- Open Pit – 0.30% Li₂O
- Underground – 0.70% Li₂O

GEOTECH

There are six main rock types defined from geotechnical logging – gabbro, basaltic andesite, dolerite dyke, pegmatite and granite are considered as ‘good rock’, meaning they are strong and competent. Weathered rock is limited in depth but is noted to be ‘poor rock’.

- Pit slope angle fresh rock – 47.0 degrees
- Pit slope angle oxide – 30.6 degrees
- Pit slope angle overall – 46.0 degrees

	Spodumene Ore				
Pit stage	Tonnes (Mt)	Li ₂ O (kt)	Li ₂ O Grade (%)	Ta ₂ O ₅ grade (ppm)	Fe ₂ O ₃ Grade (%)
1	2.6	25.1	0.96	78.8	1.55
2	10.7	102.9	0.96	69.3	1.08
3	8.5	85.3	1.01	55.5	1.13
4	15.0	153.0	1.02	58.4	0.92
Total	36.8	366	1.00	62.4	1.06

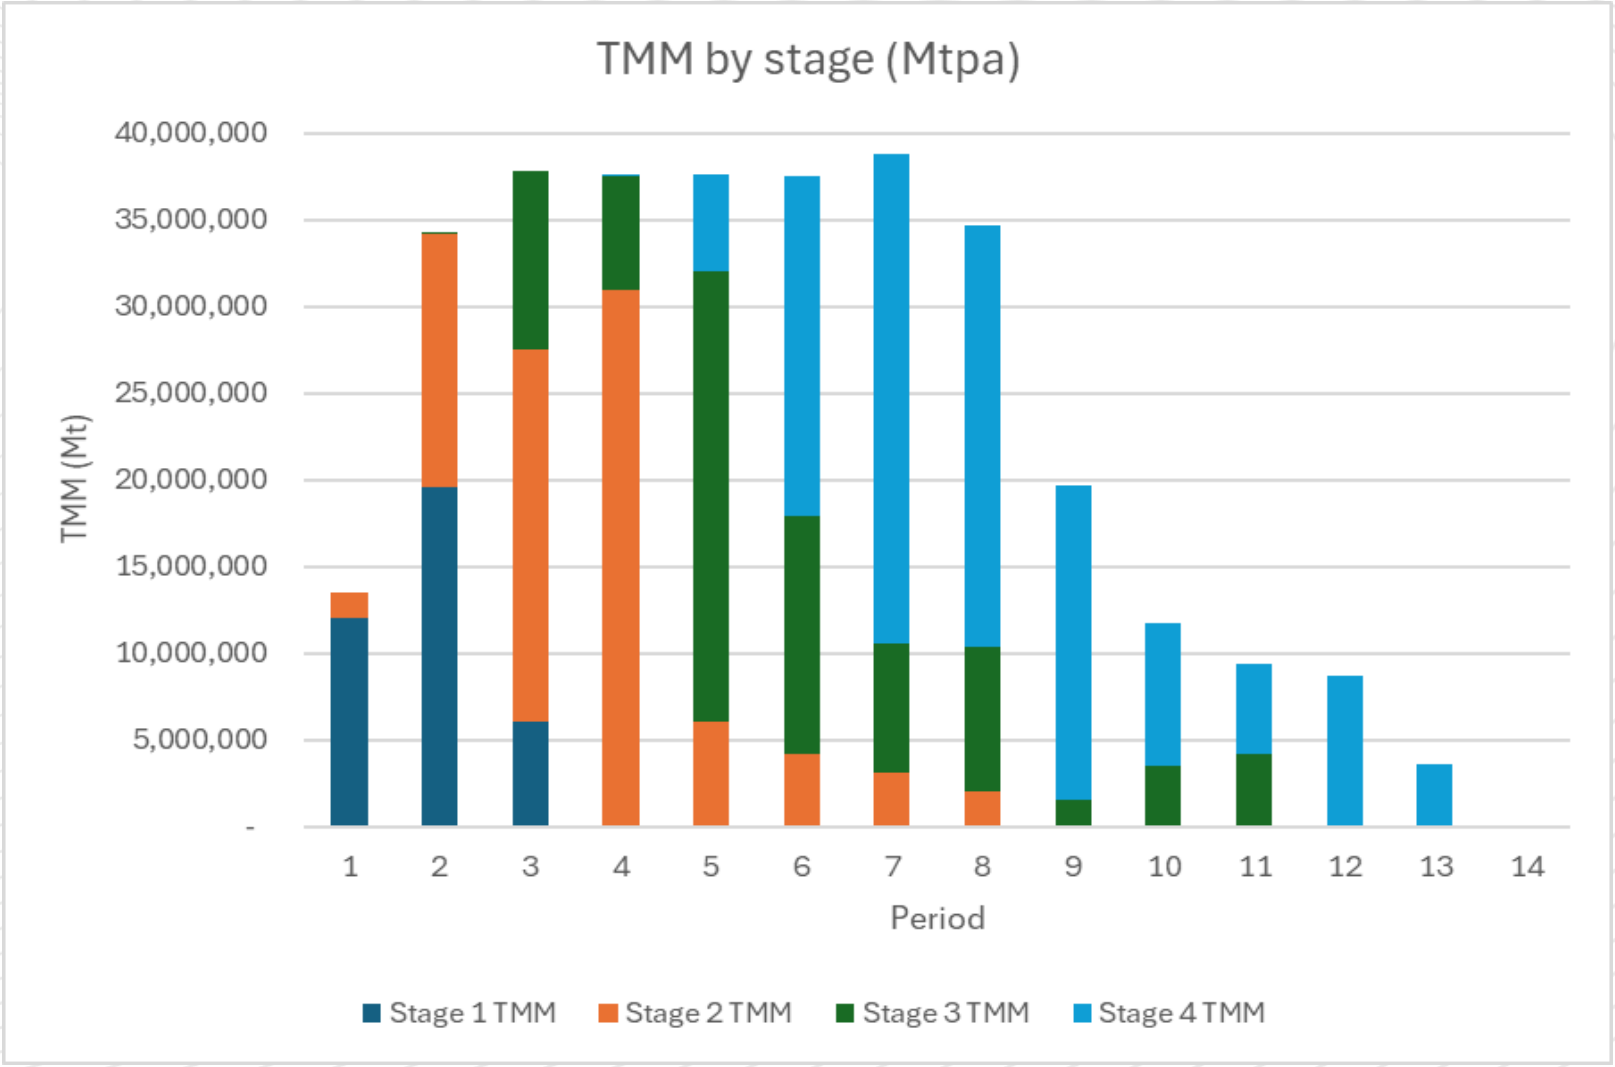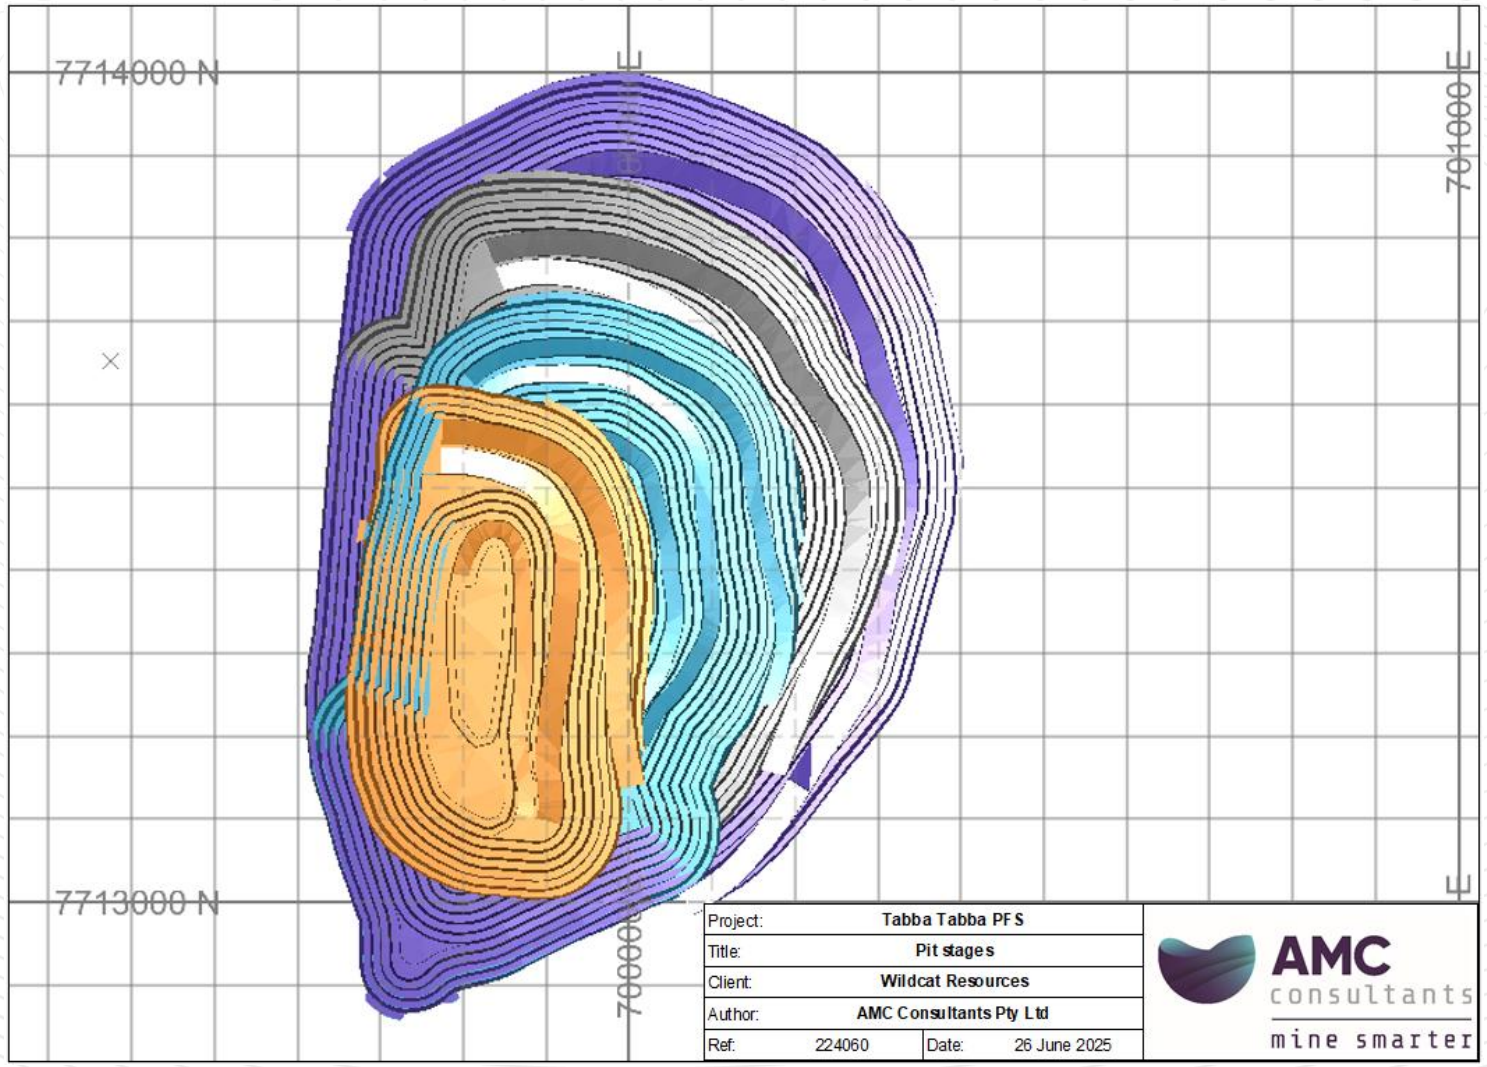

For personal use only

UNDERGROUND MINING

UNDERGROUND MINE DESIGN



- Cut off Grade – 0.70% Li₂O
- Underground design considers separate Upper and Lower zones at Leia, creating three semi-independent mining areas.

STOP OPTIMISATION

- Identified three mining areas for Luke (South, Central and North) and two for Upper Leia (Upper Leia A and Upper Leia B), creating six mining horizons with unique orientations.

PRODUCTION SCHEDULE

- Underground production schedule aims to balance primary infrastructure establishment against early production from Luke
- Targeting steady state production of approximately 1Mtpa

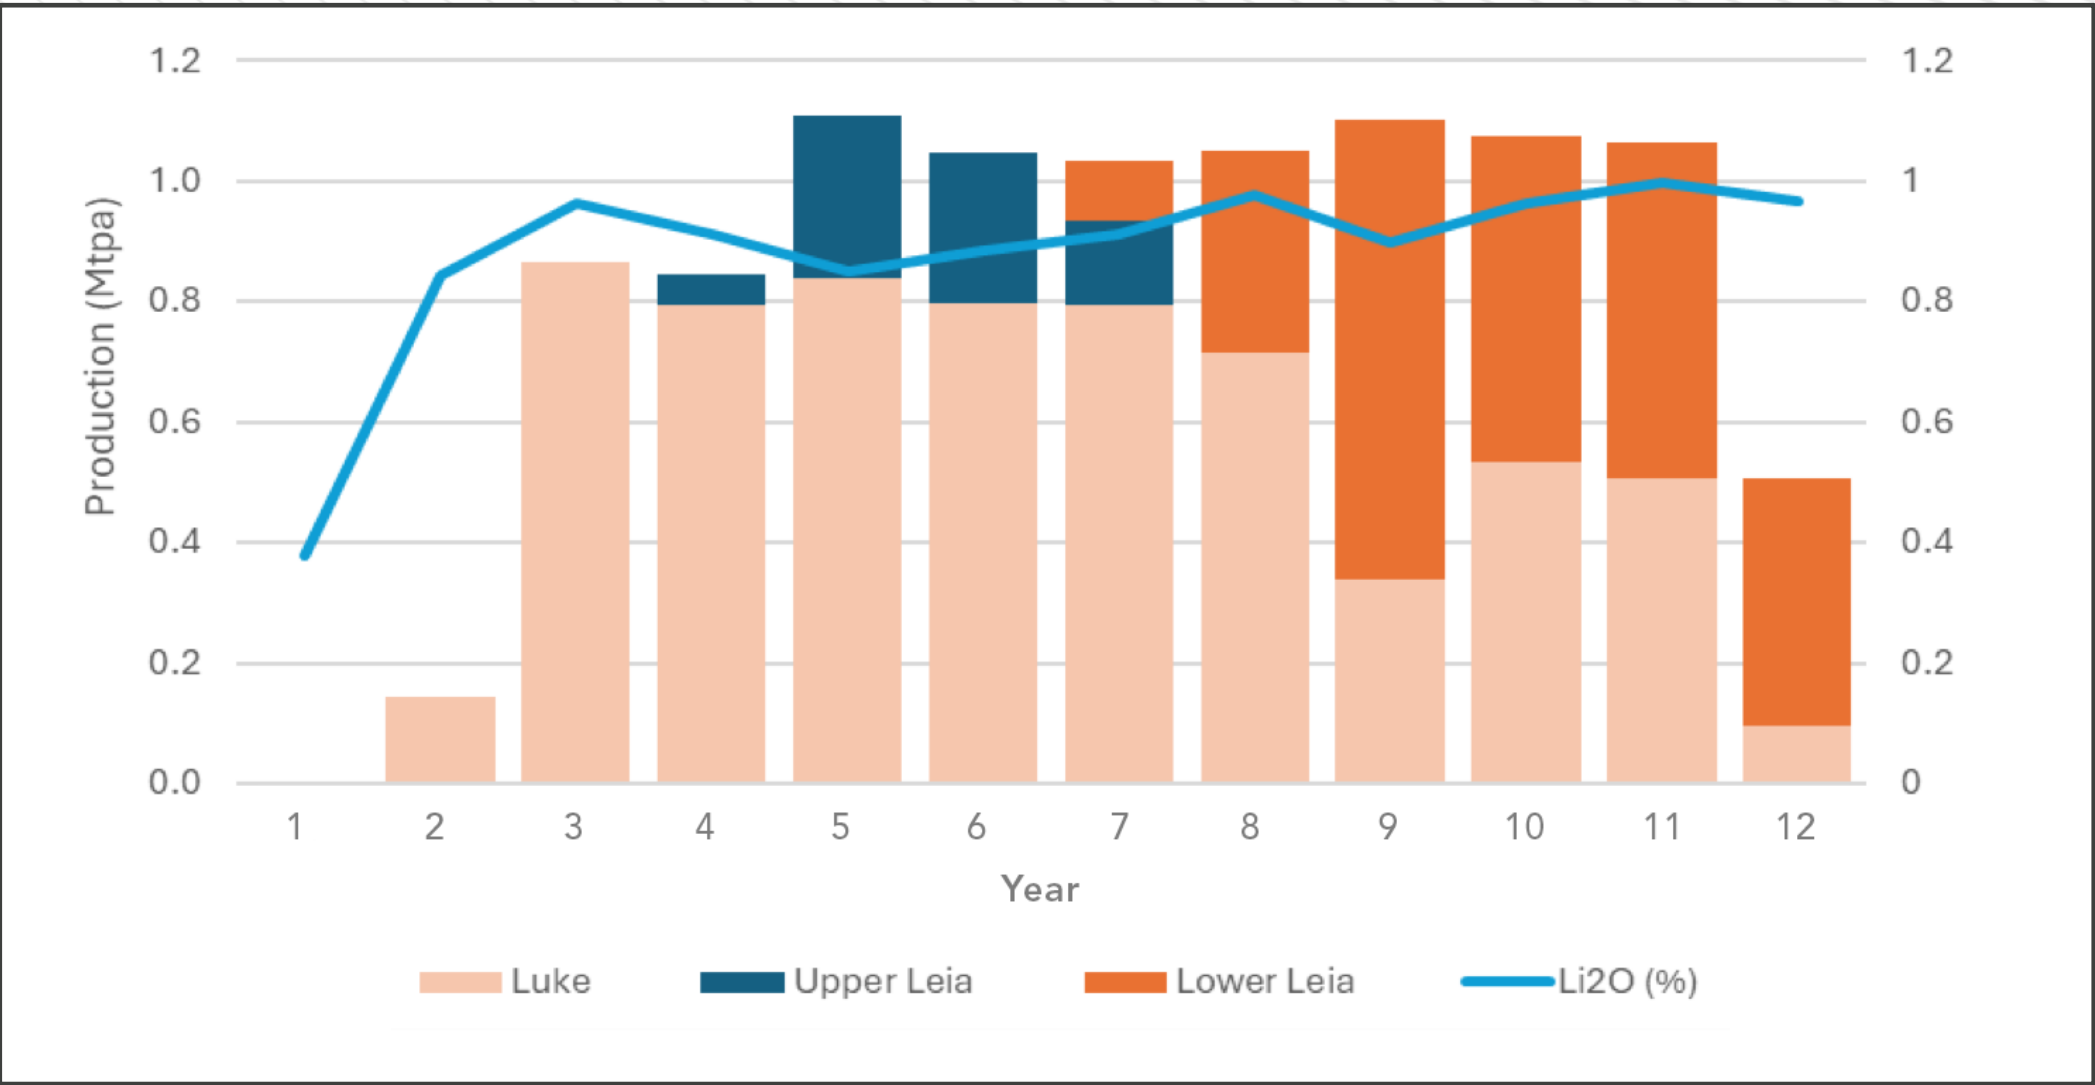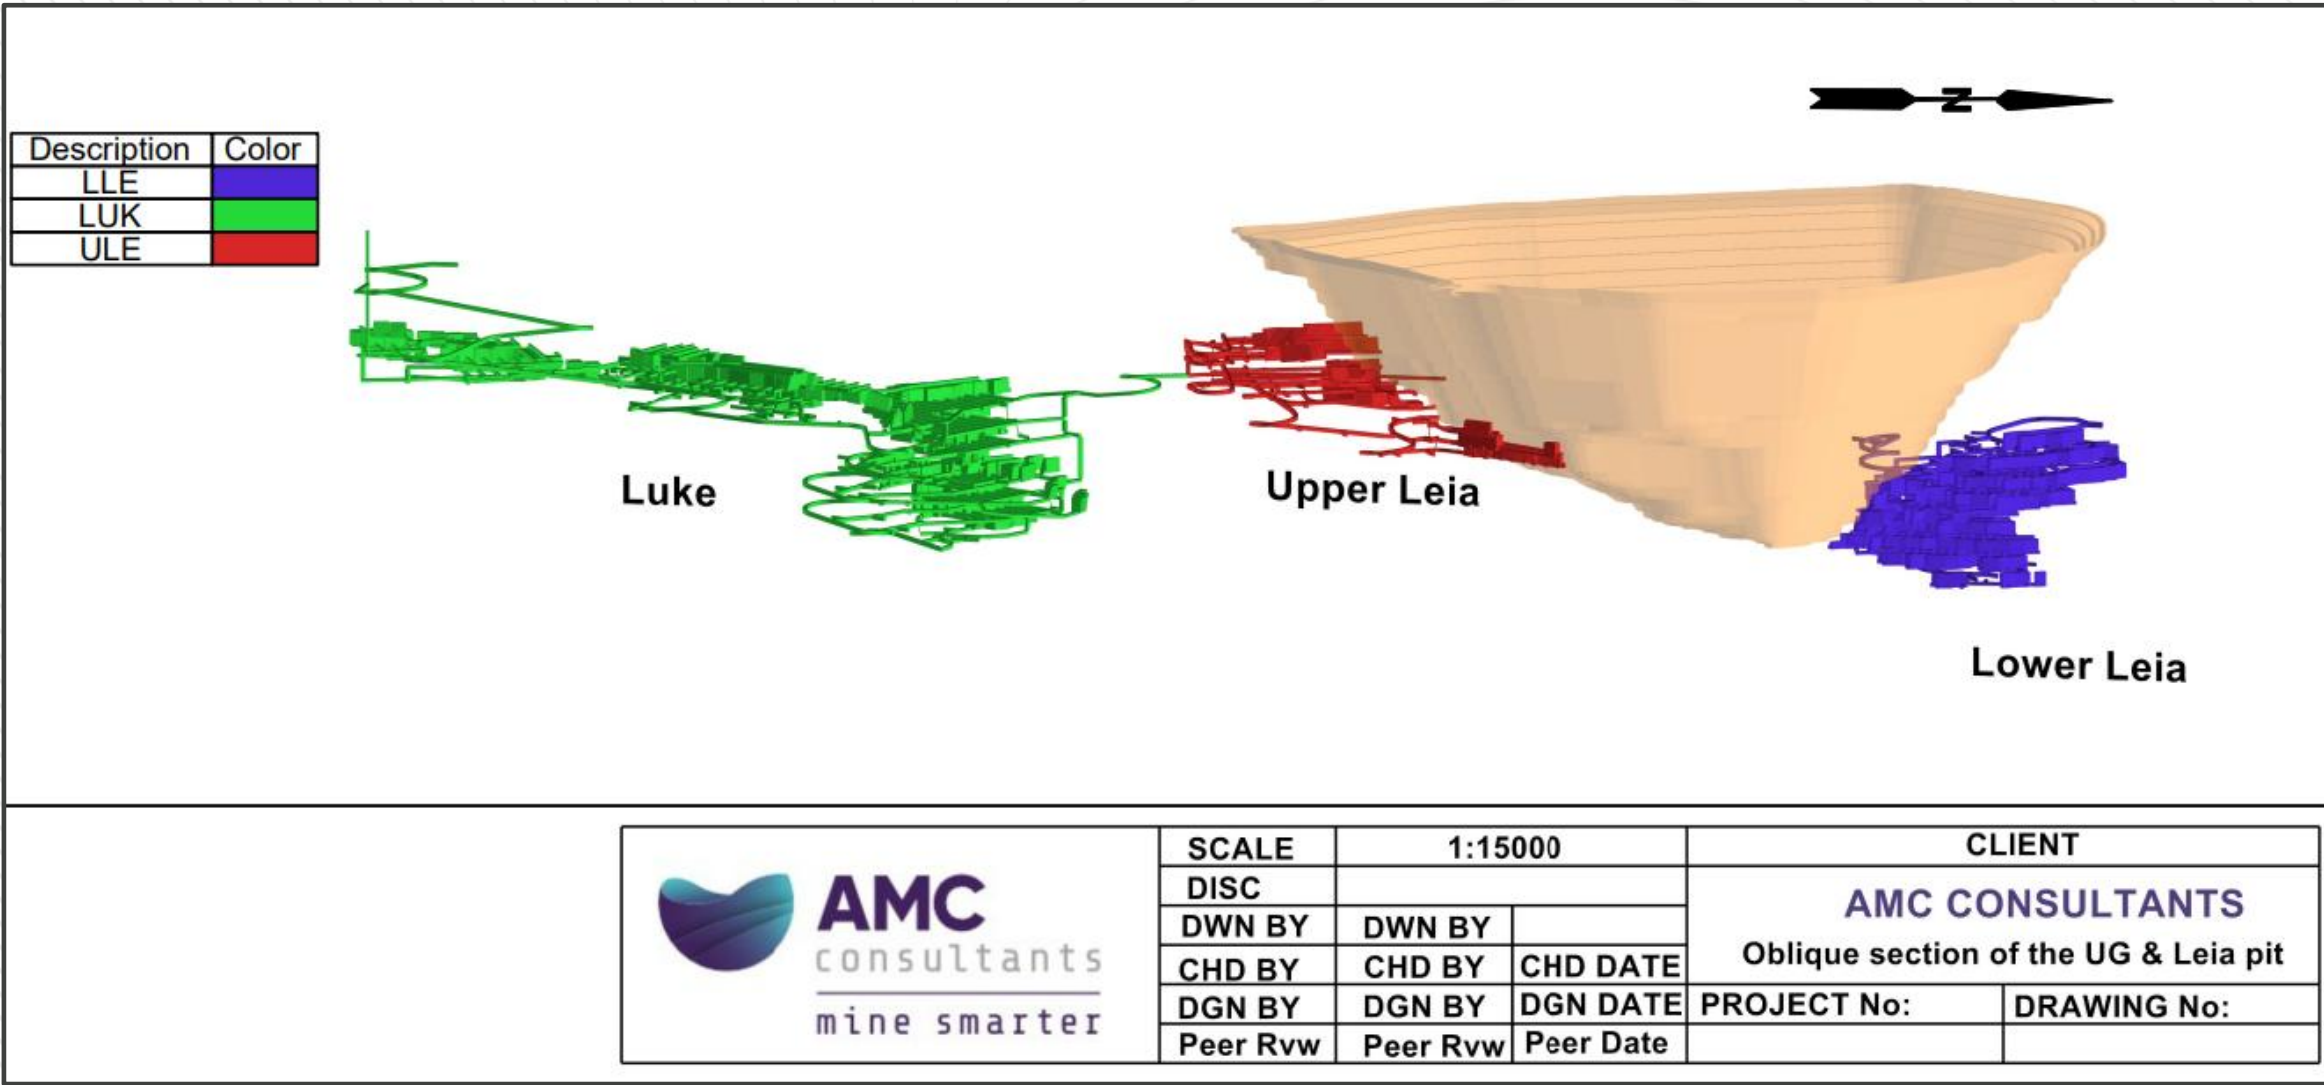

For personal use only

MINING – OPEN PIT AND UNDERGROUND COMBINED



Year	Unit	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	TOTAL
TMM Pit Stage 1	Mt	12.1	19.5	6.0	-	-	-	-	-	-	-	-	-	-	-	-	37.6
TMM Pit Stage 2	Mt	1.4	14.7	21.5	31.0	5.8	2.6	2.3	3.8	0.7	-	-	-	-	-	-	83.8
TMM Pit Stage 3	Mt	-	0.1	10.3	6.6	19.1	16.8	3.5	9.7	6.5	1.4	3.4	2.8	1.5	-	-	81.8
TMM Pit Stage 4	Mt	-	-	-	0.1	12.9	19.1	32.2	10.4	6.5	12.3	4.9	6.5	6.1	6.4	4.4	121.8
TMM all stages	Mt	13.5	34.3	37.8	37.7	37.8	38.5	38.1	23.9	13.7	13.7	8.2	9.3	7.6	6.4	4.4	324.9
Ore Pit Stage 1	Mt	0.1	0.6	1.9	-	-	-	-	-	-	-	-	-	-	-	-	2.6
Ore Pit Stage 2	Mt	-	0.4	0.4	2.2	2.1	1.3	1.3	2.6	0.6	-	-	-	-	-	-	10.7
Ore Pit Stage 3	Mt	-	-	-	-	-	0.0	0.0	0.8	2.2	0.9	2.4	1.7	0.5	-	-	8.5
Ore Pit Stage 4	Mt	-	-	-	-	-	0.0	0.0	0.2	0.6	2.6	1.0	1.8	2.9	3.4	2.5	15.0
Ore Underground	Mt	-	-	-	0.0	0.1	0.9	0.8	1.1	1.0	1.0	1.1	1.1	1.1	1.1	0.5	9.8
Total Ore Mined	Mt	0.1	1.0	2.2	2.2	2.3	2.2	2.2	4.6	4.5	4.4	4.5	4.6	4.5	4.4	3.0	46.6
Ore Grade Mined	Li ₂ O %	0.61	0.90	0.99	0.92	1.01	1.03	0.93	0.88	0.92	1.00	1.04	1.02	1.07	1.05	0.87	1.0
Feed Tonnes	Mt	-	1.1	2.2	2.2	2.2	2.2	2.2	4.5	4.5	4.5	4.5	4.5	4.5	4.5	3.0	46.6
Feed Li Grade	Li ₂ O %	-	0.9	1.0	0.9	1.0	1.0	0.9	0.9	0.9	1.0	1.0	1.0	1.1	1.0	0.9	1.0
Feed Fe Grade	Fe ₂ O ₃ %	-	1.7	1.4	1.3	1.3	1.3	1.1	1.2	1.1	1.0	1.0	1.0	1.0	0.9	0.7	1.1
Li Concentrate	kt	-	128	300	276	307	309	276	549	562	612	637	632	652	640	360	6,241

For personal use only



MINING – OPEN PIT AND UNDERGROUND COMBINED CONTINUED

For personal use only

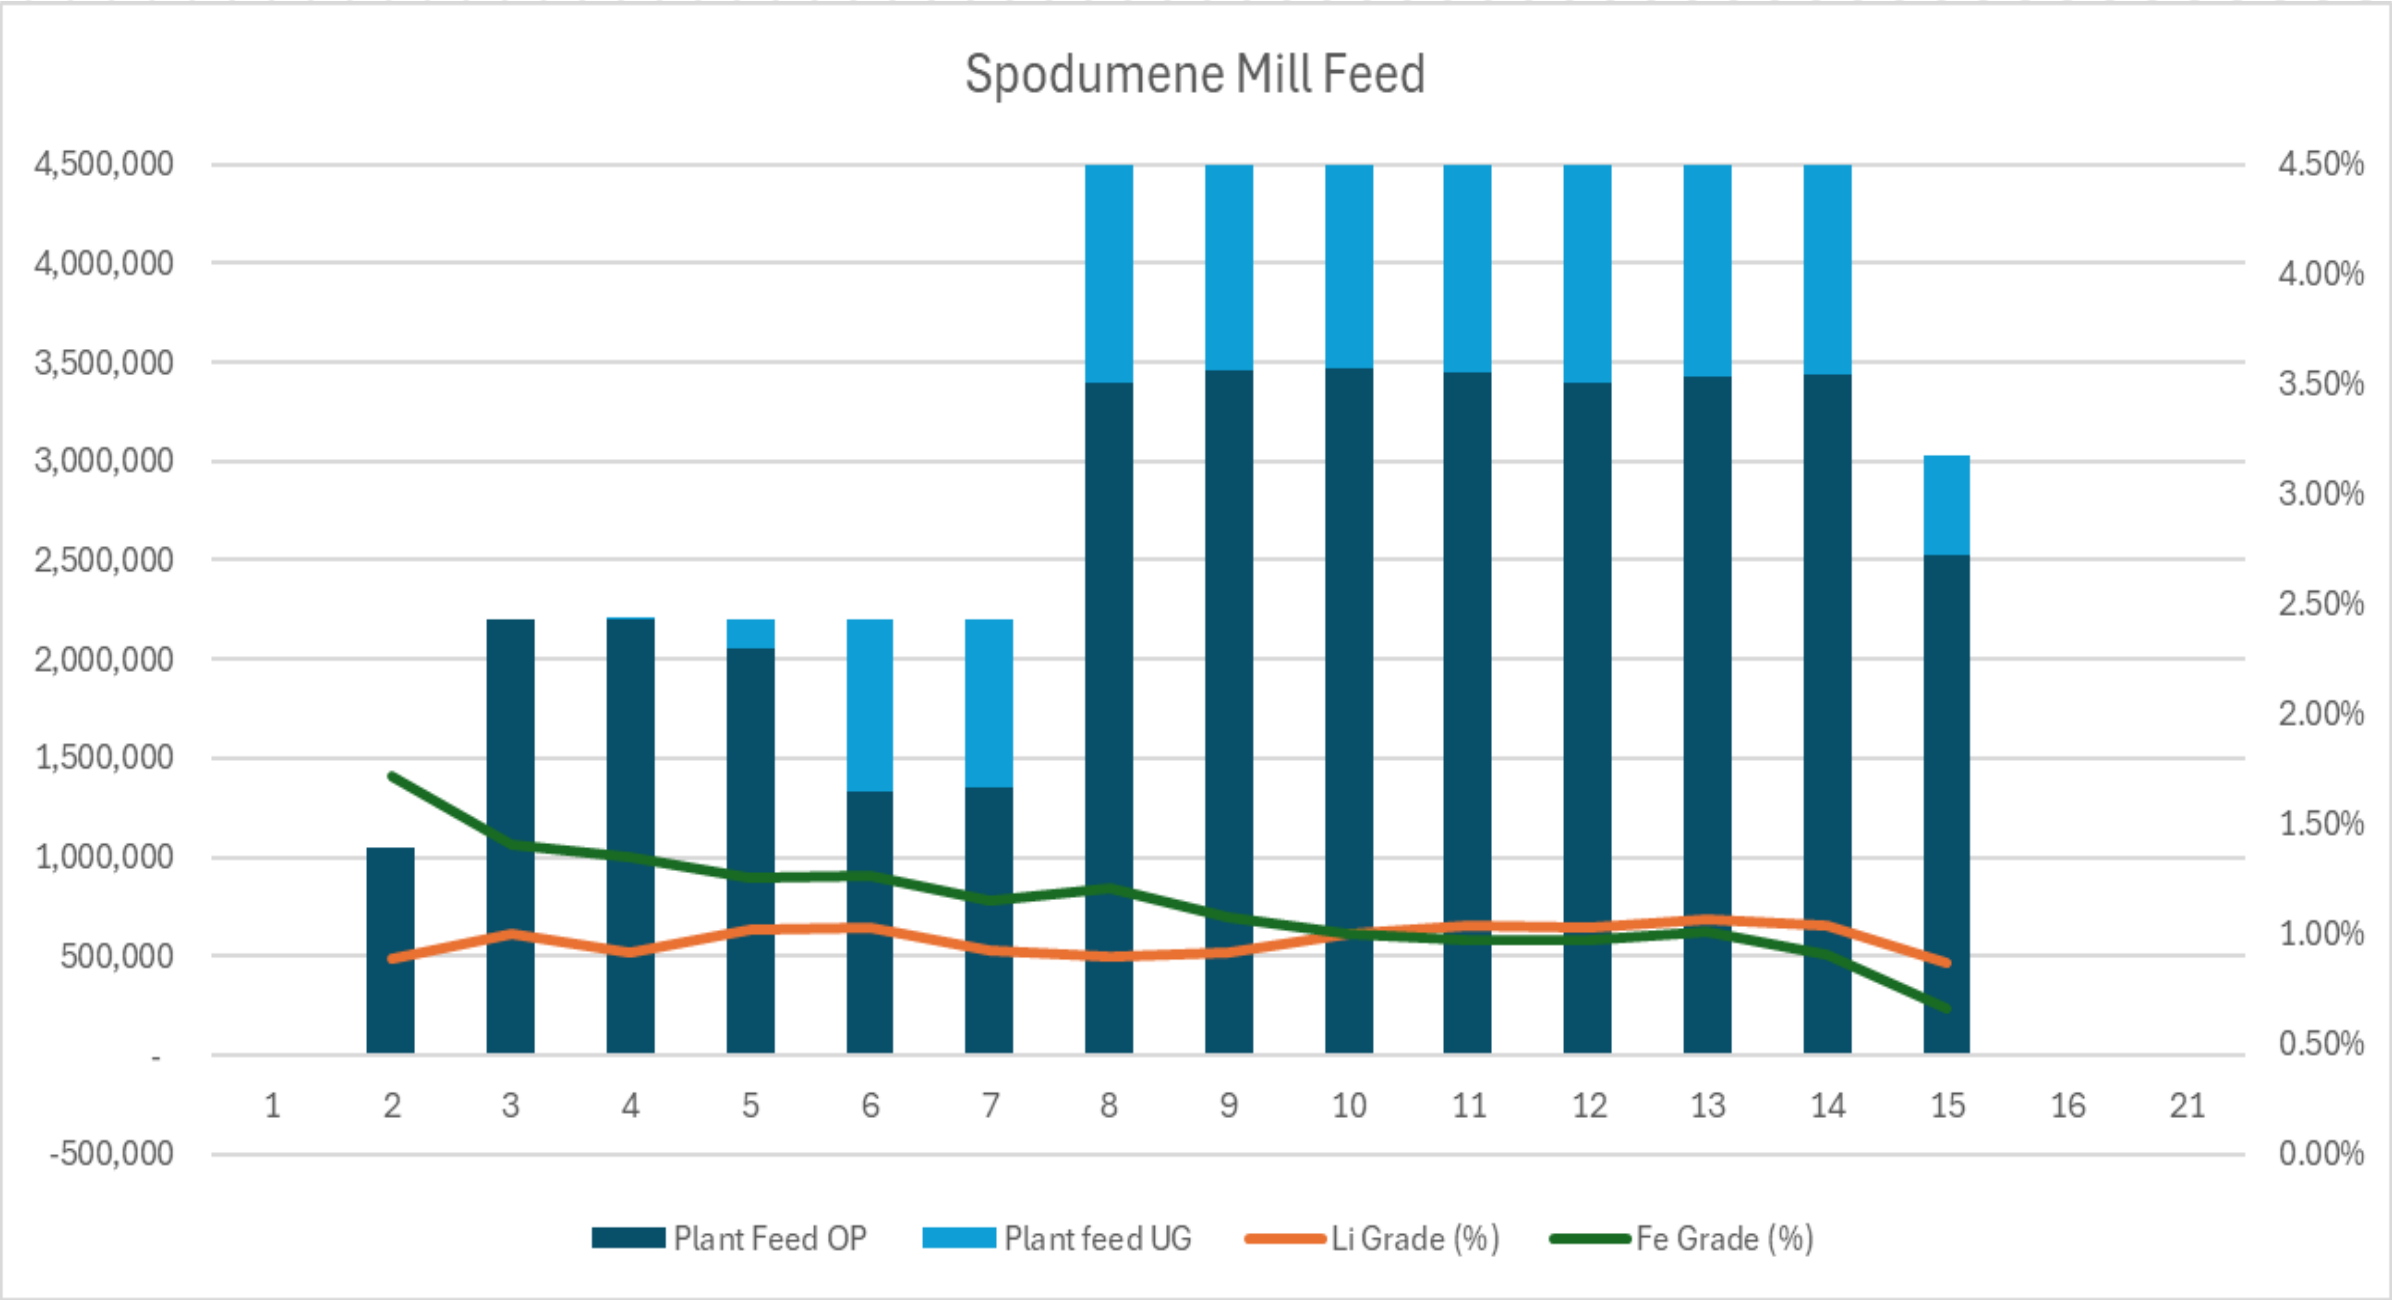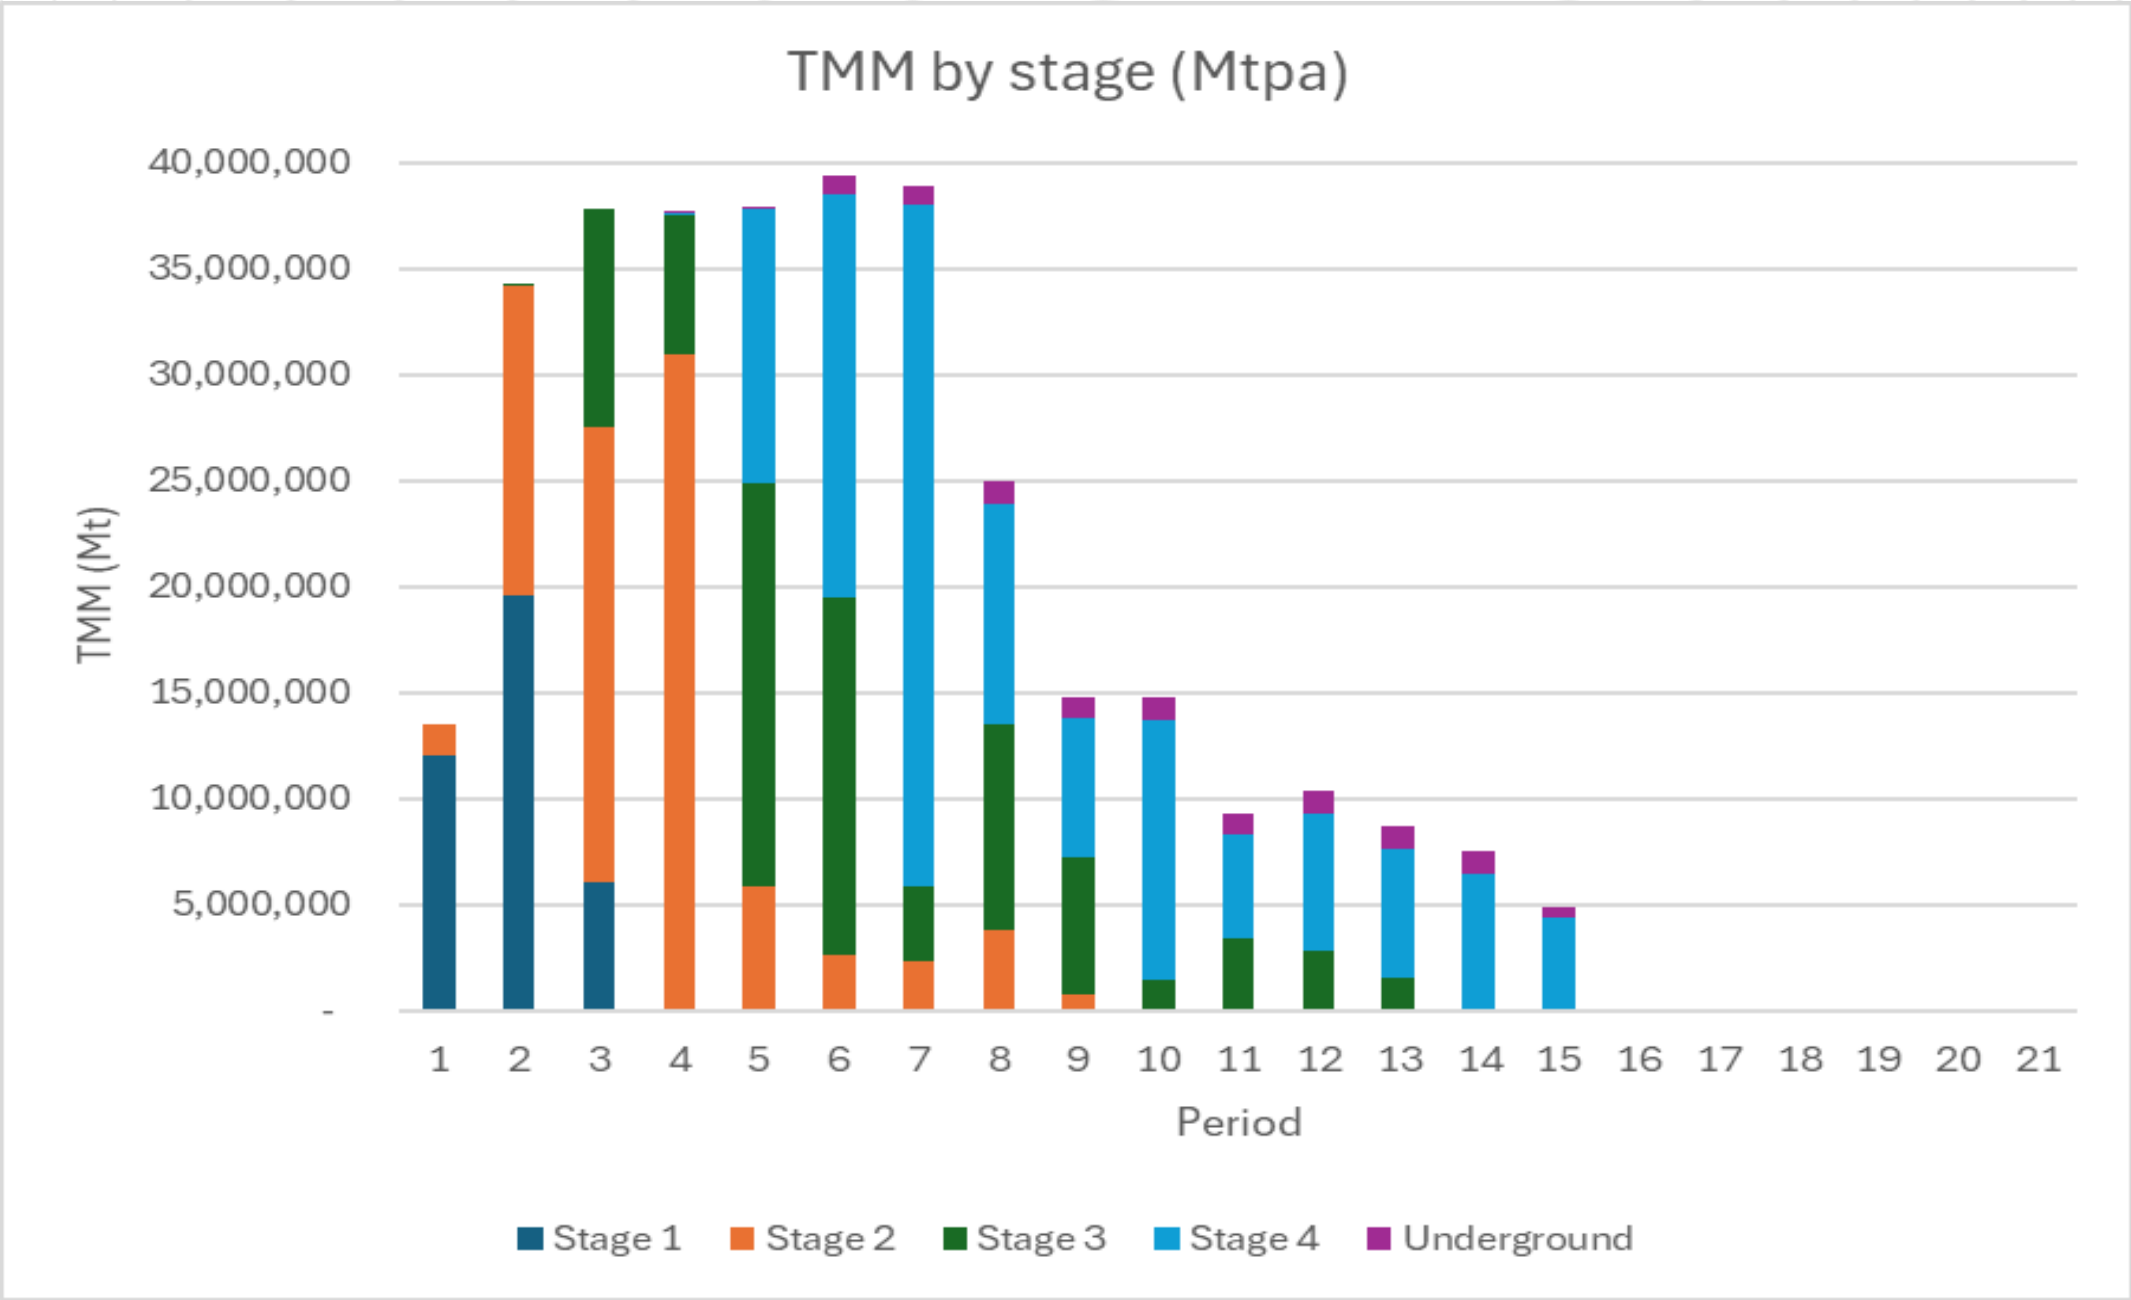

ORE RESERVE



- The JORC Code (2012) Tabbata Tabbata Probable Ore Reserve is 46.3Mt at 1.0% Li₂O.
- In addition to the open pit Ore Reserve the pits contain a small volume of inferred mineralisation that does not report to the ORE. The inferred material consists of 35kt with a grade of 0.63% Li₂O. This is equivalent to 0.1% of the total in pit inventory.

Source	Classification	Material Type	Tonnes (Mt)	Li ₂ O grade (%)	Ta ₂ O ₅ (ppm)	Fe ₂ O ₃ (%)	Li ₂ O (kt)
Open pit	Proved	Spodumene	-	-	-	-	-
	Probable	Spodumene	36.8	1.00	62.4	1.06	366
Underground	Proved	Spodumene	-	-	-	-	-
	Probable	Spodumene	9.5	0.94	51.9	0.86	90
Total	Probable	Spodumene	46.3	0.99	60.2	1.02	456

For personal use only

PROCESS PLANT – CRUSHING AND MILLING

CRUSHING

Three-stage crushing:

- Primary crusher – Jaw
- Secondary crusher – Cone
- Tertiary crusher – Cone


Crushing circuit designed for a 4.5 Mtpa instantaneous throughput rate of 694 tph

Increased capacity in Phase 1 (2.2 Mtpa) allows for:

- Potential day shift-only operation of the crushing circuit
- Back-shift crushing of waste material/s
- Incorporation of ore sorting technology into the as designed crushing system

GRINDING

- Single Stage Ball Mill
- Grind size of P80 180µm being targeted
- Grinding Circuit capable of P80 150µm
- Mirrored circuits of 2.2Mtpa (Stage 1 and Stage 2)

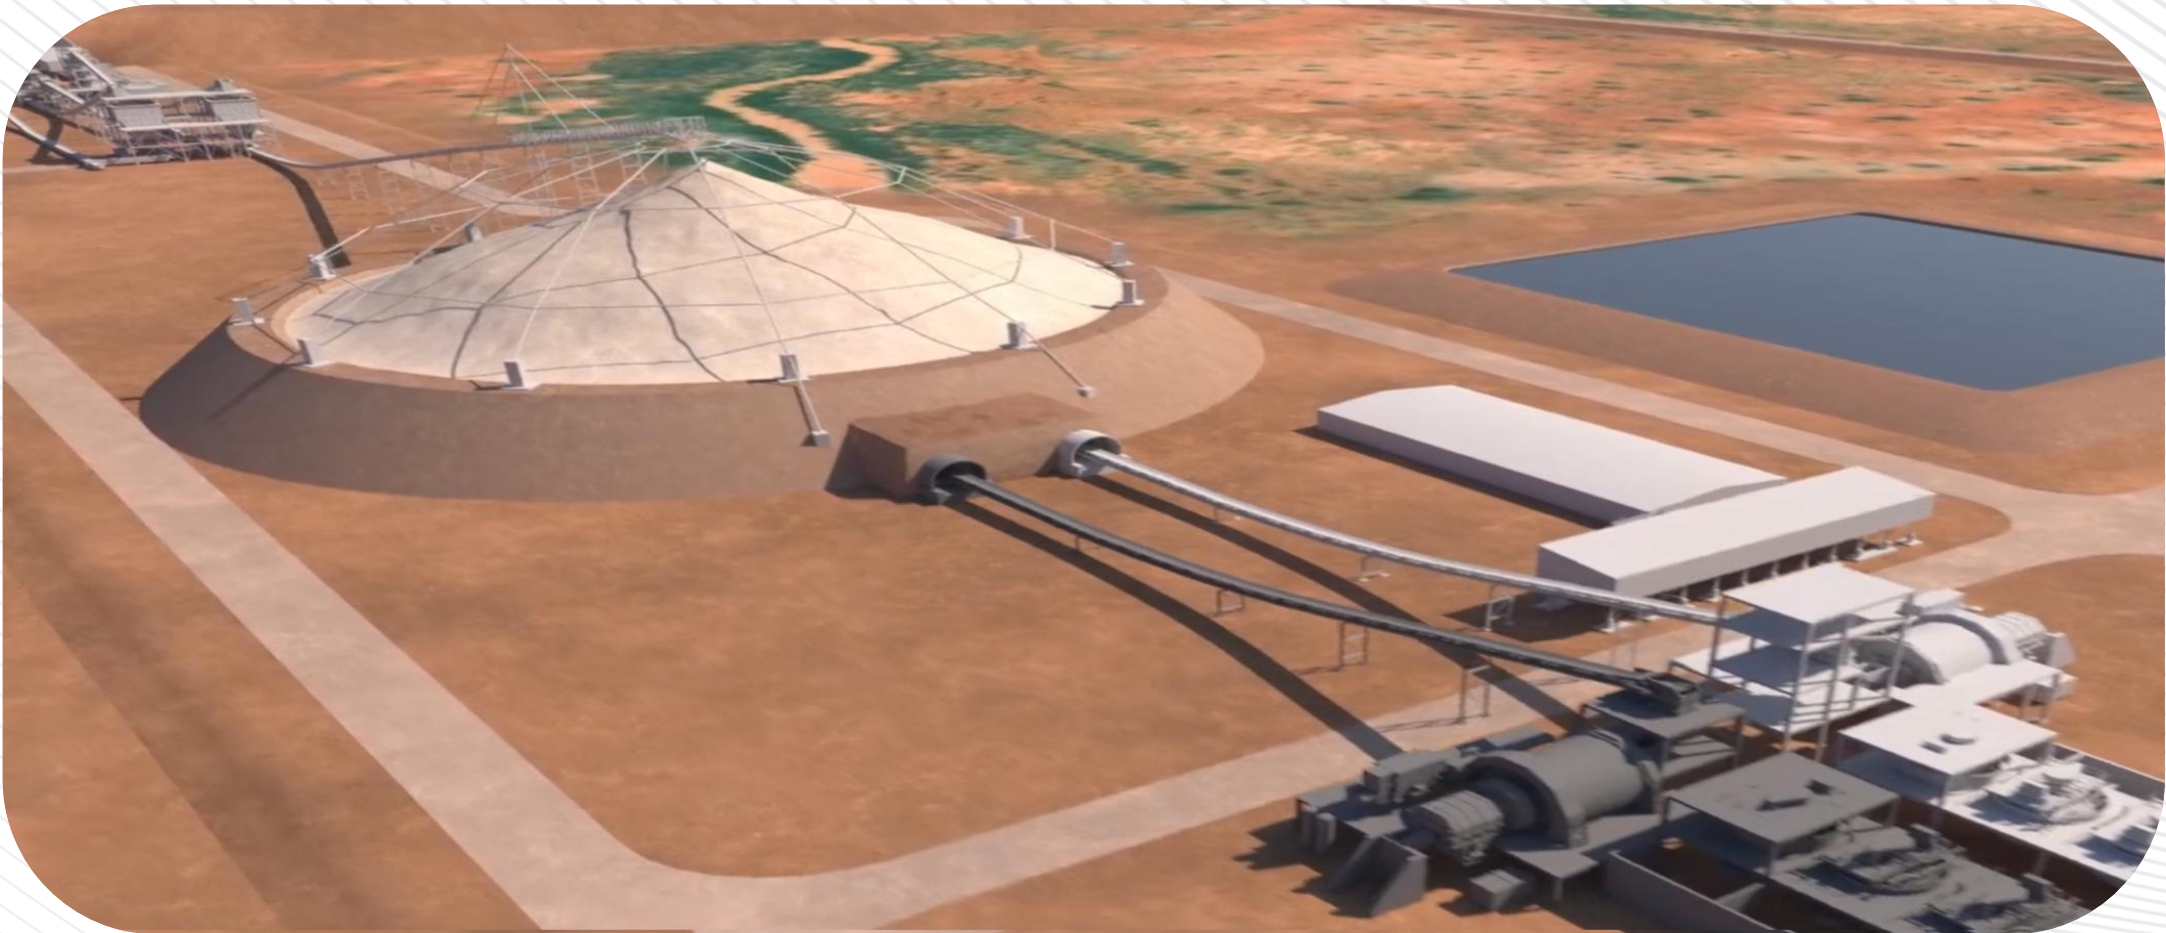

Description	Units	Data
Comminution Circuit Arrangement	Type	3CB
ROM Feed Size Maximum (F ₁₀₀)	mm	800
ROM Feed Size Average (F ₈₀)	mm	535
Crushed Product Size Average (P ₁₀₀)	mm	16.0
Crushed Product Size Average (P ₈₀)	mm	9.8
Milled Product Size P ₈₀	µm	150

For personal use only


PROCESS PLANT – FLOTATION AND THICKENING

FLOTATION

- Two trains at 2.2Mtpa for 4.5Mpta (Stage 1 and 2)
- Three stages of flotation:
- Rougher;
 - Cleaner; and
 - Recleaner
- Scavenger Circuit:
- Installed in Stage 1 and capable of supporting both Stage 1 and Stage 2
 - Utilised as needed

THICKENING

- Thickening capable of supporting both stage 1 and stage 2 from commencement
- Separate thickening of the Slimes and Flotation tails has been provisioned for given the significant difference in the settling properties of the two tailings material types.
- Concentrate thickener sized for stage 2

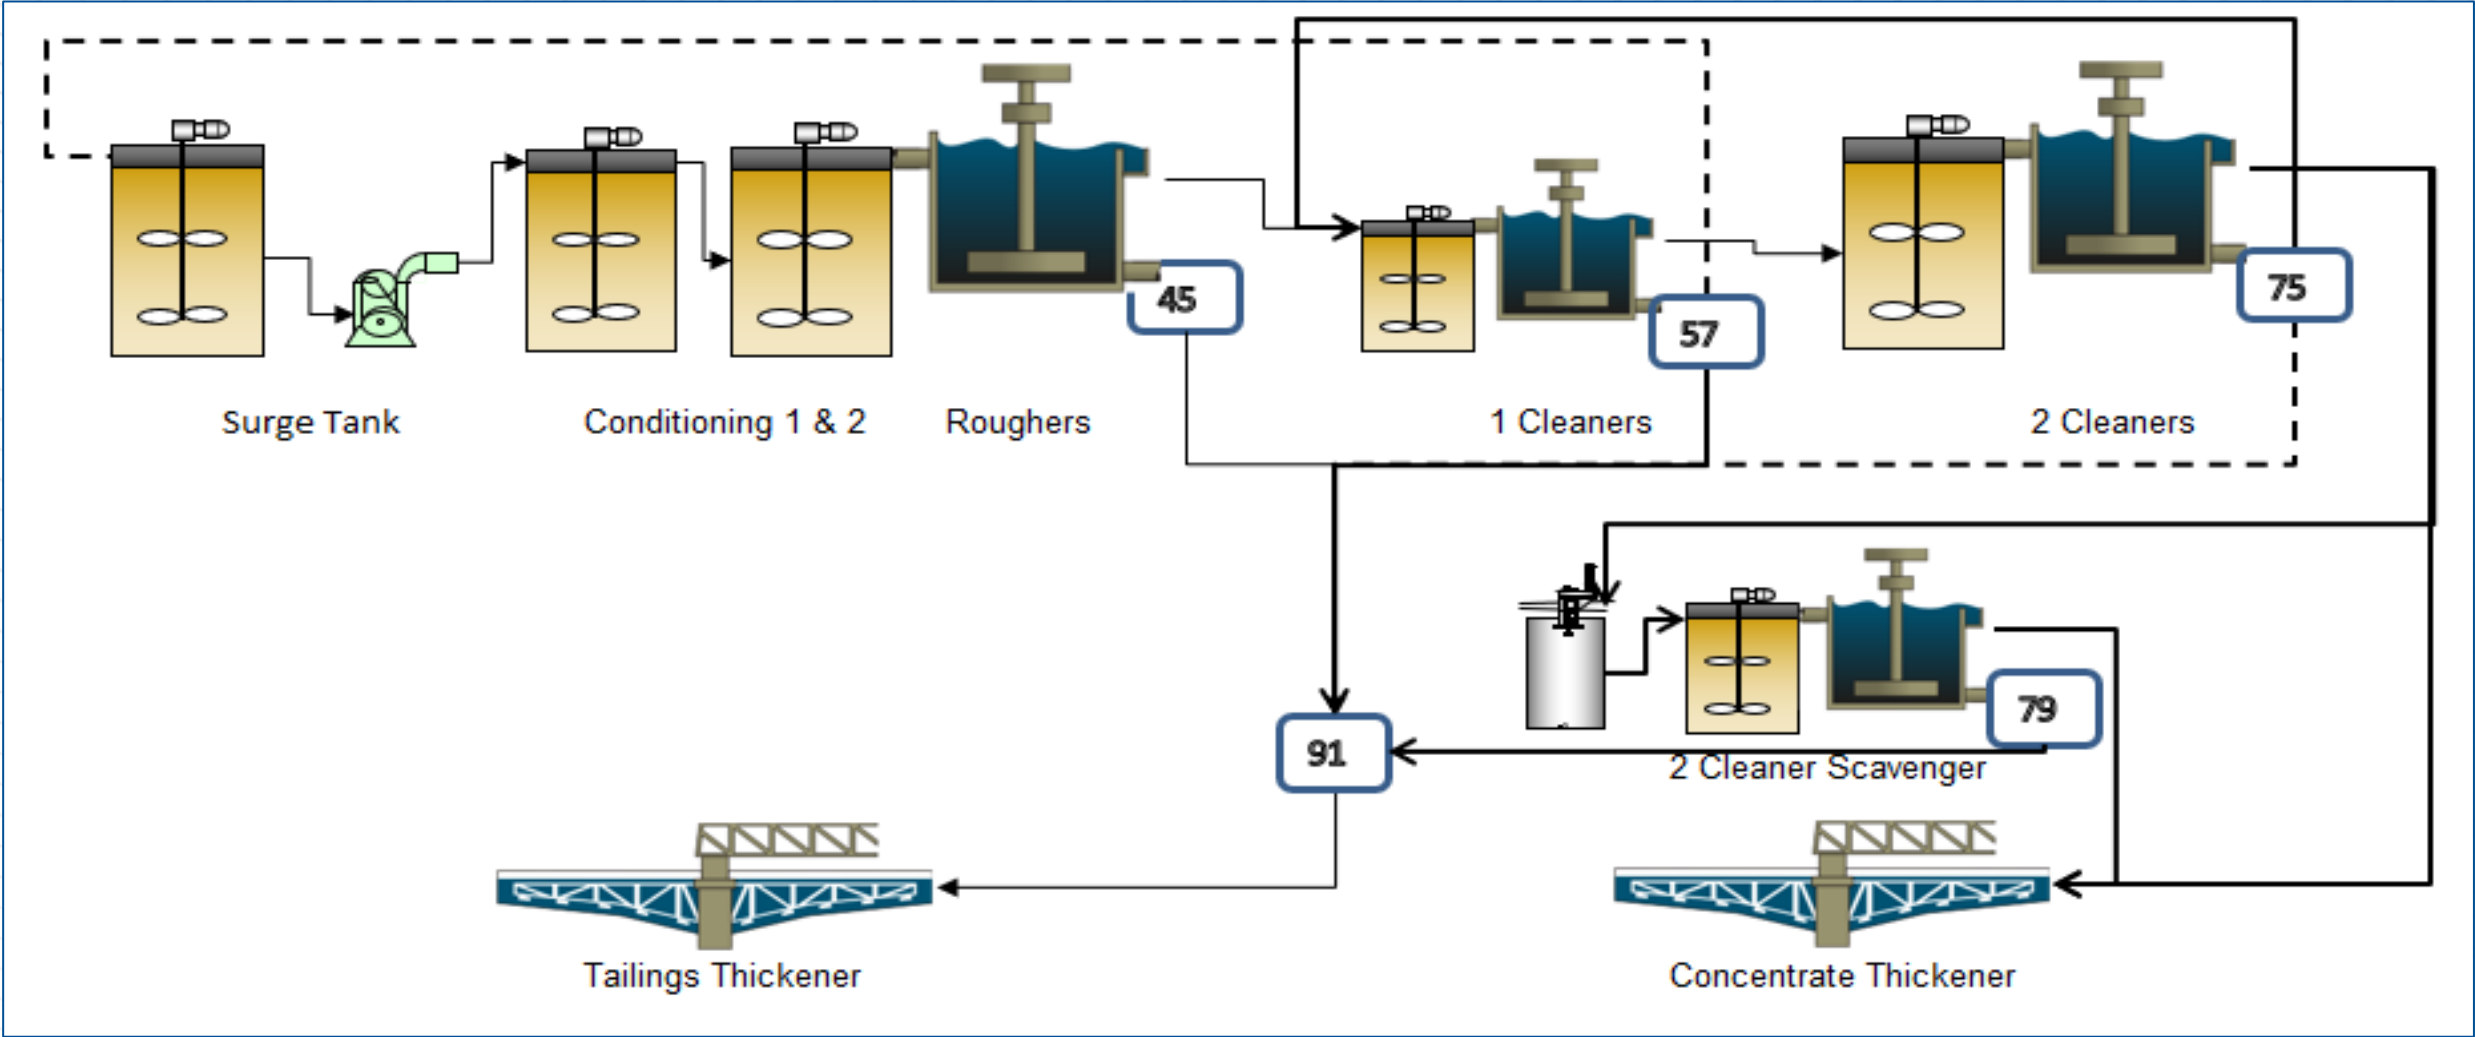

Description	Rougher Feed	Rougher Concentrate	1 st Cleaner Concentrate	2 nd Cleaner Concentrate	Concentrate Thickener Feed
Mass % of Unit Feed	100	24.96	21.21	17.88	17.88
Li ₂ O%	1.10	4.15	4.82	5.5	5.5
Fe ₂ O ₃ %	0.19	0.48	0.48	0.47	0.47
K ₂ O%	2.88	1.84	1.46	1.10	1.10
SiO ₂ %	74.23	65.66	64.48	63.35	63.35
Al ₂ O ₃ %	15.63	22.82	23.82	25.15	25.15

For personal use only

METALLURGY



PROCESSING METHODOLOGIES TESTED

- DMS / HLS
- DMS / HLS and flotation
- Flotation

PROCESSING METHODOLOGY

- Crush / grind
- Magnetic separation – iron removal
- De-slime
- Whole of ore flotation
- Spodumene concentrate dewatering

PROCESSING METHODOLOGY

Financial model based on high, medium and low-grade recoveries

Losses:

- Slimes
- Magnetic
- Tailings

Parameter	Scoping Master Composite	PFS Master Composite
Head Grade (Li ₂ O)	1.42	1.01
Grind Size (µm)	150	180
Deslime Loss (%)	10.2	7.2
Magnetic Rejects (%)	N/A	0.55
Rougher Flotation Loss (%)	4.60	5.20
Other Flotation Losses (%)	0.55	2.50
Product Grade (Li ₂ O %)	5.54	5.60
Overall Li ₂ O Recovery (%)	84.65	84.55
Process Design Parameters	Figure	Unit
Primary Grind	180	µm
Deslime Cut Point	20	µm
Magnetic Removal Strength	3000	guass
Rougher Reagent Addition	880	g/t
ReCleaner Scav Grind Size	90	µm
Scavenger Collector Dosage	300	g/t
Feed Grade Li ₂ O %	Expected Recovery	
0.5 – 0.7	68-72	
0.7 0 1.0	76-81	
+ 1.0	79-85	

TAILINGS STORAGE FACILITY (TSF)

TSF PARAMETERS

- Total tailings production: 74.1 Mt;
- Life of Mine (LoM): 18 years;
- Annual tailings production: ~3.85 Mtpa (dry tonnes);
- Tailings deposited at 55% solids;
- Tailings design density of 1.4 t/m³ (dry)*;
- Tailings beach slope of 1.0%;

TAILINGS GEOCHEMISTRY

- Minimum total freeboard of 0.5 m.
- The tailings solids sample was classified as Non-Acid Forming (NAF), with very low total sulphur (<0.01 wt%) and sulphide sulphur (<0.009 wt%). The Net Acid Producing Potential (NAPP) was measured at -2.4 kg H₂SO₄/t, indicating a low acid generation risk.
- Paste pH and NAG pH results confirmed circum-neutral to mildly alkaline characteristics, with a pH of 8.8 and NAG pH of 6.2.
- Leachate testing indicated the tailings water is fresh to marginally brackish, with low concentrations of anions and cations. Trace metal levels were within acceptable environmental limits, with no significant metal leaching potential observed under oxidised conditions.
- The sample was free of asbestos and fibrous minerals, based on XRD screening.
- The total uranium and thorium concentrations yielded a combined radioactivity of 0.04 Bq/g, confirming that the material does not present a NORM hazard.
- The elemental composition showed no notable enrichment, with all analytes well below thresholds of environmental concern. Slight elevations in barium and manganese were observed but remain within typical crustal abundance ranges.

TAILINGS STORAGE FACILITY (TSF) CONTINUED

TSF PARAMETERS


The tailings are classified as non-plastic silty silt/clay, with a particle density of 2.6 t/m^3 .

Particle Size Distribution:

- 44% passing $75 \mu\text{m}$
- Approximately 8% passing 0.005 mm
- Approximately 2% estimated passing 0.001 mm

Consolidation and Settlement Behaviour:

- Undrained oedometer testing produced a settled dry density of 1.32 t/m^3 , with a final void ratio of 0.739 at 1600 kPa.
- Drained settlement testing resulted in final dry densities around 1.30 to 1.35 t/m^3 , reflecting drying trends consistent with similar lithium operations.

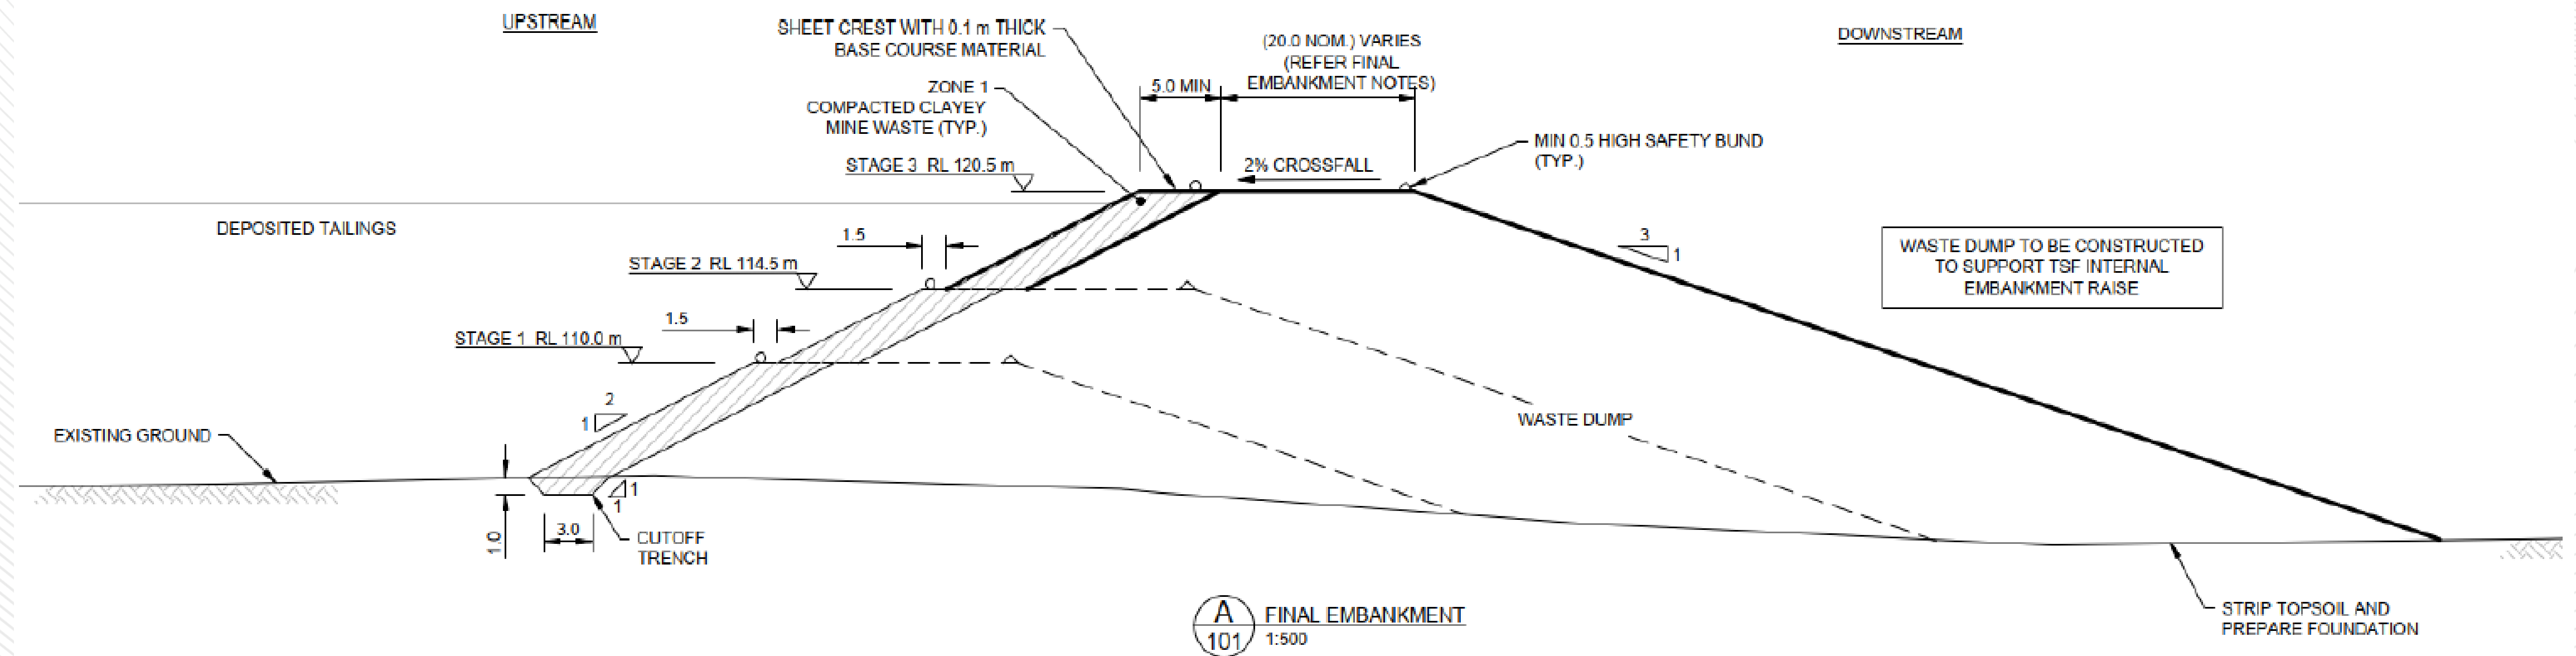

ROADS

SITE ACCESS ROAD

New site access road to be established between Marble Bar Road and the Mine

- Located on high ground to provide all weather access
- Designed for quad road trains / super triples

Marble Bar and Site Access Road Intersection:

- Main Roads approval required

HAUL ROAD

- 37m wide
- Dual lane, allowing for 789 haul trucks
- Haul distance approximately 4 – 5km

VEHICLE USE

- Mining heavy vehicle fleet separate from all other vehicles
- Mining, processing, and open pit and underground mining vehicles separated



MINE SERVICES AREAS

OPEN PIT & UNDERGROUND

Area to support mining operation

Key infrastructure:

- Fuel bay (light and heavy vehicles)
- Workshops
- Offices and ablutions
- Washdown bay



UTILITIES



POWER

- Build Own Operate (BOO) power plant planned
- Combination of battery, solar and gas turbine
- Wind turbines considered but not included due to cost and site requirements

WATER

Groundwater:

- Sourced from the open pit and underground
- Three bore fields planned within 10km of the mine

Surface water:

- Runoff from operational areas of the mine
- Open pit capture
- TSF Decant Return

Water Treatment Plant:

- Testwork underway for potable water and raw water treatment



CAMP



EARLY WORKS CAMP

The existing 80-person camp will support the early works program including:


- Bulk earthworks
- Establishment of the permanent 600-person camp
- Once the permanent camp is established, the existing camp will be surplus

PERMANENT CAMP

Would be established along the new site access road.

Camp size:

- 500 rooms required during construction
- 600 rooms required for steady state operations at 4.5Mtpa, with open pit and underground mining
- Facilities designed for 750 people
- Includes all features required of a modern camp, including:
- Ensuite rooms
- Recreation facilities
- Wet and dry mess
- Small shop

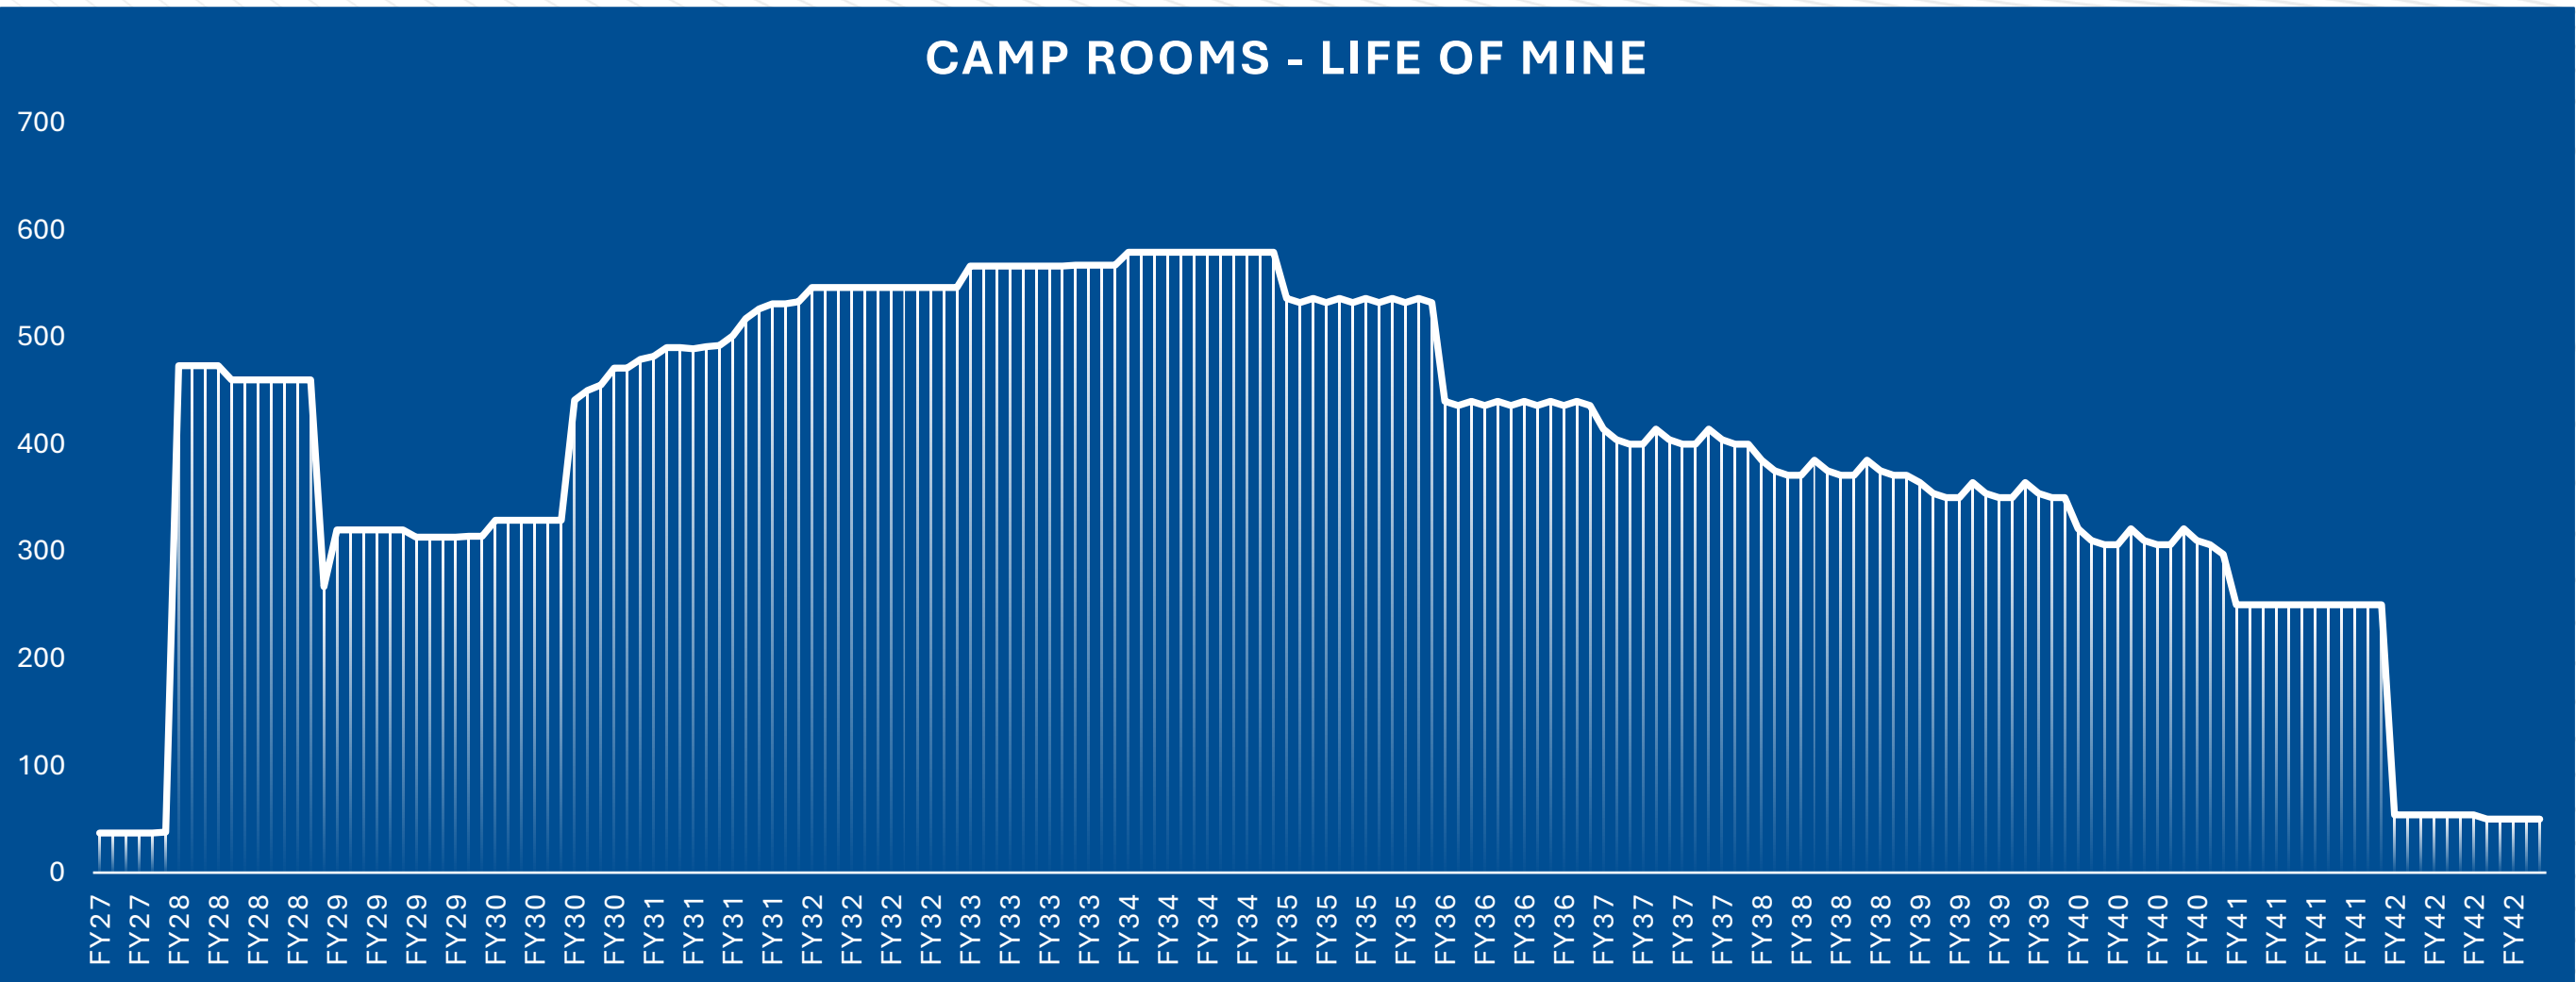

For personal use only



For personal use only

This presentation has been prepared by Wildcat Resources Ltd (WC8 or the Company). It contains general information about the Company’s activities current as at the date of the presentation. The information is provided in summary form and does not purport to be complete. This presentation is not to be distributed (nor taken to have been distributed) to any persons in any jurisdictions to whom an offer or solicitation to buy shares in the Company would be unlawful. Any recipient of the presentation warrants to the Company that the receipt of the presentation is not unlawful. It should not be considered as an offer or invitation to subscribe for or purchase any securities in the Company or as an inducement to make an offer or invitation with respect to those securities. No agreement to subscribe for securities in the Company will be entered into on the basis of this presentation or any information, opinions or conclusions expressed in the course of this presentation.

This presentation is not a prospectus, product disclosure document or other offering document under Australian law or under any other law. It has been prepared for information purposes only. This presentation contains general summary information and does not take into account the investment objectives, financial situation and particular needs of any individual investor. It is not financial product advice and investors should undertake their own due diligence and obtain their own independent advice from qualified professional advisors having regard to their objectives, financial situation and needs. Neither WC8 nor any of its related bodies corporate is licensed to provide financial product advice.

This presentation and information, opinions or conclusions expressed in the course of this presentation contains forecasts, projections and opinions which constitute forward looking statements. Forward looking statements include, but are not limited to, statements concerning the Company’s exploration and development programs, outlook and target sizes, production targets, financial forecast information, mineral resources and ore reserve estimates. They include statements qualified by words such as “potential”, “target”, “scheduled”, “planned”, “estimate”, “possible”, “future”, “prospective” and similar expressions. Such forward looking statements are not a guarantee of future performance, and are subject to numerous risks, uncertainties and other factors, including unknown ones, and subject to change without notice. Actual results and developments will almost certainly differ materially from those expressed or implied. There are a number of risks, both specific to WC8 and of a general nature which may affect the future operating and financial performance of WC8 and the value of an investment in WC8 including but not limited to title risk, renewal risk, economic and general market conditions, stock market fluctuations, price movements, regulatory risks, operational risks, reliance on key personnel, uncertainties relating to interpretation of exploration results, geology and resource estimations, native title risks, foreign currency fluctuations, uncertainties relating to the availability of/access to additional capital, infrastructure or environmental approvals, and mining development, construction and commissioning risk. WC8 expressly disclaims any intention or obligation to update or revise any forward looking statements whether as a result of new information, future events, or otherwise.

To the maximum extent permitted by law, no representation, warranty or undertaking, express or implied, is made and no responsibility or liability is accepted, by the Company or any of its officers, employees, agents or consultants or any other person, as to the adequacy, accuracy, completeness or reasonableness of the information in this presentation. An investment in the shares of the Company is to be considered highly speculative. This presentation and information, opinions or conclusions expressed in the course of this presentation should be read in conjunction with WC8’s other periodic and continuous disclosure announcements lodged with the ASX, which will be available on the WC8 website.

Not an offer in the United States

This presentation has been prepared for publication in Australia and may not be released to US wire services or distributed in the United States. This presentation does not constitute an offer to sell, or a solicitation of an offer to buy, securities in the United States or any other jurisdiction. Any securities described in this presentation have not been, and will not be, registered under the US Securities Act of 1933 and may not be offered or sold in the United States except in transactions exempt from, or not subject to, the registration requirements of the US Securities Act and applicable US state securities laws.

This presentation contains information (including mineral resource, ore reserves, production targets and forecast financial information) extracted from the following ASX market announcements which are available on the Company’s website at www.wildcatresources.com.au

NEW LITHIUM DISCOVERY AT BOLT CUTTER CENTRAL – 4 AUGUST 2025

TABBA TABBA PFS CONFIRMS POTENTIAL FOR LONG-LIFE MINE – 29 JULY 2025

WILDCAT DELIVERS MRE OF 74.1MT @ 1.0% Li2O – 28 NOVEMBER 2024

Competent Person’s Statements

The information in this report that relates to Exploration Results for the Bolt Cutter Project is based on, and fairly represents, information originally reported in the company’s announcement titled “New Lithium Discovery at Bolt Cutter Central” on 4 August 2025 and was compiled by Mr Torrin Rowe (Head of Geology and Exploration at Wildcat Resources Limited), a Competent Person who is a Member of the Australian Institute of Geoscientists (AIG).

The information in this report that relates to open pit Ore Reserves for the Tabba Tabba Project is based on, and fairly represents, information originally reported in the company’s announcement titled “Tabba Tabba PFS Confirms Potential for Long Life Mine” on 29 July 2025 and compiled by Mr David Varcoe (Director / Principal Consultant) of AMC Consultants Pty Ltd (AMC), a Competent Person who is a Fellow of the Australasian Institute of Mining and Metallurgy (AUSIMM).

The information in this report that relates to underground Ore Reserves for the Tabba Tabba Project is based on, and fairly represents, information originally reported in the company’s announcement titled “Tabba Tabba PFS Confirms Potential for Long Life Mine” on 29 July 2025 and compiled by Ms Cailli Knievel (Technical Lead / Principal Consultant) of AMC Consultants Pty Ltd (AMC), a Competent Person who is a Fellow of the Australasian Institute of Mining and Metallurgy (AUSIMM).

The information in this report that relates to Mineral Resources for the Tabba Tabba Project is based on and fairly represents information originally reported in the company’s announcement titled “Wildcat D=elivers MRE of 74.1MT @ 1.0% Li2O” on 28 November 2024 and compiled by Mr Lauritz Barnes (Consultant with Trepanier) and Mr Torrin Rowe (Head of Geology and Exploration at Wildcat Resources Limited). Mr Barnes is a member of both the Australian Institute of Geoscientists and the Australasian Institute of Mining and Metallurgy and is independent of Wildcat Resources Limited. Mr Rowe is a member of the Australian Institute of Geoscientists and is a fulltime employee and shareholder of Wildcat Resources Limited.

ASX Listing Rule Information

The company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcements and, in the case of estimates of Mineral Resources or Ore Reserves, that all material assumptions and technical parameters underpinning the estimates in the original market announcements continue to apply and have not materially changed. The company confirms that all material assumptions underpinning the product targets and forecast financial information derived from a production target included in the original market announcements continue to apply and have not materially changed.

The company confirms that the form and context in which the competent persons findings have not been materially modified from the original announcement.